



CONTENTS

DISPLAY COOLER DISPLAY FREEZER DISPLAY WARMER

COUNTER TOP REFRIGERATORS.....001-032

STANDING REFRIGERATORS.....033-044

BAKERY REFRIGERATED SHOWCASE..... 045-062

OPEN REFRIGERATED SHOWCASE..... 063-084

DRY AGING.....085-088

WINE COOLER..... 089-090

SALAD SHOWCASE.....091-092

SUSHI SHOWCASE.....093-096

FREEZER SHOWCASE.....097-102

REFRIGERATED AND HOT BUFFET TROLLEY.....103-110

HOT SHOWCASE.....111-148

NEUTRAL DISPLAY.....149-154

ACCESSORIES.....155-158



FREEZER SHOWCASE

ICE CREAM DISPLAY

RTD985-1

Standard Features

- Internal LED light
- Touch screen digital controller and temperature display
- 5 adjustable PE covered shelves
- Forced air cooling
- Automatic defrost
- Thickened foaming insulation
- Auto evaporated condensation

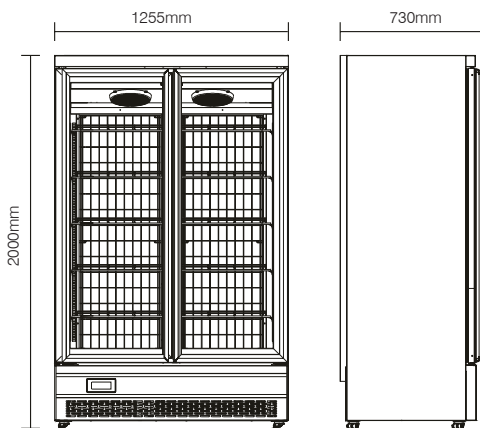

RTD985-1



RTD985-1



Model	RTD985-1
Capacity-Gross	725L
Temperature range	-18/-22℃ (-0.4/-7.6 ℉)
Rated Input Power	650W
Refrigerant	R290
Class mate	3
N.W.	209kg(460.8lbs)
G.W.	234kg(515.9lbs)
Overall Dimension	1255×730×2000mm
Overall Dimension	49.4×28.7×78.7inch
Package Dimmension	1290×775×2155mm
Package Dimmension	50.8×30.5×84.8inch
20' Container	12
40' Container	27
40' Container (high)	27
Colour	White/Black

ICE CREAM DISPLAY

RTD985-2

Standard Features

- Internal LED light
- Touch screen digital controller and temperature display
- 5 adjustable PE covered shelves
- Forced air cooling
- Automatic defrost
- 2 sides double glass
- Thickened foaming insulation
- Auto evaporated condensation

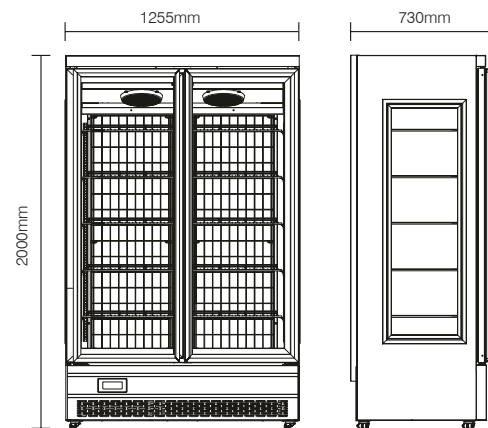

RTD985-2




RTD985-2

Model	RTD985-2
Capacity-Gross	725L
Temperature range	-18/-22℃ (-0.4/-7.6 ℉)
Rated Input Power	650W
Refrigerant	R290
Class mate	3
N.W.	243kg(535.7lbs)
G.W.	268kg(590.8lbs)
Overall Dimension	1255×730×2000mm
Overall Dimension	49.4×28.7×78.7inch
Package Dimmension	1290×775×2155mm
Package Dimmension	50.8×30.5×84.8inch
20' Container	12
40' Container	27
40' Container (high)	27
Colour	White/Black

COUNTER TOP REFRIGERATORS

FLAT GLASS DOOR

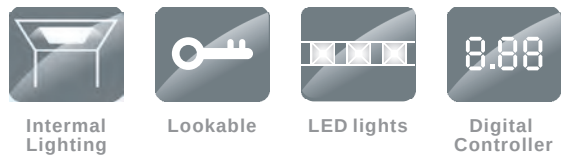

RT-78L-3



Standard Features


- Internal Top LED light
- Digital temperature controller and display
- Adjustable PVC coated shelves
- 4 sides double glass
- Maintenance free condenser
- Ventilated cooling system
- Automatic defrost
- Air duct outside the glass to remove condensation water

Options

- Lockable Door
- Adjustable chrome plated shelves
- Brilliant Internal LED illumination on sides
- Light display box with decals on top



Low energy consumption
Simple construction and high security
Air duct outside the glass to remove condensation water

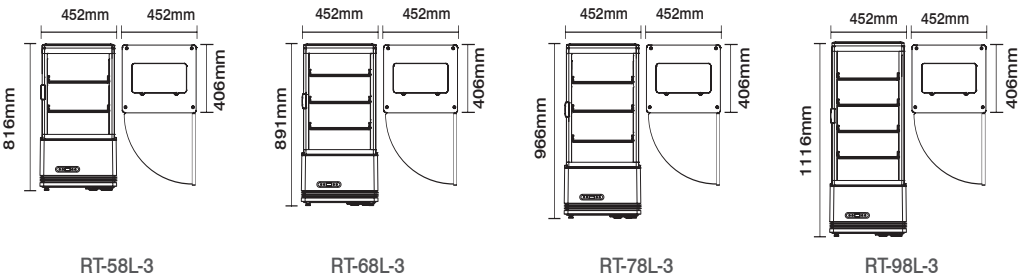

Model	RT-58L-3	RT-68L-3	RT-78L-3	RT-98L-3
Capacity-Gross	58L	68L	78L	98L
Temperature range	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)
Rated Input Power	190W / 170W	190W / 170W	190W / 170W	210W / 170W
Refrigerant	R134a / R600a	R134a / R600a	R134a / R600a	R134a / R600a
Class mate	4	4	4	4
N.W.	32kg(70.6lbs)	35kg(77.2lbs)	36kg(79.4lbs)	40kg(88.2lbs)
G.W.	34kg(75lbs)	37kg(81.6lbs)	38kg(83.8lbs)	42.5kg(93.7lbs)
Overall Dimension	452×406×816mm	452×406×891mm	452×406×966mm	452×406×1116mm
Overall Dimension	17.8×16.0×32.1inch	17.8×16.0×35.1inch	17.8×16.0×38inch	17.8×16.0×43.9inch
Package Dimmension	502×456×855mm	502×456×930mm	502×456×1005mm	502×456×1155mm
Package Dimmension	19.8×18.0×33.7inch	19.8×18.0×36.6inch	19.8×18.0×39.6inch	19.8×18.0×45.5inch
20' Container	112	112	112	112
40' Container	234	234	234	234
40' Container (high)	351	234	234	234
Colour	White/Black/Silver	White/Black/Silver	White/Black/Silver	White/Black/Silver

COUNTER TOP REFRIGERATORS

FLAT GLASS DOOR

Standard Features

- Internal Top LED light
- Digital temperature controller and display
- Adjustable PVC coated shelves
- 4 sides double glass
- Maintenance free condenser
- Ventilated cooling system
- Automatic defrost



Internal
Lighting



Lookable



LED lights



Digital
Controller




RT-78L

Options

- Lockable Door
- Adjustable chrome plated shelves
- Brilliant Internal LED illumination on sides
- Light display box with decals on top

ODIS

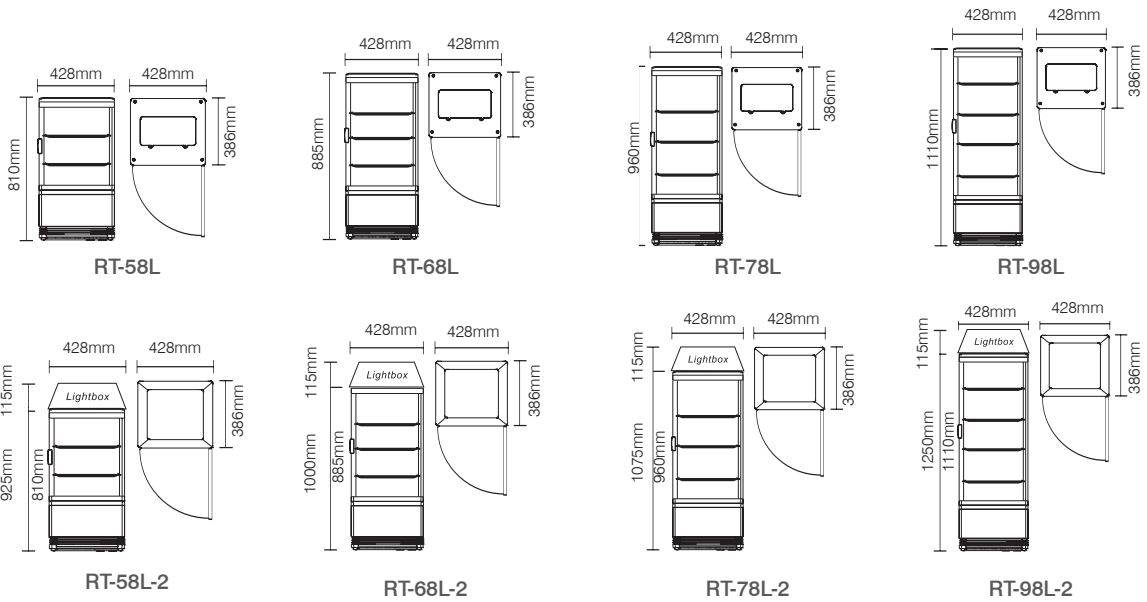


Model	RT-58L	RT-68L	RT-78L	RT-98L
Capacity-Gross	58L	68L	78L	98L
Temperature range	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)
Rated Input Power	180W	180W	180W	180W
Refrigerant	R134a / R600a	R134a / R600a	R134a / R600a	R134a / R600a
Class mate	4	4	4	4
N.W.	30kg(66.1lbs)	32.5kg(71.6lbs)	33.8kg(74.5lbs)	38kg(83.8lbs)
G.W.	32kg(70.6lbs)	35kg(77.2lbs)	36kg(79.4lbs)	40.5kg(89.3lbs)
Overall Dimension	428×386×810mm	428×386×885mm	428×386×960mm	428×386×1110mm
Overall Dimension	16.9×15.2×31.9inch	16.9×15.2×34.8inch	16.9×15.2×37.8inch	16.9×15.2×43.7inch
Package Dimmension	475×440×880mm	475×440×955mm	475×440×1030mm	475×440×1180mm
Package Dimmension	18.7×17.3×34.6inch	18.7×17.3×37.6inch	18.7×17.3×40.6inch	18.7×17.3×46.5inch
20' Container	126	126	126	124
40' Container	258	258	258	258
40' Container (high)	378	258	258	258
Colour	White/Black/Silver	White/Black/Silver	White/Black/Silver	White/Black/Silver

Model	RT-58L-2	RT-68L-2	RT-78L-2	RT-98L-2
Capacity-Gross	58L	68L	78L	98L
Temperature range	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)
Rated Input Power	180W	180W	180W	180W
Refrigerant	R134a / R600a	R134a / R600a	R134a / R600a	R134a / R600a
Class mate	4	4	4	4
N.W.	31kg(68.3lbs)	33.5kg(73.9lbs)	34.8kg(76.7lbs)	39kg(86.0lbs)
G.W.	33kg(72.8lbs)	36kg(79.4lbs)	37kg(81.6lbs)	42kg(92.6lbs)
Overall Dimension	428×386×925mm	428×386×1000mm	428×386×1075mm	428×386×1250mm
Overall Dimension	16.9×15.2×36.4inch	16.9×15.2×39.4inch	16.9×15.2×42.3inch	16.9×15.2×49.2inch
Package Dimmension	475×440×995mm	475×440×1070mm	475×440×1145mm	475×440×1310mm
Package Dimmension	18.7×17.3×39.2inch	18.7×17.3×42.1inch	18.7×17.3×45.1inch	18.7×17.3×51.6inch
20' Container	126	126	126	124
40' Container	258	258	258	258
40' Container (high)	258	258	258	258
Colour	White/Black/Silver	White/Black/Silver	White/Black/Silver	White/Black/Silver

COUNTER TOP REFRIGERATORS

CURVED GLASS DOOR

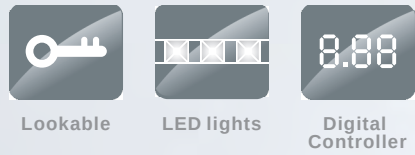


RT-78L(1R)

Standard Features

- LED light at 2 front sides
- Digital temperature controller and display
- Adjustable PVC coated shelves
- Front curved glass door
- 4 sides double glass
- Maintenance free condenser
- Ventilated cooling system
- Automatic defrost
- RT-58L(1R)/ RT-68L(1R)/ RT-78L(1R)/ RT-98L(1R)
- Front curved glass Door
- RT-58L(2R)/ RT-68L(2R)/ RT-78L(2R)/ RT-98L(2R)
- Front and Back 2 curved glass Door

Options

- Lockable Door
- Adjustable chrome plated shelves
- LED light at 4 sides
- Light display at bottom

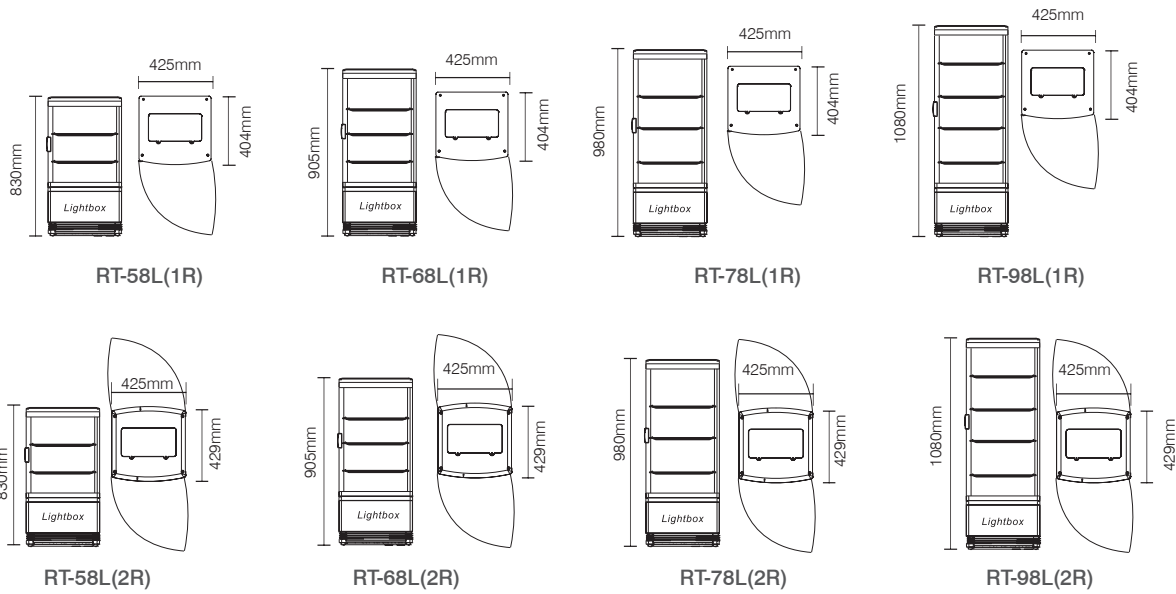

Model	RT-58L(1R)	RT-68L(1R)	RT-78L(1R)	RT-98L(1R)
Capacity-Gross	61L	72L	82L	96L
Temperature range	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)
Rated Input Power	180W	180W	180W	180W
Refrigerant	R134a / R600a	R134a / R600a	R134a / R600a	R134a / R600a
Class mate	4	4	4	4
N.W.	32.5kg(71.7lbs)	34kg(75.0lbs)	36kg(79.4lbs)	38.5kg(84.9lbs)
G.W.	34.5kg(76.1lbs)	36.5kg(80.5lbs)	38.5kg(84.9lbs)	41kg(90.4lbs)
Overall Dimension	425×404×830mm	425×404×905mm	425×404×980mm	425×404×1080mm
Overall Dimension	16.7×15.9×32.7inch	16.7×15.9×35.6inch	16.7×15.9×38.6inch	16.7×15.9×42.5inch
Package Dimmension	480×450×875mm	480×450×950mm	480×450×1025mm	480×450×1125mm
Package Dimmension	18.9×17.7×34.4inch	18.9×17.7×37.4inch	18.9×17.7×40.4inch	18.9×17.7×44.3inch
20' Container	112	112	112	112
40' Container	240	240	240	240
40' Container (high)	360	240	240	240
Colour	White/Black/Silver	White/Black/Silver	White/Black/Silver	White/Black/Silver

Model	RT-58L(2R)	RT-68L(2R)	RT-78L(2R)	RT-98L(2R)
Capacity-Gross	64L	75L	86L	98L
Temperature range	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)
Rated Input Power	180W	180W	180W	180W
Refrigerant	R134a / R600a	R134a / R600a	R134a / R600a	R134a / R600a
Class mate	4	4	4	4
N.W.	33.5kg(73.9lbs)	35kg(77.2lbs)	36.5kg(80.5lbs)	39kg(86.0lbs)
G.W.	35.5kg(78.3lbs)	37.5kg(82.7lbs)	39kg(86.0lbs)	41.5kg(91.5lbs)
Overall Dimension	429×425×830mm	429×425×905mm	429×425×980mm	429×425×1080mm
Overall Dimension	16.9×16.7×32.7inch	16.9×16.7×35.6inch	16.9×16.7×38.6inch	16.9×16.7×42.5inch
Package Dimmension	480×480×875mm	480×480×950mm	480×480×1025mm	480×480×1125mm
Package Dimmension	18.9×18.9×34.4inch	18.9×18.9×37.4inch	18.9×18.9×40.4inch	18.9×18.9×44.3inch
20' Container	88	88	88	88
40' Container	192	192	192	192
40' Container (high)	288	192	192	192
Colour	White/Black/Silver	White/Black/Silver	White/Black/Silver	White/Black/Silver

COUNTER TOP REFRIGERATORS
WITH STAINLESS STEEL BASE



LED lights




Digital
Controller



RT-78L-7



RT-78L-8

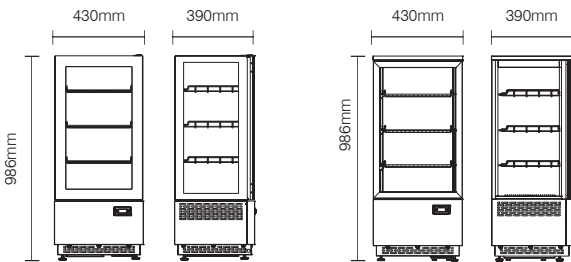

RT-78L-7

RT-78L-8

Standard Features

- Brilliant Internal LED illumination on 4 sides
- Digital temperature controller and display
- Adjustable chrome plated shelves
- 4 sides double glass
- Maintenance free condenser
- Ventilated cooling system
- Automatic defrost
- Adjustable feet
- Stainless steel

Model	RT-78L-7	RT-78L-8
Capacity-Gross	78L	78L
Temperature range	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)
Rated Input Power	180W	180W
Refrigerant	R134a / R600a	R134a / R600a
Class mate	4	4
N.W.	50.5kg(111.3lbs)	40.5kg(89.3lbs)
G.W.	53kg(116.8lbs)	43kg(94.8lbs)
Overall Dimension	430x390x986mm	430x390x986mm
Overall Dimension	16.9x15.4×38.8inch	16.9x15.4×38.8inch
Package Dimmension	485×445×1020mm	485x445x1020mm
Package Dimmension	19.1x17.5×40.2inch	19.1x17.5x40.2inch
20' Container	122	122
40' Container	238	238
40' Container (high)	238	238

ODIS

GLASS DOOR DISPLAY

RT-49L/49L-2/99L/99L-2/109L/109L-2

Standard Features

- Brilliant internal LED illumination on top
- Digital temperature controller and display
- Triple glass door
- Automatic closing door
- Adjustable PVC coated shelf
- Adjustable feet
- Ventilated cooling system
- Automatic defrost
- Maintenance free condenser
- Lockable Door
- Top light display

RT-49L-2/RT-99L-2/RT-109L-2
With TOP light box



Lookable



LED lights




Digital
Controller



RT-99L



RT-99L-2

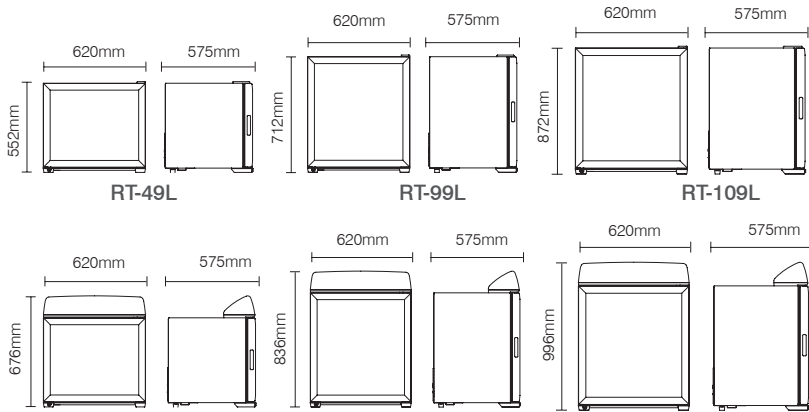

RT-49L

RT-99L

RT-109L

RT-49L-2

RT-99L-2

RT-109L-2

Model	RT-49L	RT-49L-2	RT-99L	RT-99L-2	RT-109L	RT-109L-2
Capacity-Gross	55L	55L	90L	90L	112L	112L
Temperature range	0-10°C (32-50 °F)	0-10°C (32-50 °F)	0-10°C (32-50 °F)	0-10°C (32-50 °F)	0-10°C (32-50 °F)	0-10°C (32-50 °F)
Defrost Power	100W / 90W	100W / 90W	140W	140W	140W	140W
Refrigerant	R134a / R600a	R134a / R600a	R134a / R600a	R134a / R600a	R134a / R600a	R134a / R600a
Class mate	4	4	4	4	4	4
N.W.	35kg(77.2lbs)	36kg(79.4lbs)	41kg(90.4lbs)	42kg(92.6lbs)	56.5kg(124.6lbs)	57.5kg(126.8lbs)
G.W.	38kg(83.8lbs)	39kg(86.0lbs)	44kg(97.0lbs)	45kg(99.2lbs)	59.5kg(131.2lbs)	60.5kg(133.4lbs)
Overall Dimension	620×534×552mm	620×534×676mm	620×534×712mm	620×534×836mm	620×575×872mm	620×575×996mm
Overall Dimension	24.4 x 21.0×21.7inch	24.4 x 21.0×26.6inch	24.4 x 21.0×28.0inch	24.4 x 21.0×32.9inch	24.4×22.6×34.3inch	24.4×22.6×39.2inch
Package Dimmension	700×655×605mm	700×655×745mm	700×655×765mm	700×655×905mm	700×655×925mm	700×655×1065mm
Package Dimmension	27.6 x 25.8×23.8inch	27.6 x 25.8×29.3inch	27.6 x 25.8×30.1inch	27.6 x 25.8×35.6inch	27.6×25.8×36.4inch	27.6×25.8×41.9inch
20' Container	72	72	72	48	48	48
40' Container	162	162	162	108	108	108
40' Container (high)	216	162	162	108	108	108

COUNTER TOP REFRIGERATORS
STAINLESS STEEL



LED lights



Digital
Controller



RT-101L & RT-177L


ODIS

Standard Features

- Brilliant Internal LED illumination on 4 sides
- Digital temperature controller and display
- Triple glass door
- Adjustable chrome plated shelves
- Ventilated cooling system
- Adjustable feet
- Automatic defrost



RT-128L

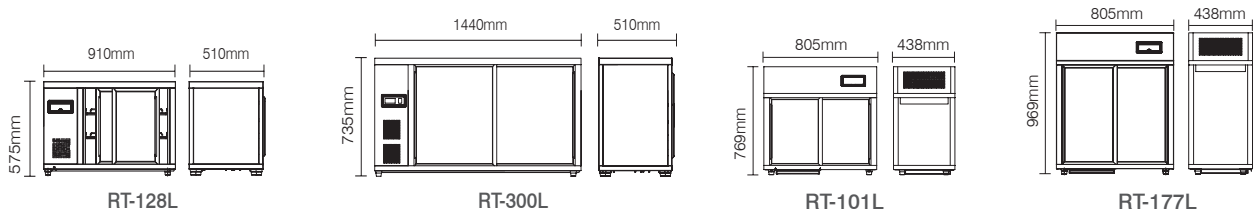

Model	RT-128L	RT-300L	RT-101L	RT-177L
Capacity-Gross	128L	300L	101L	177L
Temperature range	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)
Rated Input Power	253W / 370W	390W / 370W	420W / 350W	380W / 350W
Refrigerant	R134a / R290	R134a / R290	R134a / R290	R134a / R290
Class mate	4	4	4	4
N.W.	58kg(127.9lbs)	90kg(198.4lbs)	65kg(143.3lbs)	77kg(169.8lbs)
G.W.	61kg(134.5lbs)	93kg(205.0lbs)	68kg(149.9lbs)	80kg(176.4lbs)
Overall Dimension	910×510×575mm	1440×510×735mm	805×438×769mm	805×438×969mm
Overall Dimension	35.8×20.1×22.6inch	56.7×20.1×28.9inch	31.7×17.2×30.3inch	31.7×17.2×38.1inch
Package Dimmension	1000×600×630mm	1530×600×780mm	894×532×800mm	894×532×1000mm
Package Dimmension	39.4×23.6×24.8inch	60.2×23.6×30.7inch	35.2×20.9×31.5inch	35.2×20.9×39.4inch
20' Container	60	36	56	56
40' Container	126	78	114	114
40' Container (high)	168	78	171	171

COUNTER TOP REFRIGERATORS

COOLING SYSTEM ON TOP

Compressor on top to avoid any damages caused by food residue. Cold and hot air exchange on top, so no need for extra space around the unit.



RTW-108L
Standard Features
Brilliant Internal LED illumination on sides
Digital temperature controller and display
Cooling system on top
Rotational chrome plated shelves
4 sides double Glass
Adjustable feet
Maintenance free condenser
Ventilated cooling system
Automatic defrost


RTW-108L

COOLING SYSTEM ON TOP



RTD-80L
Standard Features
Brilliant Internal LED illumination on sides
Digital temperature controller and display
Adjustable PVC coated shelves
4 sides Double glass
Cooling system on top
Maintenance free condenser
Ventilated cooling system
Automatic defrost

Options
Lockable Door
Adjustable chrome plated shelves

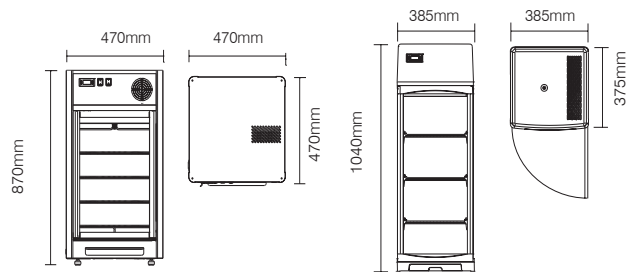

RTW-108L

RTD-80L



RTD-80L

Model	RTW-108L	RTD-80L
Capacity-Gross	108L	80L
Temperature range	2-10°C (35.6-50 °F)	2-12°C (35.6-53.6 °F)
Rated Input Power	230W	160W / 142W
Refrigerant	R134a / R600a	R134a / R600a
Class mate	4	4
N.W.	52kg(114.6lbs)	37.5kg(82.7lbs)
G.W.	54kg(119.0lbs)	39.5kg(87.1lbs)
Overall Dimension	470×470×870mm	385×375×1040mm
Overall Dimension	18.5×18.5×34.3inch	15.2×14.8×40.9inch
Package Dimmension	560×530×938mm	435×435×1085mm
Package Dimmension	22.0×20.9×36.9inch	17.1×17.1×42.7inch
20' Container	80	130
40' Container	168	260
40' Container (high)	168	260
Colour	Stainless Steel	White/Black

COUNTER TOP REFRIGERATORS

BUILT-IN REFRIGERATOR

ARC-180L/260L

Standard Features


- Digital temperature controller and display
- Each shelf with LED lights
- 4 sides double glass
- Ventilated cooling system
- Automatic defrost
- Shelves retractable




ARC-180L & ARC-260L



ARC-180L

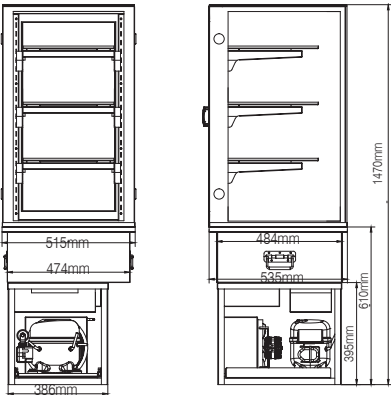

ARC-180L

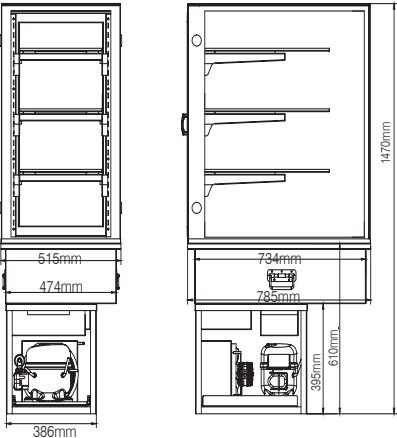


ARC-260L

Model	ARC-180L	ARC-260L
Capacity-Gross	180L	260L
Temperature range	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)
Rated Input Power	500W	500W
Refrigerant	R290	R290
Class mate	4	4
N.W.	98kg(216.1lbs)	118kg(260.1lbs)
G.W.	116kg(255.7lbs)	139kg(306.4lbs)
Overall Dimension	515×535×1470mm	515×785×1470mm
Overall Dimension	20.3×21.1×57.9inch	20.3×30.9×57.9inch
Package Dimmension	600×635×1595mm	600×885×1595mm
Package Dimmension	23.6×25.0×62.8inch	23.6×27.0×62.8inch
20' Container	27	21
40' Container	54	45
40' Container (high)	54	45


COUNTER TOP REFRIGERATORS

COUNTERTOP DISPLAYS



Standard Features

- LED
- Automatic defrost
- glass shelf
- Condenser can be cleaned
- Sliding door at back side and top side

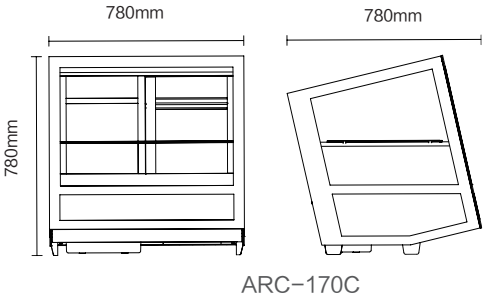

ARC-170C

Model	ARC-170C
Capacity-Gross	165L
Temperature range	0-12°C (32-53.6 °F)
Rated Input Power	320W
Refrigerant	R290
Class mate	4
N.W.	76.5kg(168.7lbs)
G.W.	96.5kg(217.7lbs)
Overall Dimension	780×780×780mm
Overall Dimension	30.7×30.7×30.7inch
Package Dimmension	900×920×950mm
Package Dimmension	35.4×36.2×37.4inch
20' Container	24
40' Container	48
40' Container (high)	48




COUNTERTOP DISPLAYS

- RTW-40L**
- Standard Features**
- Digital temperature controller and display
 - Automatic defrost
 - Direct cooling system
 - Single tempered glass
 - Stainless steel base panel



RTW-40L

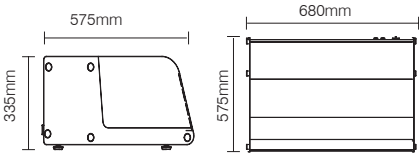

RTW-40L

Model	RTW-40L
Capacity-Gross	40L
Temperature range	2-12°C (35.6-53.6 °F)
Rated Input Power	110W / 105W
Refrigerant	R134a / R600a
Class mate	4
N.W.	25kg(55.1lbs)
G.W.	27kg(59.5lbs)
Overall Dimension	680×575×335mm
Overall Dimension	26.8×22.6×13.2inch
Package Dimmension	730×650×400mm
Package Dimmension	28.7×25.6×15.7inch
20' Container	120
40' Container	255
40' Container (high)	306

COUNTER TOP REFRIGERATORS

COUNTERTOP DISPLAYS



RTW-67L



RTW-77L

RTW-77L/RTW-87L

Standard Features

- Standard Features
- Digital temperature controller and display
- 4x5L pan or 8x1/6 pan
- Automatic defrost
- Direct cooling system
- Stainless Steel
- Folding flat glass cover
- On/off switch
- Adjustable feet



RTW-67L-1


RTW-67L/RTW-67L-1

Standard Features

- Digital temperature controller and display
- 8*1/6 GN PAN or 4*1/3 GN PAN
- Automatic defrost
- Direct cooling system
- Stainless Steel
- Folding complete glass cover
- On/off switch
- Adjustable feet

Options:

Plastic Chopping board



RTW-67L

RTW-67L-1

RTW-77L

RTW-87L

Model	RTW-67L	RTW-67L-1	RTW-77L	RTW-87L
Capacity-Gross	67L	67L	77L	87L
Temperature range	2-12°C (35.6-53.6 °F)	2-12°C (35.6-53.6 °F)	2-12°C (35.6-53.6 °F)	2-8°C (35.6-46.4 °F)
Rated Input Power	110W / 105W	110W / 105W	150W / 105W	220W
Refrigerant	R134a / R600a	R134a / R600a	R134a / R600a	R290
Class mate	4	4	4	4
N.W.	25kg(55.1lbs)	27kg(59.5lbs)	32kg(70.5lbs)	47kg(103.6lbs)
G.W.	27kg(59.5lbs)	29kg(63.9lbs)	36.5kg(80.5lbs)	51kg(112.4lbs)
Overall Dimension	767×612×328mm	1085×477×328mm	805×666×305mm	867×735×339mm
Overall Dimension	30.2×24.1×12.9inch	42.7×18.8×12.9inch	31.7×26.2×12.0inch	34.1×28.9×13.3inch
Package Dimmension	850×690×390mm	1155×551×390mm	875×740×420mm	989×874×433mm
Package Dimmension	33.5×27.2×15.4inch	45.5×21.7×15.4inch	34.4×29.1×16.5inch	38.9×34.4×17.0inch
20' Container	105	100	114	48
40' Container	215	210	234	104
40' Container (high)	258	252	273	130

COUNTERTOP DISPLAYS

RTW-118L/140L/128L/170L

Standard Features

- Digital temperature controller and display
- Automatic defrost
- Direct cooling system
- Stainless Steel
- Folding complete glass coner
- On/off switch
- Adjustable feet



RTW-118L




RTW-128L



RTW-118L

RTW-128L

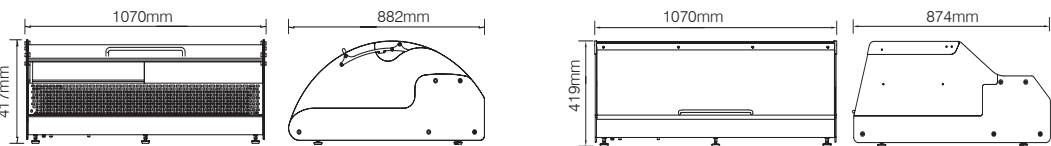

RTW-140L

RTW-170L

Model	RTW-118L	RTW-140L	RTW-128L	RTW-170L
Capacity-Gross	118L	140L	128L	170L
Temperature range	2-12°C (35.6-53.6 °F)	2-12°C (35.6-53.6 °F)	2-12°C (35.6-53.6 °F)	2-12°C (35.6-53.6 °F)
Rated Input Power	110W / 105W	130W	110W / 105W	130W
Refrigerant	R134a / R600a	R134a	R134a / R600a	R134a
Class mate	4	4	4	4
N.W.	38.5kg(84.9lbs)	49.5kg(109.1lbs)	42kg(92.6lbs)	54kg(119.0lbs)
G.W.	41kg(90.4lbs)	53.5kg(117.9lbs)	45kg(99.2lbs)	58kg(127.9lbs)
Overall Dimension	695×882×417mm	1070×882×417mm	685×874×419mm	1070×874×419mm
Overall Dimension	27.4×34.7×16.4inch	42.1×34.7×16.4inch	27.0×34.4×16.5inch	42.1×34.4×16.5inch
Package Dimmension	775×955×490mm	1180×955×490mm	775×955×490mm	1180×955×490mm
Package Dimmension	30.5×37.6×19.3inch	46.5×37.6×19.3inch	30.5×37.6×19.3inch	46.5×37.6×19.3inch
20' Container	56	40	56	40
40' Container	112	88	112	88
40' Container (high)	140	110	140	110

COUNTER TOP REFRIGERATORS

COUNTERTOP DISPLAYS



RTW-100L

RTW-100L
Standard Features
 Digital temperature controller and display
 Brilliant Internal LED illumination on 2 sides
 Adjustable PVC coated shelves
 4 sides double glass
 Front Curved glass
 Sliding doors
 Maintenance free condenser
 Ventilated cooling system
 Automatic defrost

Options
 Adjustable chrome plated shelves
 Internal top T4 lighting
 Adjustable temperature controller

COUNTERTOP DISPLAYS

RTW-100L-2/100L-3
Standard Features
 Brilliant Internal LED illumination
 Digital temperature controller and display
 Adjustable chrome plated shelves
 4 sides double glass
 Front Curved glass
 Sliding doors
 Maintenance free condenser
 Ventilated cooling system
 Automatic defrost


RTW-100L-3
 Air duct outside the glass to remove condensation water




RTW-100L-2



RTW-100L-3

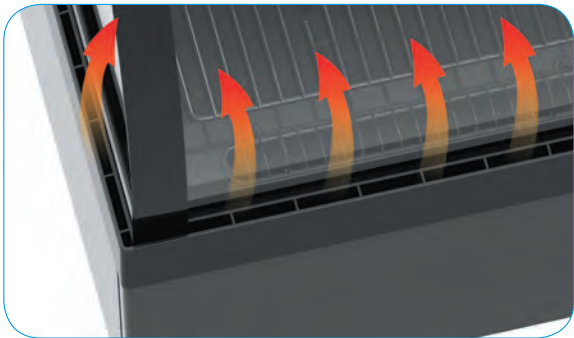

Low energy consumption
Simple construction and high security
Air duct outside the glass to remove condensation water

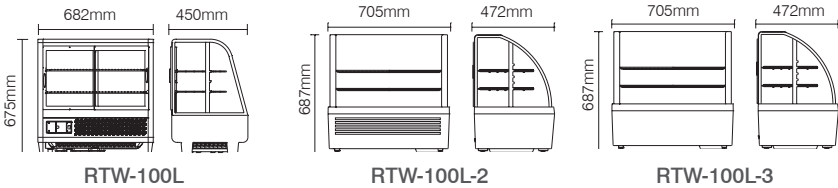

Model	RTW-100L	RTW-100L-2	RTW-100L-3
Capacity-Gross	100L	100L	100L
Temperature range	0-12°C (32-53.6 °F)	2-10°C (35.6-50 °F)	0-12°C (32-53.6 °F)
Rated Input Power	160W / 160W / 200W	190W / 195W / 200W	190W / 195W / 200W
Refrigerant	R134a / R600a / R290	R134a / R600a / R290	R134a / R600a / R290
Class mate	4	4	4
N.W.	39.1kg(86.2lbs)	39kg(86.0lbs)	39kg(86.0lbs)
G.W.	42.5kg(93.7lbs)	42.5kg(93.7lbs)	42.5kg(93.7lbs)
Overall Dimension	682×450×675mm	705×472×687mm	705×472×687mm
Overall Dimension	26.9×17.7×26.6inch	27.8×18.6×27.0inch	27.8×18.6×27.0inch
Package Dimmension	756×524×760mm	756×524×735mm	756×524×735mm
Package Dimmension	29.8×20.6×29.9inch	29.8×20.6×28.9inch	29.8×20.6×28.9inch
20' Container	90	90	90
40' Container	189	189	189
40' Container (high)	189	189	189
Color	White/Black/Silver	Black	Black

COUNTER TOP REFRIGERATORS

COUNTERTOP DISPLAYS


RTW-105L

Standard Features

- Brilliant Internal LED illumination on top
- Digital temperature controller and display
- Adjustable chrome plated shelves
- 4 sides double glass
- Front Curved glass
- Sliding doors
- Maintenance free condenser
- Ventilated cooling system
- Automatic defrost
- Stainless steel



LED lights Digital Controller

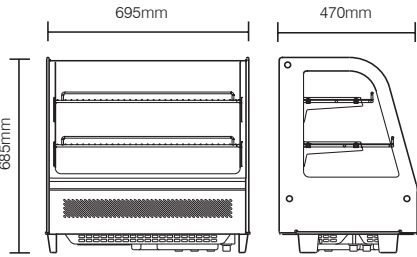

RTW-105L



Model	RTW-105L
Capacity-Gross	100L
Temperature range	0-12°C (32-53.6 °F)
Rated Input Power	160W / 160W / 200W
Refrigerant	R134a / R600a / R290
Class mate	4
N.W.	53.5kg(117.9lbs)
G.W.	57kg(125.7lbs)
Overall Dimension	695×470×685mm
Overall Dimension	27.4×18.5×27.0inch
Package Dimmension	775×545×760mm
Package Dimmension	30.5×21.5×29.9inch
20' Container	99
40' Container	204
40' Container (high)	204
Color	Black

COUNTERTOP DISPLAYS



RTW-120L/160L/202L/252L

Standard Features


- Brilliant Internal LED illumination on top
- Digital temperature controller and display
- Adjustable chrome plated shelves
- 4 sides double glass
- Front Curved glass
- Sliding doors
- Maintenance free condenser
- Ventilated cooling system
- Automatic defrost
- Stainless steel



LED lights Digital Controller



RTW-160L

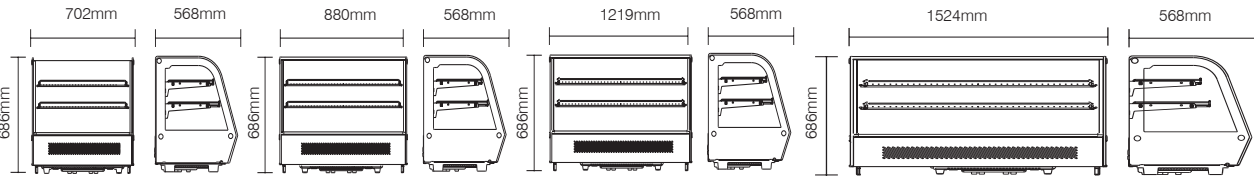

RTW-120L

RTW-160L

RTW-202L

RTW-252L

Model	RTW-120L	RTW-160L	RTW-202L	RTW-252L
Capacity-Gross	120L	160L	200L	252L
Temperature range	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)
Rated Input Power	230W / 160W / 230W	230W / 200W / 230W	400W / 400W	400W
Refrigerant	R134a / R600a / R290	R134a / R600a / R290	R134a / R290	R290
Class mate	4	4	4	4
N.W.	57kg(125.7lbs)	66kg(145.5lbs)	90kg(198.4lbs)	115kg(253.5lbs)
G.W.	60kg(132.3lbs)	69.5kg(153.2lbs)	94kg(207.2lbs)	134kg(295.4lbs)
Overall Dimension	702×568×686mm	880×568×686mm	1219×568×686mm	1524×568×686mm
Overall Dimension	27.6×22.4×27.0inch	34.6×22.4×27.0inch	48.0×22.4×27.0inch	60.0×22.4×27.0inch
Package Dimmension	773×627×735mm	951×627×735mm	1290x627x735mm	1595x627x735mm
Package Dimmension	30.4×24.7×28.9inch	37.4×24.7×28.9inch	50.8x24.7x28.9inch	62.8x24.7x28.9inch
20' Container	81	63	39	36
40' Container	162	126	84	75
40' Container (high)	162	126	84	75
Color	Black	Black	Black	Black

COUNTER TOP REFRIGERATORS

COUNTERTOP DISPLAYS

RTW-120L-3/160L-3/202L-3/252L-3

Standard Features

- Brilliant Internal LED illumination on top
- Digital temperature controller and display
- Adjustable chrome plated shelves
- 4 sides double glass
- Front flat glass
- Sliding doors
- Maintenance free condenser
- Ventilated cooling system
- Automatic defrost
- Stainless steel




LED lights



Digital Controller



RTW-160L-3

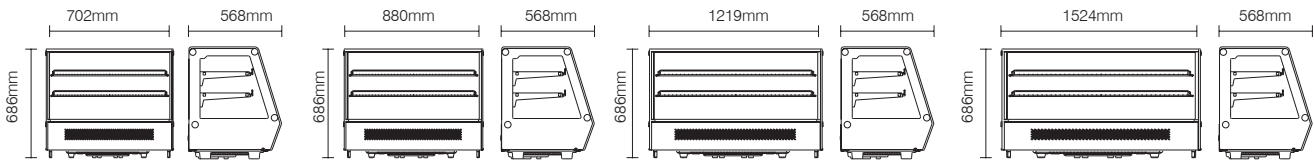

RTW-120L-3

RTW-160L-3

RTW-202L-3

RTW-252L-3

Model	RTW-120L-3	RTW-160L-3	RTW-202L-3	RTW-252L-3
Capacity-Gross	120L	160L	200L	252L
Temperature range	0-12℃ (32-53.6 °F)	0-12℃ (32-53.6 °F)	0-12℃ (32-53.6 °F)	0-12℃ (32-53.6 °F)
Rated Input Power	230W / 160W / 230W	230W / 160W / 230W	400W / 360W	400W
Refrigerant	R134a / R600a / R290	R134a / R600a / R290	R134a / R290	R290
Class mate	4	4	4	4
N.W.	57kg(125.7lbs)	67kg(147.7lbs)	90kg(198.4lbs)	116kg(255.7lbs)
G.W.	60kg(132.3lbs)	69.5kg(153.2lbs)	94kg(207.2lbs)	135kg(297.6lbs)
Overall Dimension	702×568×686mm	880×568×686mm	1219×568×686mm	1524×568×686mm
Overall Dimension	27.6×22.4×27.0inch	34.6×22.4×27.0inch	48.0×22.4×27.0inch	60.0×22.4×27.0inch
Package Dimmension	773×627×735mm	951×627×735mm	1290×627×735mm	1595×627×735mm
Package Dimmension	30.4×24.7×28.9inch	37.4×24.7×28.9inch	50.8×24.7×28.9inch	62.8×24.7×28.9inch
20' Container	81	63	39	36
40' Container	162	126	84	75
40' Container (high)	162	126	84	75
Color	Black	Black	Black	Black

COUNTERTOP DISPLAYS

RTW-125L/165L/202L/256L

Standard Features

- Brilliant Internal LED illumination on top
- Digital temperature controller and display
- Adjustable chrome plated shelves
- 4 sides double glass
- Front and back sliding doors
- Maintenance free condenser
- Ventilated cooling system
- Automatic defrost
- Stainless steel




LED lights



Digital Controller



RTW-125L

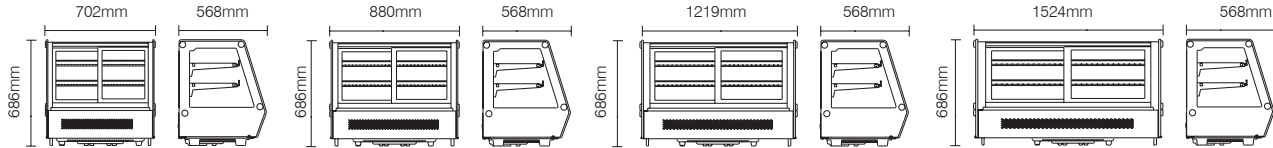

RTW-125L

RTW-165L


RTW-205L

RTW-256L

Model	RTW-125L	RTW-165L	RTW-205L	RTW-256L
Capacity-Gross	125L	160L	200L	256L
Temperature range	0-12℃ (32-53.6 °F)	0-12℃ (32-53.6 °F)	0-12℃ (32-53.6 °F)	0-12℃ (32-53.6 °F)
Rated Input Power	230W / 160W / 230W	230W / 160W / 230W	400W / 360W	400W
Refrigerant	R134a / R600a / R290	R134a / R600a / R290	R134a / R290	R290
Class mate	4	4	4	4
N.W.	54kg(119lbs)	66kg(145.5lbs)	90kg(198.4lbs)	112kg(246.9lbs)
G.W.	56kg(123.5lbs)	69.5kg(153.2lbs)	94kg(207.2lbs)	131kg(288.8lbs)
Overall Dimension	702×568×686mm	880×568×686mm	1219×568×686mm	1524×568×686mm
Overall Dimension	27.6×22.4×27.0inch	34.6×22.4×27.0inch	48.0×22.4×27.0inch	60.0×22.4×27.0inch
Package Dimmension	773×627×735mm	951×627×735mm	1290×627×735mm	1595×627×735mm
Package Dimmension	30.4×24.7×28.9inch	37.4×24.7×28.9inch	50.8×24.7×28.9inch	62.8×24.7×28.9inch
20' Container	81	63	39	36
40' Container	162	126	84	75
40' Container (high)	162	126	84	75
Color	Black	Black	Black	Black

COUNTER TOP REFRIGERATORS

COUNTERTOP DISPLAYS



LED lights



Digital Controller



COUNTERTOP DISPLAYS



RTW-120L-4/160L-4/202L-4/252L-4

Standard Features

- Brilliant Internal LED illumination on top
- Digital temperature controller and display
- Adjustable chrome plated shelves
- 4 sides double glass
- Front Curved glass
- Sliding doors
- Maintenance free condenser
- Ventilated cooling system
- Automatic defrost
- Stainless steel
- Air duct outside the glass to remove condensation water



LED lights





Digital Controller



RTW-160L-4

Low energy consumption
Simple construction and high security
Air duct outside the glass to remove condensation water

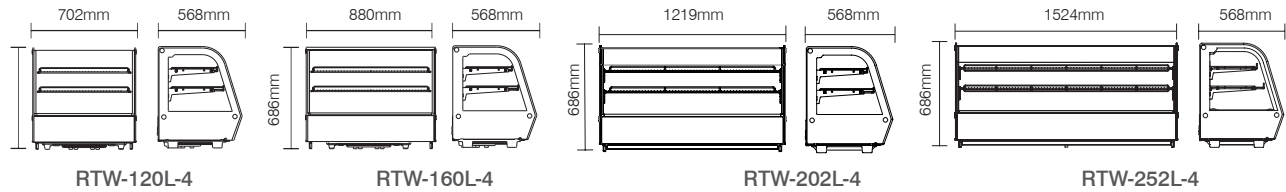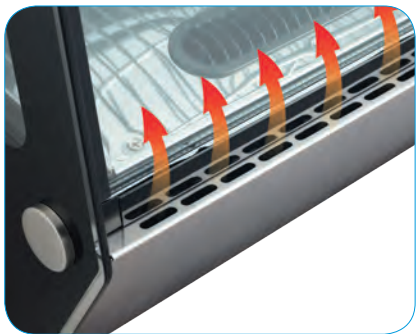

Model	RTW-120L-4	RTW-160L-4	RTW-202L-4	RTW-252L-4
Capacity-Gross	120L	160L	200L	252L
Temperature range	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)
Rated Input Power	230W / 160W / 230W	230W / 160W / 230W	400W / 400W	490W
Refrigerant	R134a / R600a /R290	R134a / R600a / R290	R134a / R290	R290
Class mate	4	4	4	4
N.W.	57kg(125.7lbs)	66kg(145.5lbs)	88.5kg(195.1lbs)	115kg(253.5lbs)
G.W.	60kg(132.3lbs)	69.5kg(153.2lbs)	92.5kg(203.9lbs)	134kg(295.4lbs)
Overall Dimension	702×568×686mm	880×568×686mm	1219×568×686mm	1524×568×686mm
Overall Dimension	27.6×22.4×27.0inch	34.6×22.4×27.0inch	48.0×22.4×27.0inch	60.0×22.4×27.0inch
Package Dimmension	773×627×735mm	951×627×735mm	1290×627×735mm	1595×627×735mm
Package Dimmension	30.4×24.7×28.9inch	37.4×24.7×28.9inch	50.8×24.7x28.9inch	62.8x24.7x28.9inch
20' Container	81	63	39	36
40' Container	162	126	84	75
40' Container (high)	162	126	84	75
Color	Black	Black	Black	Black

COUNTER TOP REFRIGERATORS

COUNTERTOP DISPLAYS

RTW-120L-5/160L-5/202L-5/252L-5

Standard Features

- Brilliant Internal LED illumination on top
- Digital temperature controller and display
- Adjustable chrome plated shelves
- 4 sides double glass
- Front flat glass
- Sliding doors
- Maintenance free condenser
- Ventilated cooling system
- Automatic defrost
- Stainless steel

Options

- Air duct outside the glass to remove condensation water




RTW-160L-5

Low energy consumption

Simple construction and high security

Air duct outside the glass to remove condensation water

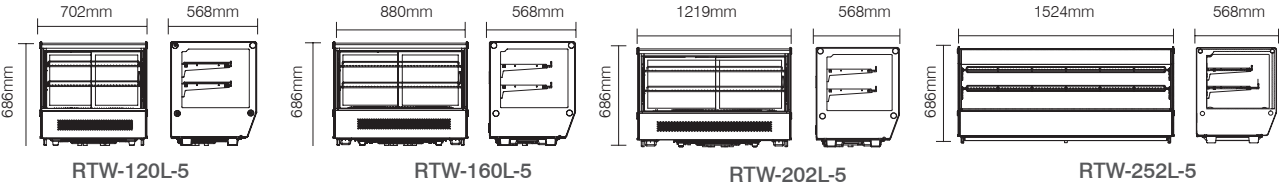

Model	RTW-120L-5	RTW-160L-5	RTW-202L-5	RTW-252L-5
Capacity-Gross	120L	160L	200L	252L
Temperature range	0-12℃ (32-53.6 ℉)	0-12℃ (32-53.6 ℉)	0-12℃ (32-53.6 ℉)	0-12℃ (32-53.6 ℉)
Rated Input Power	230W / 160W / 230W	230W / 160W / 230W	400W / 400W	490W
Refrigerant	R134a / R600a / R290	R134a / R600a / R290	R134a / R290	R290
Class mate	4	4	4	4
N.W.	57kg(125.7lbs)	66kg(145.5lbs)	90kg(198.4lbs)	116kg(255.7lbs)
G.W.	60kg(132.3lbs)	69.5kg(153.2lbs)	94kg(207.2lbs)	135kg(297.6lbs)
Overall Dimension	702×568×686mm	880×568×686mm	1219×568×686mm	1524×568×686mm
Overall Dimension	27.6×22.4×27.0inch	34.6×22.4×27.0inch	48.0×22.4×27.0inch	60.0×22.4×27.0inch
Package Dimmension	773×627×735mm	951×627×735mm	1290x627x735mm	1595x627x735mm
Package Dimmension	30.4×24.7×28.9inch	37.4×24.7×28.9inch	50.8x24.7x28.9inch	62.8x24.7x28.9inch
20' Container	81	63	39	36
40' Container	162	126	84	75
40' Container (high)	162	126	84	75
Color	Black	Black	Black	Black

COUNTERTOP DISPLAYS



LED lights




Digital Controller

RTW-130L-1/160L-2

Standard Features

- Brilliant Internal LED illumination on top
- Digital temperature controller and display
- Adjustable chrome plated shelves
- 4 sides double glass
- Sliding doors
- Ventilated cooling system
- Automatic defrost
- Stainless steel

RTW-130L-1 & RTW-160L-2

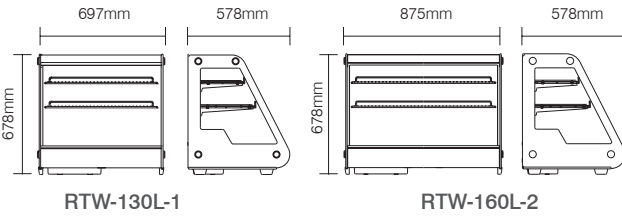

Model	RTW-130L-1	RTW-160L-2
Capacity-Gross	130L	160L
Temperature range	0-12℃ (32-53.6 ℉)	0-12℃ (32-53.6 ℉)
Rated Input Power	230W / 180W	230W / 180W
Refrigerant	R134a / R600a	R134a / R600a
Class mate	4	4
N.W.	55kg(121.3lbs)	63kg(138.9lbs)
G.W.	57kg(125.7lbs)	65kg(143.3lbs)
Overall Dimension	697×578×678mm	875×578×678mm
Overall Dimension	27.4×22.8×26.7inch	34.4×22.8×26.7inch
Package Dimmension	773×627×735mm	951×627×735mm
Package Dimmension	30.4×24.7×28.9inch	37.4×24.7×28.9inch
20' Container	81	60
40' Container	162	123
40' Container (high)	162	123
Color	Black	Black

COUNTER TOP REFRIGERATORS

COUNTERTOP DISPLAYS




RTW-185L

RTW-185L

Standard Features

Brilliant Internal LED illumination on top
Digital temperature controller and display
One non-adjustable glass shelf
4 sides single glass
Front Curved glass
Top glass set can be moved easy
Maintenance free condenser
Ventilated cooling system
Automatic defrost

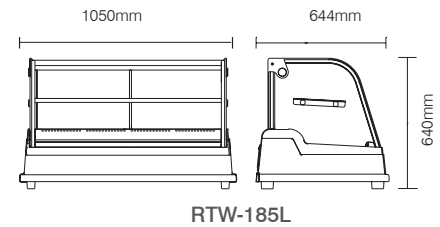


Model	RTW-185L
Capacity-Gross	185L
Temperature range	0-12℃ (32-53.6 °F)
Rated Input Power	278W / 226W / 230
Refrigerant	R134a / R600a / R290
Class mate	4
N.W.	62kg(136.7lbs)
G.W.	67kg(147.7lbs)
Overall Dimension	1050×644×640mm
Overall Dimension	41.3×25.4×25.2inch
Package Dimmension	1130×710×700mm
Package Dimmension	44.5×28.0×27.6inch
20' Container	48
40' Container	96
40' Container (high)	96
Color	silver-gray

COUNTERTOP DISPLAYS


RTW-130L-2/201L

Standard Features

Brilliant Internal LED illumination on top
Digital temperature controller and display
Adjustable chrome plated shelves
4 sides double glass
Sliding doors
Ventilated cooling system
Automatic defrost
Stainless steel
2 levels of the bracket to adjust the angle of shelf



RTW-130L-2 & RTW-201L

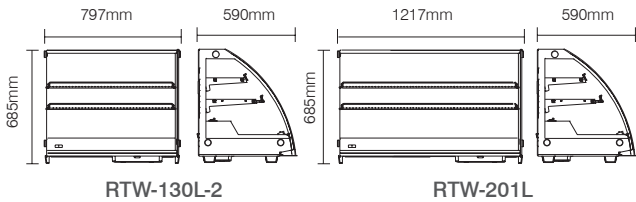

Model	RTW-130L-2	RTW-201L
Capacity-Gross	130L	201L
Temperature range	0-12℃ (32-53.6 °F)	0-12℃ (32-53.6 °F)
Rated Input Power	230W / 200W	375W / 290W / 400W
Refrigerant	R134a / R600a	R134a / R600a / R290
Class mate	4	4
N.W.	66kg(145.5lbs)	84.5kg(186.3bs)
G.W.	68kg(149.9lbs)	87kg(191.8lbs)
Overall Dimension	797×590×685mm	1217×590×685mm
Overall Dimension	31.4×23.2×27.0inch	47.9×23.2×27.0inch
Package Dimmension	873×642×735mm	1293×642×735mm
Package Dimmension	34.4×25.3×28.9inch	50.9×25.3×28.9inch
20' Container	60	36
40' Container	132	81
40' Container (high)	132	81
Color	Black	Black

COUNTER TOP REFRIGERATORS

COUNTERTOP DISPLAYS



RTW-129C

RTW-129C

Standard Features

- Brilliant Internal LED illumination on top
- Digital temperature controller and display
- Glass shelves
- Double tempered glass
- Sliding doors
- Air duct outside the glass to remove condensation water

RTW-129C-2


Standard Features

- Brilliant Internal LED illumination on top
- Digital temperature controller and display
- Glass shelves
- Double tempered glass
- Back hinge door
- Air duct outside the glass to remove condensation water

RTW-190L

Standard Features

- Standard Features
- Built-in LED lighting
- Intelligent temperature controller/ real time temperature
- Digital display
- Adjustable glass shelves
- Safety double glass
- Back door
- Stainless steel
- Air duct outside, remove condensation on the glass easily

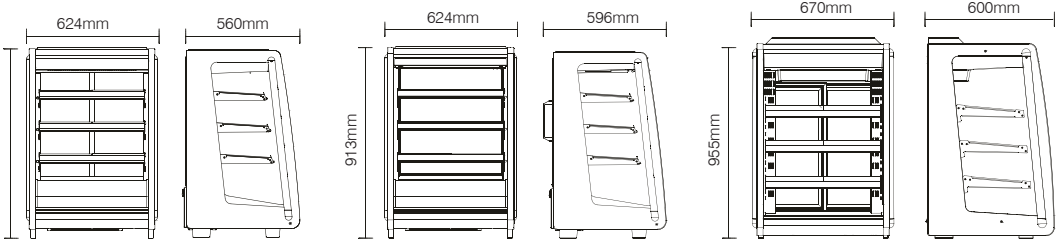

RTW-129C

RTW-129C-2

RTW-190L

Model	RTW-129C	RTW-129C-2	RTW-190L
Capacity-Gross	129L	129L	190L
Temperature range	2-12°C (35.6-53.6 °F)	2-12°C (35.6-53.6 °F)	2-8°C (35.6-46.4 °F)
Rated Input Power	189W	270W	260W
Refrigerant	R290	R290	R600a
Class mate	4	4	4
N.W.	58.5kg(129.0lbs)	63kg(138.9lbs)	73kg(160.9lbs)
G.W.	61kg(134.5lbs)	65kg(143.3lbs)	104kg(229.3lbs)
Overall Dimension	624×560×914mm	624×596×913mm	670×600×955mm
Overall Dimension	24.6×22.0×36.0inch	24.6×23.5×35.9inch	26.4×23.6×37.6inch
Package Dimmension	700×630×953mm	700×666×995mm	750×730×1160mm
Package Dimmension	27.6×24.8×37.5inch	27.6×26.2×39.2inch	29.5×28.7×45.7inch
20" Container	54	48	48
40" Container	108	102	96
40" Container (high)	108	102	96

MILK REFRIGERATION


WITH CUP WARMER



Top cup warmer



Reserved hole for straw of milk shake machine

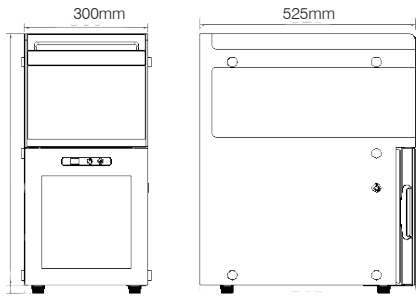

RTRW-15L



RTRW-15L

RTRW-15L

Standard Features

- Digital temperature controller
- Touch panel operation and digital display
- Milk Refrigeration with top cup warmer
- Independent selection of internal light control
- Hidden handle glass door
- Reserved hole for straw of milk shake machine
- Tempered glass and stainless steel
- Direct cooling system

Model	RTRW-15L
Capacity-Gross	15L
Heating range	50-65°C (112-149 °F)
Temperature range	1-6°C (33.8-42.8 °F)
Rated Input Power of heating	200W
Rated Input Power of cooling	150W
Refrigerant	R134a/R600a
Class mate	4
N.W.	35kg(77.2lbs)
G.W.	37kg(81.6lbs)
Overall Dimension	300×525×640mm
Overall Dimension	11.8×20.7×25.2inch
Package Dimmension	605×380×701mm
Package Dimmension	23.8×15×25.2inch
20" Container	54
40" Container	114
40" Container (high)	114

STANDING REFRIGERATORS

STANDING DISPLAY REFRIGERATOR



Standard Features

- LED light at 2 front sides
- Digital temperature controller and display
- Adjustable PVC coated shelves
- Front curved glass door
- 4 sides double glass
- Castors with 2 brakes
- Ventilated cooling system
- Automatic defrost
- Air duct outside the glass to remove condensation water

Options


- Adjustable chrome plated shelves
- Top light box
- LED light at 4 sides



Low energy consumption

Simple construction and high security

Air duct outside the glass to remove condensation water

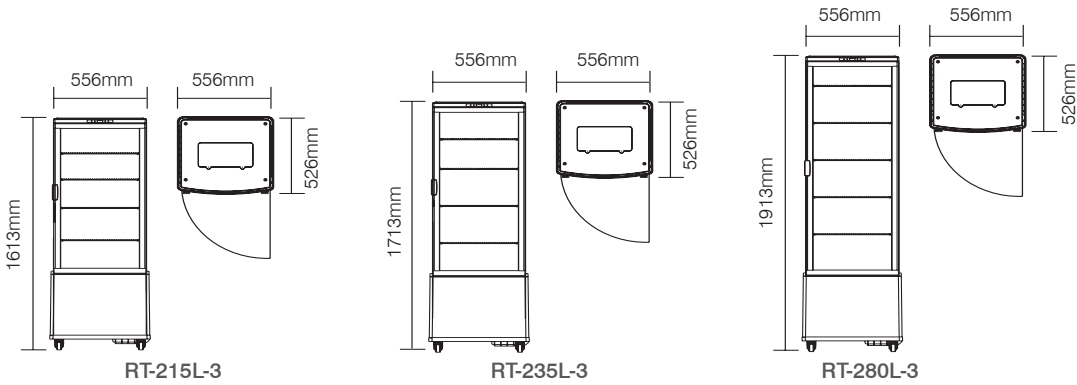


Model	RT-215L-3	RT-235L-3	RT-280L-3
Capacity-Gross	215L	235L	280L
Temperature range	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)
Rated Input Power	400W / 380W	400W / 380W	400W / 380W
Refrigerant	R134a / R290	R134a / R290	R134a / R290
Class mate	4	4	4
N.W.	73.5kg(162.0lbs)	76.5kg(168.7lbs)	89.5kg(197.3lbs)
G.W.	78kg(172.0lbs)	81kg(178.6lbs)	95kg(209.4lbs)
Overall Dimension	556×526×1613mm	556×526×1713mm	556×526×1913mm
Overall Dimension	21.9×20.7×63.5inch	21.9×20.7×67.4inch	21.9×20.7×75.3inch
Package Dimmension	615×575×1640mm	615×575×1740mm	615×575×1940mm
Package Dimmension	24.2×22.6×64.6inch	24.2×22.6×68.5inch	24.2×22.6×76.4inch
20' Container	36	36	36
40' Container	76	76	76
40' Container (high)	76	76	76
Colour	White/Black/Silver	White/Black/Silver	White/Black/Silver

STANDING REFRIGERATORS

STANDING DISPLAY REFRIGERATOR



Lookable



LED lights



Digital
Controller



RT-235L




RT-235L-2

Standard Features

- LED light at 2 front sides
- Digital temperature controller and display
- Adjustable PVC coated shelves
- Front curved glass door
- 4 sides double glass
- Base Feet
- Ventilated cooling system
- Automatic defrost

Options

- Top light box
- Lockable Door
- Adjustable chrome plated shelves
- LED light at 4 sides
- 4 Castors, 2 with brakes

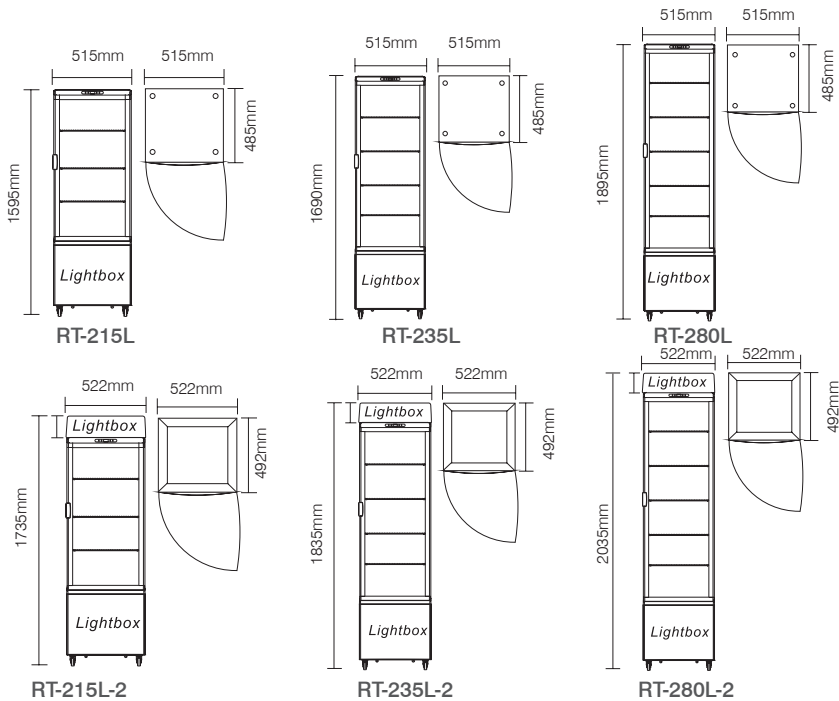

Model	RT-215L	RT-235L	RT-280L
Capacity-Gross	215L	235L	270L
Temperature range	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)
Rated Input Power	250W / 380W	250W / 380W	320W / 380W
Refrigerant	R134a / R290	R134a / R290	R134a / R290
Class mate	4	4	4
N.W.	73kg(160.9lbs)	80.5kg(170.5lbs)	89kg(196.2lbs)
G.W.	77kg(169.8lbs)	85.5kg(188.5lbs)	94.1kg(207.5lbs)
Overall Dimension	515×485×1590mm	515×485×1690mm	515×485×1895mm
Overall Dimension	20.3×19.1×62.6inch	20.3×19.1×66.5inch	20.3×19.1×74.6inch
Package Dimmension	590×550×1650mm	590×550×1760mm	590×550×1950mm
Package Dimmension	23.2×21.7×65.0inch	23.2×21.7×68.9inch	23.2×21.7×76.8inch
20' Container	36	36	36
40' Container	80	80	80
40' Container (high)	80	80	80
Colour	White/Black/Silver	White/Black/Silver	White/Black/Silver

Model	RT-215L-2	RT-235L-2	RT-280L-2
Capacity-Gross	215L	235L	270L
Temperature range	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)
Rated Input Power	250W / 380W	250W / 380W	320W / 380W
Refrigerant	R134a / R290	R134a / R290	R134a / R290
Class mate	4	4	4
N.W.	75kg(165.3lbs)	82.5kg(181.9lbs)	90.5kg(199.5lbs)
G.W.	79kg(174.2lbs)	88kg(194lbs)	96kg(211.6lbs)
Overall Dimension	515×485×1735mm	515×485×1835mm	515×485×2035mm
Overall Dimension	20.3×19.1×68.3inch	20.3×19.1×72.2inch	20.3×19.1×80.1inch
Package Dimmension	590×550×1800mm	590×550×1900mm	590×550×2100mm
Package Dimmension	23.2×21.7×70.9inch	23.2×21.7×74.8inch	23.2×21.7×82.7inch
20' Container	36	36	36
40' Container	80	80	80
40' Container (high)	80	80	80
Colour	White/Black/Silver	White/Black/Silver	White/Black/Silver

STANDING REFRIGERATORS

STANDING DISPLAY REFRIGERATOR



ODIS

Standard Features


- Brilliant Internal LED illumination on sides
- Digital temperature controller and display
- Adjustable PVC coated shelves
- Front flat glass door
- 4 sides double glass
- 4 Castors, 2 with brakes
- Ventilated cooling system
- Automatic defrost

Options

- Adjustable chrome plated shelves
- Lockable door



RT-500L

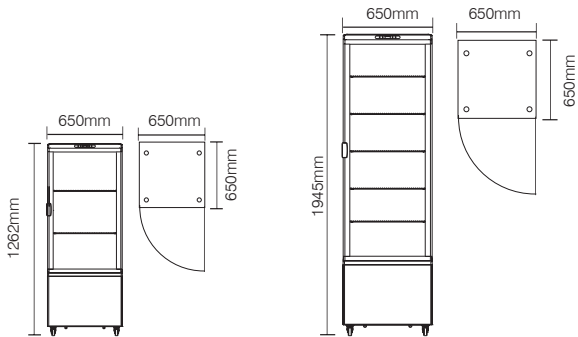

Model	RT-208L	RT-500L
Capacity-Gross	208L	500L
Temperature range	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)
Rated Input Power	420W	680W / 460W
Refrigerant	R134a / R290	R404a / R290
Class mate	4	4
N.W.	90kg(198.4bs)	135kg(297.6lbs)
G.W.	99kg(218.3bs)	144kg(317.5lbs)
Overall Dimension	650×650×1262mm	650×650×1945mm
Overall Dimension	25.6×25.6×49.7inch	25.6×25.6×76.6inch
Package Dimmension	735×735×1417mm	735×735×2100mm
Package Dimmension	28.9×28.9×55.8inch	28.9×28.9×82.7inch
20' Container	21	21
40' Container	45	45
40' Container (high)	45	45



STANDING REFRIGERATORS

STANDING DISPLAY REFRIGERATOR



RT-400L-2

Compressor on top to avoid any damages caused by food residue. Cold and hot air exchange on top, so no need for extra space around the unit.

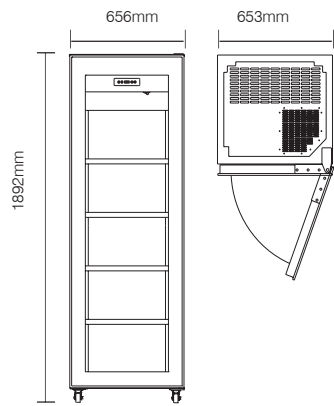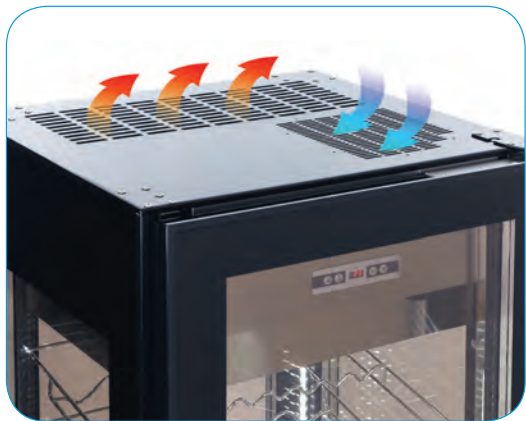

RT-400L-2

- RT-400L-2**
Standard Features
Brilliant Internal LED illumination on sides
Digital temperature controller and display
Cooling system on top
4 adjustable chrome plated shelves
Front flat glass door
4 sides triple glass
4 Castors, 2 with brakes
Ventilated cooling system
Automatic defrost

Model	RT-400L-2
Capacity-Gross	400L
Temperature range	2-8°C (35.6-46.4 °F)
Rated Input Power	500W
Refrigerant	R290
Class mate	4
N.W.	181kg(399.0lbs)
G.W.	204kg(449.7lbs)
Overall Dimension	656×653×1892mm
Overall Dimension	25.8×25.7×74.5inch
Package Dimmension	740×740×2050mm
Package Dimmension	29.1×29.1×80.7inch
20' Container	21
40' Container	45
40' Container (high)	45

STANDING REFRIGERATORS

STANDING DISPLAY REFRIGERATOR




RT-400L



- Standard Features**
- Brilliant Internal LED illumination on sides
 - Digital temperature controller and display
 - Adjustable chrome plated shelves
 - Front flat glass door
 - 4 sides triple glass
 - 4 Castors, 2 with brakes
 - On / Off Switch
 - Ventilated cooling system
 - Automatic defrost
 - Stainless Steel



RT-270L

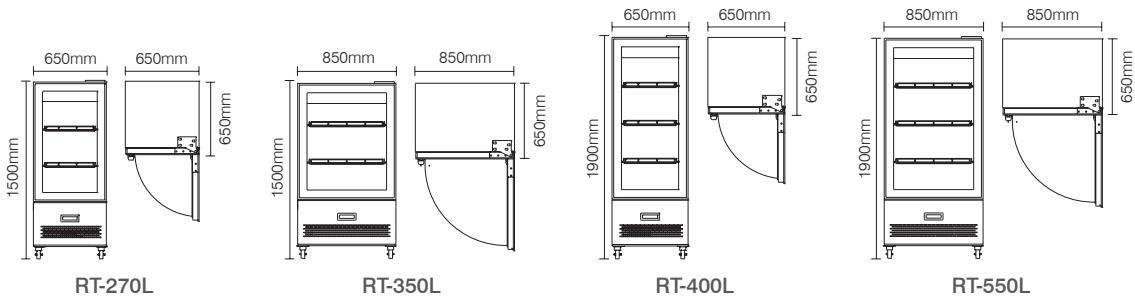

Model	RT-270L	RT-350L	RT-400L	RT-550L
Capacity-Gross	270L	350L	400L	550L
Temperature range	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)
Rated Input Power	420W / 475W	420W / 495W	420W / 495W	420W / 500W
Refrigerant	R134a / R290	R134a / R290	R134a / R290	R134a / R290
Class mate	4	4	4	4
N.W.	130kg(286.6lbs)	152kg(335.1lbs)	161kg(354.9lbs)	192kg(423.3lbs)
G.W.	147kg(324.1bs)	168kg(370.4lbs)	180kg(396.8lbs)	210kg(463.0bs)
Overall Dimension	650×650×1500mm	850×650×1500mm	650×650×1908mm	850×650×1908mm
Overall Dimension	25.6×25.6×59.1inch	33.5×25.6×59.1inch	25.6×25.6×75.1inch	33.5×25.6×75.1inch
Package Dimmension	740×740×1650mm	940×740×1650mm	740×740×2050mm	940×740×2050mm
Package Dimmension	29.1×29.1×65.0inch	37×29.1×65.0inch	29.1×29.1×80.7inch	37×29.1×80.7inch
20' Container	21	18	21	18
40' Container	45	36	45	36
40' Container (high)	45	36	45	36

STANDING REFRIGERATORS


STANDING DISPLAY REFRIGERATOR



RTJ-285L

ODIS


- Standard Features**
- Digital temperature control and display
 - 4 glass drawers
 - Hidden LED backlight board
 - 3D Rotary spotlight
 - Integral stainless steel body
 - Ventilated cooling system without frost
 - Louvered air duct design
 - 5 Castors, 2 with brakes

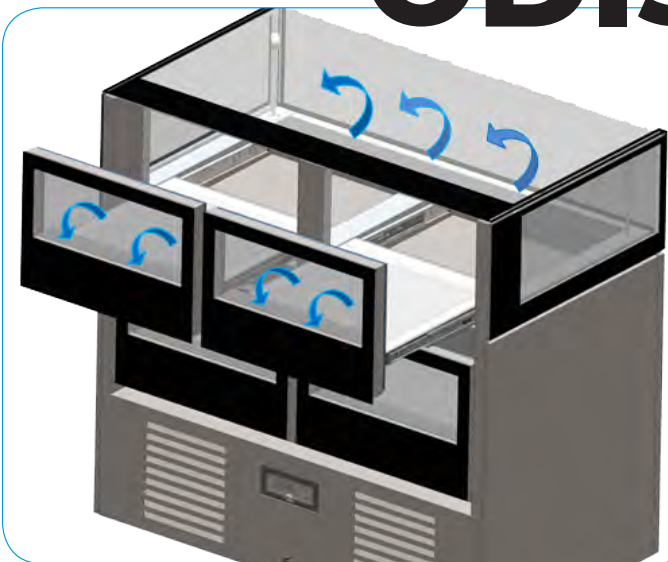

Forced air circulation diagram of showcase
Visible and automatic defogging glass on top
Glasses spelled at a 45 ° angle,
no superimposed shadow at that angle.




45 ° Angle glass
(with heating film)



Glass drawers (The drawer's laminate is
provided with luminous lighting.)



3D Rotary spotlight

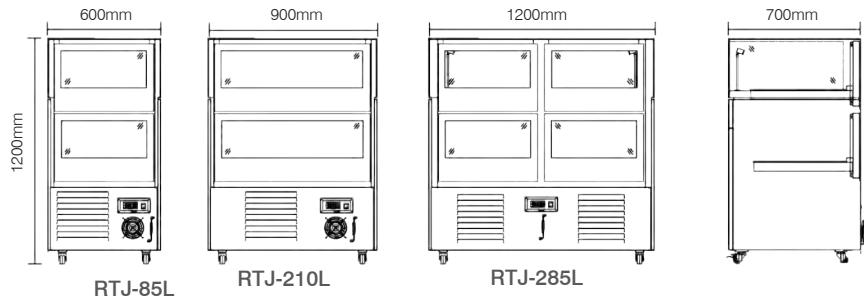

Model	RTJ-85L	RTJ-210L	RTJ-285L
Capacity-Gross	85L	210L	285L
Temperature range	2-8°C (35.6-46.4 °F)	2-8°C (35.6-46.4 °F)	2-8°C (35.6-46.4 °F)
Rated Input Power	660W	810W	900W
Refrigerant	R290	R290	R290
Class mate	4	4	4
N.W.	135kg(297.6lbs)	165kg(363.8lbs)	207kg(456.4lbs)
G.W.	170kg(374.8lbs)	200kg(440.9lbs)	240kg(529.1lbs)
Overall Dimension	600×700×1200mm	900×700×1200mm	1200×700×1200mm
Overall Dimension	23.6×27.6×47.2inch	35.4×27.6×47.2inch	47.2×27.6×47.2inch
Package Dimmension	670×770×1340mm	970×770×1340mm	1300×795×1370mm
Package Dimmension	26.4×30.3×52.8inch	38.2×30.3×52.8inch	51.2×31.3×53.9inch
20' Container	24	14	11
40' Container	51	28	23
40' Container (high)	51	28	23


BAKERY REFRIGERATED SHOWCASE
STANDING DISPLAY REFRIGERATOR

ODIS



ARC-460Y/660Y/860Y
Standard Features
Front glass can be lifted
Automatic defrost
Digital controller
LED under each shelf
4 casters, 2 with brakes

ARC-460Y

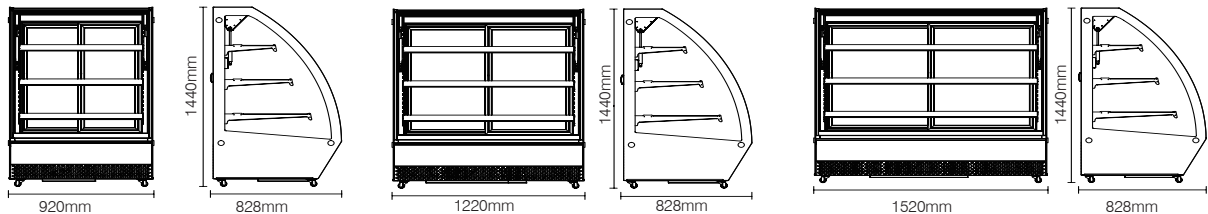

ARC-460Y

ARC-660Y

ARC-860Y

Model	ARC-460Y	ARC-660Y	ARC-860Y
Capacity-Gross	420L	570L	710L
Temperature range	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)
Rated Input Power	415W	650W	670W
Refrigerant	R290	R290	R290
Class mate	4	4	4
N.W.	166kg(366.0lbs)	206kg(454.2lbs)	235kg(518.1lbs)
G.W.	200kg(440.9lbs)	245kg(540.1lbs)	280kg(617.3lbs)
Overall Dimension	920×828×1440mm	1220×828×1440mm	1520×828×1440mm
Overall Dimension	36.2×32.6×56.7inch	48.0×32.6×56.7inch	59.8×32.6×56.7inch
Package Dimmension	978×884×1515mm	1278×884×1515mm	1578×884×1515mm
Package Dimmension	38.5×34.8×59.6inch	50.3×34.8×59.6inch	62.1×34.8×59.6inch
20' Container	12	10	10
40' Container	24	20	20
40' Container (high)	24	20	20



LED lights




Digital
Controller



Castors



RT-765L

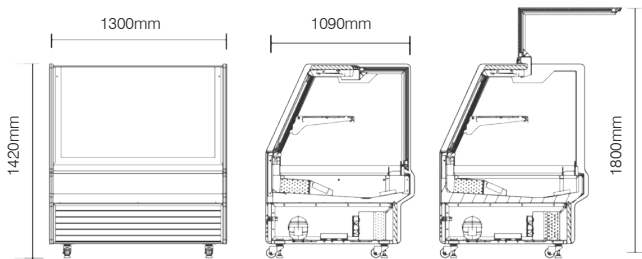

RT-765L

Standard Features
Internal LED illumination
Digital temperature control and display
Adjustable insulating glass door at front
Sliding insulating glass door at back
Ventilating cooling system without frost
Adjustable shelf
Condensate water evaporates automatically
Mirror stainless steel at 2 inner sides

Model	RT-765L
Capacity-Gross	765L
Temperature range	2-8°C (35.6-46.4 °F)
Rated Input Power	720W
Refrigerant	R290
Class mate	3
N.W.	252kg(555.6lbs)
G.W.	337kg(743.0lbs)
Overall Dimension	1300×1090×1420mm
Overall Dimension	51.2×42.9×55.9inch
Package Dimmension	1410×1195×1633mm
Package Dimmension	55.5×47.0×64.3inch
20' Container	4
40' Container	9
40' Container (high)	9

BAKERY REFRIGERATED SHOWCASE
STANDING DISPLAY REFRIGERATOR



LED lights



Digital
Controller




Castors



ODIS

Standard Features

- Brilliant Internal LED lighting each shelf
- 3 adjustable glass shelves
- Digital temperature control and display
- Double tempered glass
- 4 Castors with 2 brakes
- Ventilated cooling system
- Automatic Defrost

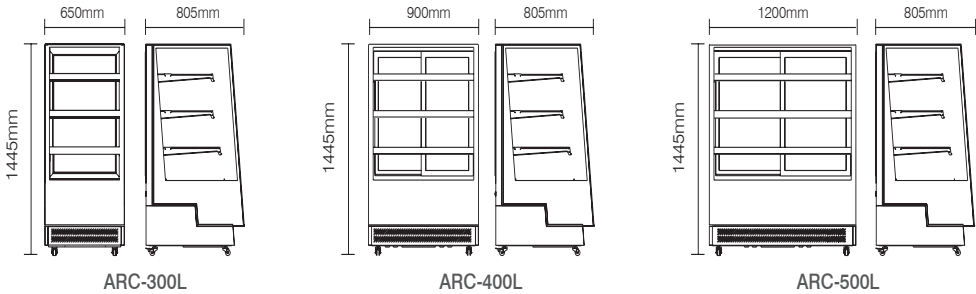

Model	ARC-300L	ARC-400L	ARC-500L
Capacity-Gross	350L	500L	650L
Temperature range	2-8°C (35.6-46.4 °F)	2-8°C (35.6-46.4 °F)	2-8°C (35.6-46.4 °F)
Rated Input Power	460W / 480W	480W / 490W	480W / 490W
Refrigerant	R134a / R290	R134a / R290	R134a / R290
Class mate	4	4	4
N.W.	135kg(297.6lbs)	160kg(352.7lbs)	190kg(418.9lbs)
G.W.	158kg(348.3lbs)	180kg(396.8lbs)	220kg(485.0lbs)
Overall Dimension	650×805×1445mm	900×805×1445mm	1200×805×1445mm
Overall Dimension	25.6×31.7×56.9inch	35.4×31.7×56.9inch	47.2×31.7×56.9inch
Package Dimmension	750×894×1660mm	1000×894×1660mm	1300×894×1660mm
Package Dimmension	29.5×35.2×65.4inch	39.4×35.2×65.4inch	51.2×35.2×65.4inch
20' Container	18	12	10
40' Container	38	24	21
40' Container (high)	38	24	21
Colour	Black/Silver	Black/Silver	Black/Silver

BAKERY REFRIGERATED SHOWCASE
STANDING DISPLAY REFRIGERATOR



LED lights



Digital
Controller





Castors

Standard Features


- Brilliant Internal LED lighting each shelf and bottom
- 2 adjustable glass shelves
- Digital temperature control and display
- Double tempered glass
- 4 Castors with 2 brakes
- Ventilated cooling system
- Automatic Defrost
- Front curved glass

Options


- Air duct outside the glass to remove condensation water

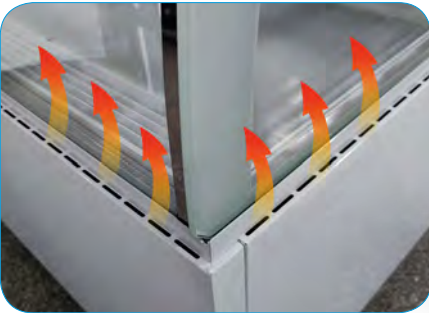


ARC-270Y



ARC-370Y



ARC-470Y



ARC-570Y

Model	ARC-270Y	ARC-370Y	ARC-470Y	ARC-570Y
Capacity-Gross	295L	400L	500L	600L
Temperature range	2-8°C (35.6-46.4 °F)	2-8°C (35.6-46.4 °F)	2-8°C (35.6-46.4 °F)	2-8°C (35.6-46.4 °F)
Rated Input Power	475W / 480W	480W / 490W	500W / 490W	1050W / 500W
Refrigerant	R134a / R290	R134a / R290	R134a / R290	R404a / R290
Class mate	4	4	4	4
N.W.	135kg(297.6lbs)	155kg(341.7lbs)	182kg(401.2lbs)	220kg(485.0lbs)
G.W.	154kg(339.5lbs)	188kg(414.5lbs)	235kg(518lbs)	260kg(573.2lbs)
Overall Dimension	915×675×1220mm	1215×675×1220mm	1515×675×1220mm	1815×675×1220mm
Overall Dimension	36.0×26.6×48.0inch	47.8×26.6×48.0inch	59.6×26.6×48.0inch	71.5×26.6×48.0inch
Package Dimmension	1025×765×1280mm	1325×765×1280mm	1600×743×1270mm	1900×743×1270mm
Package Dimmension	40.4×30.1×50.4inch	52.2×30.1×50.4inch	63.0×29.3×50.0inch	74.8×29.3×50.0inch
20' Container	17	12	11	9
40' Container	34	25	23	18
40' Container (high)	68	50	46	36

BAKERY REFRIGERATED SHOWCASE
STANDING DISPLAY REFRIGERATOR








Standard Features

- Brilliant Internal LED lighting each shelf and bottom
- 2 adjustable glass shelves
- Digital temperature control and display
- Double tempered glass
- 4 Castors with 2 brakes
- Ventilated cooling system
- Automatic Defrost
- Front curved glass


Options

- Air duct outside the glass to remove condensation water

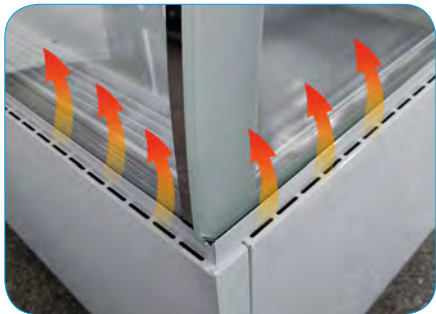

Model	ARC-270Y-1	ARC-370Y-1	ARC-470Y-1	ARC-570Y-1
Capacity-Gross	295L	400L	500L	600L
Temperature range	2-8°C (35.6-46.4 °F)	2-8°C (35.6-46.4 °F)	2-8°C (35.6-46.4 °F)	2-8°C (35.6-46.4 °F)
Rated Input Power	475W / 480W	480W / 490W	500W / 490W	1050W / 500W
Refrigerant	R134a / R290	R134a / R290	R134a / R290	R404a / R290
Class mate	4	4	4	4
N.W.	135kg(297.6lbs)	155kg(341.7lbs)	182kg(401.2lbs)	220kg(485.0lbs)
G.W.	154kg(339.5lbs)	188kg(414.5lbs)	235kg(518lbs)	260kg(573.2lbs)
Overall Dimension	915×675×1220mm	1215×675×1220mm	1515×675×1220mm	1815×675×1220mm
Overall Dimension	36.0×26.6×48.0inch	47.8×26.6×48.0inch	59.6×26.6×48.0inch	71.5×26.6×48.0inch
Package Dimmension	1025×765×1280mm	1325×765×1280mm	1600×743×1270mm	1900×743×1270mm
Package Dimmension	40.4×30.1×50.4inch	52.2×30.1×50.4inch	63.0×29.3×50.0inch	74.8×29.3×50.0inch
20' Container	17	12	11	9
40' Container	34	25	23	18
40' Container (high)	68	50	46	36

BAKERY REFRIGERATED SHOWCASE
STANDING DISPLAY REFRIGERATOR


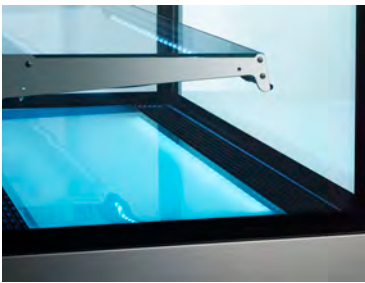


Standard Features

- Brilliant Internal LED lighting each shelf and bottom
- 2 adjustable glass shelves
- Digital temperature control and display
- Double tempered glass
- 4 Castors with 2 brakes
- Ventilated cooling system
- Automatic Defrost
- Front flat glass

Options

- Air duct outside the glass to remove condensation water

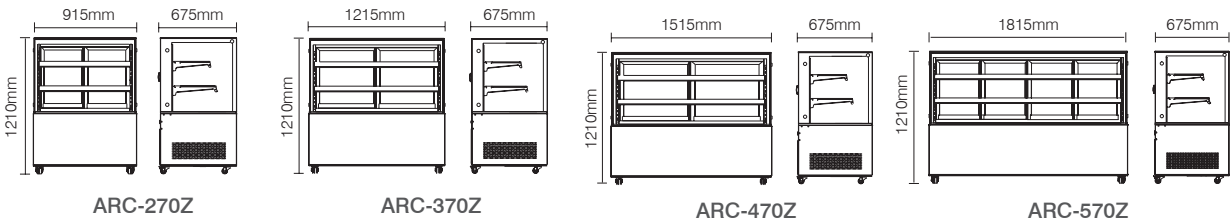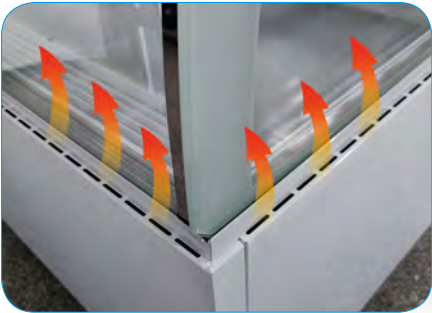

Model	ARC-270Z	ARC-370Z	ARC-470Z	ARC-570Z
Capacity-Gross	300L	410L	510L	610L
Temperature range	2-8°C (35.6-46.4 °F)	2-8°C (35.6-46.4 °F)	2-8°C (35.6-46.4 °F)	2-8°C (35.6-46.4 °F)
Rated Input Power	475W / 480W	480W / 490W	500W / 490W	1050W / 500W
Refrigerant	R134a / R290	R134a / R290	R134a / R290	R404a / R290
Class mate	4	4	4	4
N.W.	135kg(297.6lbs)	155kg(341.7lbs)	182kg(401.2lbs)	225kg(496.0lbs)
G.W.	154kg(339.5lbs)	188kg(414.5lbs)	235kg(518lbs)	265kg(584.2lbs)
Overall Dimension	915×675×1210mm	1215×675×1210mm	1515×675×1210mm	1815×675×1210mm
Overall Dimension	36.0×26.6×47.6inch	47.8×26.6×47.6inch	59.6×26.6×47.6inch	71.5×26.6×47.6inch
Package Dimmension	1025×765×1280mm	1325×765×1280mm	1600×743×1270mm	1900×743×1270mm
Package Dimmension	40.4×30.1×50.4inch	52.2×30.1×50.4inch	63.0×29.3×50.0inch	74.8×29.3×50.0inch
20' Container	17	12	11	9
40' Container	34	25	23	18
40' Container (high)	68	50	46	36

BAKERY REFRIGERATED SHOWCASE

STANDING DISPLAY REFRIGERATOR





ODIS

Standard Features

- Brilliant Internal LED lighting each shelf and bottom
- 3 adjustable glass shelves
- Digital temperature control and display
- Double tempered glass
- Castors with 2 brakes
- Ventilated cooling system
- Automatic Defrost
- Front curved glass

Options

- Air duct outside the glass to remove condensation water

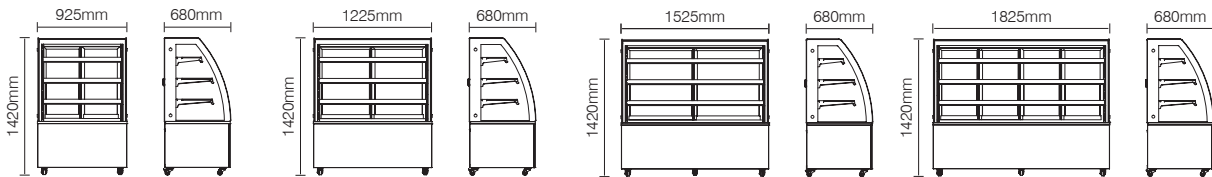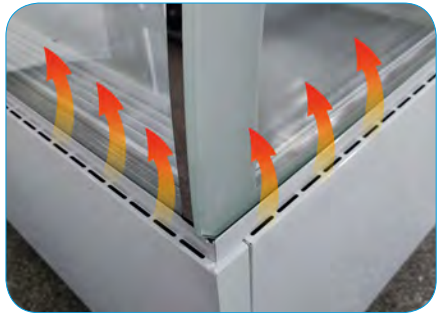

ARC-271Y

ARC-371Y

ARC-471Y

ARC-571Y

Model	ARC-271Y	ARC-371Y	ARC-471Y	ARC-571Y
Capacity-Gross	310L	420L	535L	650L
Temperature range	2-8°C (35.6-46.4 °F)	2-8°C (35.6-46.4 °F)	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)
Rated Input Power	720W / 525W	730W / 540W	560W / 500W	810W / 600W
Refrigerant	R404a / R290	R404a / R290	R404a / R290	R404a / R290
Class mate	4	4	4	4
N.W.	146kg(321.9lbs)	177kg(390.2lbs)	210kg(463.0lbs)	235kg(518.1lbs)
G.W.	175kg(385.8lbs)	212kg(467.4lbs)	246kg(542.3lbs)	280kg(617.3lbs)
Overall Dimension	925×680×1420mm	1225×680×1420mm	1525×680×1420mm	1825×680×1420mm
Overall Dimension	36.4×26.8×55.9inch	48.2×26.8×55.9inch	60.0×26.8×55.9inch	71.6×26.8×55.9inch
Package Dimmension	1050×790×1590mm	1350×790×1590mm	1600×743×1470mm	1900×743×1470mm
Package Dimmension	41.3×31.1×62.6inch	53.1×31.1×62.6inch	63.0×29.3×57.9inch	74.8×29.3×57.9inch
20' Container	17	12	10	9
40' Container	34	25	21	18
40' Container (high)	34	25	21	18

BAKERY REFRIGERATED SHOWCASE
STANDING DISPLAY REFRIGERATOR





Standard Features


- Brilliant Internal LED lighting each shelf and bottom
- 3 adjustable glass shelves
- Digital temperature control and display
- Double tempered glass
- Castors with 2 brakes
- Ventilated cooling system
- Automatic Defrost
- Front flat glass

Options


- Air duct outside the glass to remove condensation water

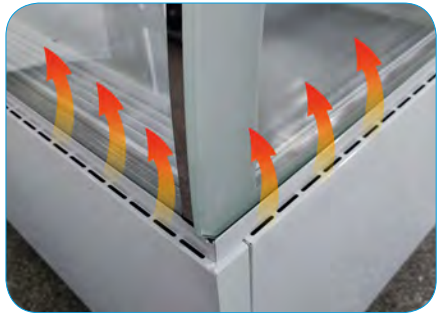


ARC-271Z



ARC-371Z



ARC-471Z



ARC-571Z

Model	ARC-271Z	ARC-371Z	ARC-471Z	ARC-571Z
Capacity-Gross	390L	530L	670L	810L
Temperature range	2-8°C (35.6-46.4 °F)	2-8°C (35.6-46.4 °F)	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)
Rated Input Power	720W / 525W	730W / 540W	560W / 500W	810W / 600W
Refrigerant	R404a / R290	R404a / R290	R404a / R290	R404a / R290
Class mate	4	4	4	4
N.W.	162kg(357.1lbs)	195kg(429.9lbs)	229kg(504.9lbs)	245kg(540.1lbs)
G.W.	190kg(418.9lbs)	229kg(504.9lbs)	252kg(555.6lbs)	290kg(639.3lbs)
Overall Dimension	925×680×1410mm	1225×680×1410mm	1525×680×1410mm	1825×680×1410mm
Overall Dimension	36.4×26.8×55.5inch	48.2×26.8×55.5inch	60.0×26.8×55.5inch	71.6×26.8×55.5inch
Package Dimmension	1050×790×1590mm	1350×790×1590mm	1600×743×1470mm	1900×743×1470mm
Package Dimmension	41.3×31.1×62.6inch	53.1×31.1×62.6inch	63.0×29.3×57.9inch	74.8×29.3×57.9inch
20' Container	17	12	10	9
40' Container	34	25	21	18
40' Container (high)	34	25	21	18

BAKERY REFRIGERATED SHOWCASE
CAKE DISPLAY

ODIS



ARC-400R

ARC-100R/400R
Standard Features


- Brilliant Internal LED lighting at 2 sides
- adjustable glass shelves
- Shelf rotatable manually
- Digital temperature control and display
- Double tempered glass
- Ventilated cooling system
- Automatic Defrost
- Automatic closing door
- Stainless steel body base
- ARC-400R
- 5 Castors with front 2 brakes




LED lights



Digital
Controller



ARC-400R



ARC-100R



ARC-100R


Model	ARC-100R	ARC-400R
Capacity-Gross	100L	360L
Temperature range	2-8°C (35.6-46.4 °F)	2-8°C (35.6-46.4 °F)
Rated Input Power	230W / 210W	480W / 460W
Refrigerant	R134a / R600a	R134a / R290
Class mate	4 / 6	4
N.W.	50kg(110.2lbs)	127kg(280.0lbs)
G.W.	55kg(121.3lbs)	140kg(308.6lbs)
Overall Dimension	480×480×1030mm	680×680×1750mm
Overall Dimension	18.9×18.9×40.6inch	26.8×26.8×68.9inch
Package Dimmension	565×565×1100mm	750×750×1930mm
Package Dimmension	22.2×22.2×43.3inch	29.5×29.5×76.0inch
20' Container	80	21
40' Container	160	45
40' Container (high)	160	45

BAKERY REFRIGERATED SHOWCASE

CAKE DISPLAY

Standard Features

- Brilliant Internal LED illumination on 2 sides
- Digital temperature controller and display
- Rotational chrome plated shelves
- Round double glass
- Ventilated cooling system
- Automatic defrost



LED lights



Digital Controller




RTC-72L




RTC-73L



Decrease condensation
for RTC-73L



RTC-72L



RTC-73L

Model	RTC-72L	RTC-73L
Capacity-Gross	72L	73L
Temperature range	0-10°C (32-50 °F)	2-12°C (35.6-53.6 °F)
Rated Input Power	190W / 170W / 230W	209W / 190W / 230W
Refrigerant	R134a / R600a / R290	R134a / R600a / R290
Class mate	4	4
N.W.	38.5kg(84.9lbs)	45kg(99.2lbs)
G.W.	41kg(90.4lbs)	47.5kg(104.7lbs)
Overall Dimension	450×450×983mm	504×504×1060mm
Overall Dimension	17.7×17.7×38.7inch	19.8×19.8×41.7inch
Package Dimmension	500×500×1040mm	525×525×1110mm
Package Dimmension	19.7×19.7×40.9inch	20.7×20.7×43.7inch
20' Container	88	80
40' Container	184	168
40' Container (high)	184	168


OPEN REFRIGERATED SHOWCASE

OPEN DISPLAYS

RTS-360L

Standard Features

- Brilliant Internal LED lighting on top and each shelf
- Digital temperature controller and display
- 4 Castors with 2 brakes
- Side single tempered glass
- With night curtain
- Ventilated cooling system
- Automatic defrost
- Adjustable shelves
- Condensator at back side, free maintenance
- Condensation water evaporated automatically
- Light box on top



LED lights



Digital Controller



Castors



RTS-360L

ODIS

RTS-390L

Standard Features

- Brilliant Internal LED lighting at 2 front sides
- Digital temperature controller and display
- 4 Castors with 2 brakes
- Double tempered glass
- With night curtain
- Ventilated cooling system
- Automatic defrost
- Adjustable shelves
- Condensation water evaporated automatically
- Condensator at back side, free maintenance



RTS-390L

RTS-390LS/490LS

Standard Features


- Brilliant Internal LED lighting at 2 front sides
- Digital temperature controller and display
- 4 Castors with 2 brakes
- Double tempered glass
- With night curtain
- Ventilated cooling system
- Automatic defrost
- Adjustable shelves
- Stainless steel
- Condensation water evaporated automatically
- Condensator at back side, free maintenance

Options

Sliding doors



RTS-390LS & RTS-490LS

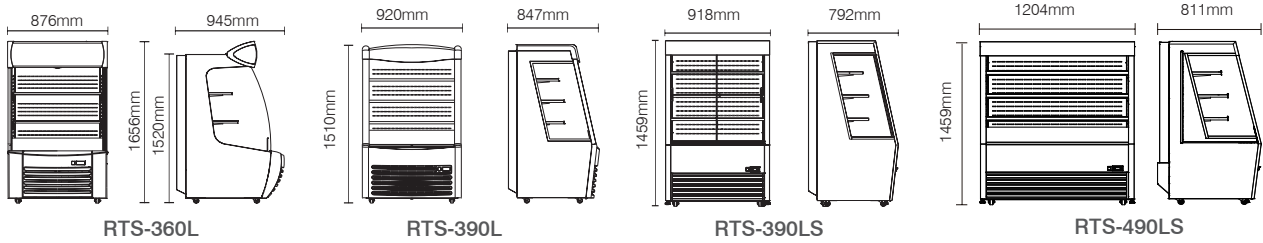

Model	RTS-360L	RTS-390L	RTS-390LS	RTS-490LS
Capacity-Gross	360L	320L	320L	426L
Temperature range	2-10°C (35.6-50 °F)	2-10°C (35.6-50 °F)	2-10°C (35.6-50 °F)	2-10°C (35.6-50 °F)
Rated Input Power	1400W/1300W	1400W / 1300W	1400W / 1300W	1200W
Refrigerant	R404a / R290	R404a / R290	R404a / R290	R404a / R290
Class mate	6	6	6	3
N.W.	125kg(275.6lbs)	123kg(271.2lbs)	130.5kg(287.7lbs)	168kg(370.4lbs)
G.W.	145kg(319.7lbs)	143kg(315.3lbs)	153kg(337.3lbs)	184kg(405.7lbs)
Overall Dimension	876×945×1656mm	920×847×1510mm	918×792×1459mm	1204×811×1459mm
Overall Dimension	34.5×37.2×65.2inch	36.2×33.3×59.4inch	36.1×31.2×57.4inch	47.4×31.9×57.4inch
Package Dimmension	1020×940×1690mm	990×920×1670mm	990×880×1610mm	1270×880×1610mm
Package Dimmension	40.2×37.0×66.5inch	39.0×36.2×65.7inch	39.0×34.6×63.4inch	50.0×34.6×63.4inch
20' Container	12	12	12	12
40' Container	24	24	26	22
40' Container (high)	24	24	26	22


OPEN REFRIGERATED SHOWCASE

OPEN DISPLAYS

RTS-230L / 380L

Standard Features

- Brilliant Internal LED lighting on top and bottom
- Digital temperature controller and display
- 4 Castors with 2 brakes
- Double tempered glass
- With night curtain
- Ventilated cooling system
- Automatic defrost
- Filter mesh in front of the base
- Adjustable shelves
- Condensation water evaporated automatically

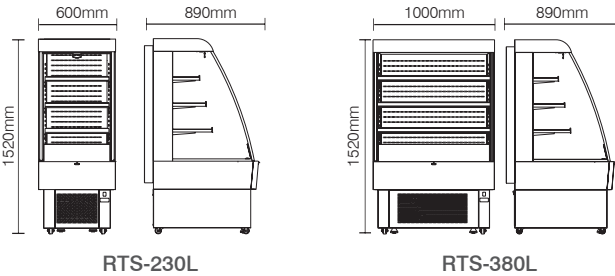

RTS-230L & RTS-380L

Model	RTS-230L	RTS-380L
Capacity-Gross	230L	380L
Temperature range	2-10°C (35.6-50 °F)	2-10°C (35.6-50 °F)
Rated Input Power	1340W / 1300W	1340W / 1300W
Refrigerant	R404a / R290	R404a / R290
Class mate	6	6
N.W.	82kg(180.8lbs)	107kg(235.9lbs)
G.W.	102kg(224.9lbs)	129kg(284.4lbs)
Overall Dimension	600×890×1520mm	1000×890×1520mm
Overall Dimension	23.6×35.0×59.8inch	39.4×35.0×59.8inch
Package Dimmension	660×950×1700mm	1060×950×1700mm
Package Dimmension	26.0×37.4×66.9inch	41.7×37.4×66.9inch
20' Container	20	12
40' Container	41	24
40' Container (high)	41	24

RTS-250L


Standard Features

- Brilliant Internal LED lighting on top and bottom
- Digital temperature controller and display
- 4 Castors with 2 brakes
- Double tempered glass
- With night curtain
- Ventilated cooling system
- Automatic defrost
- Adjustable shelves
- Condensation water evaporated automatically
- Condensator at back side, free maintenance

RTS-218L

Standard Features

- Brilliant Internal LED lighting on top and bottom
- Digital temperature controller and display
- 4 Castors with 2 brakes
- Double tempered glass
- With night curtain
- Ventilated cooling system
- Automatic defrost
- Filter mesh in front of the base
- Adjustable shelves
- Condensation water evaporated automatically

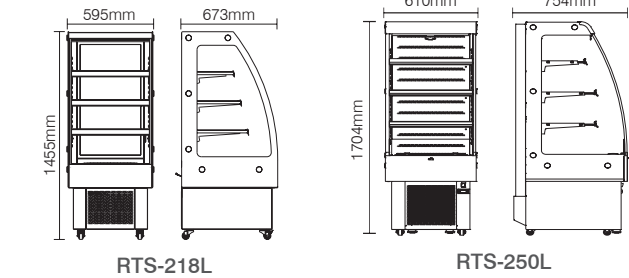

Model	RTS-218L	RTS-250L
Capacity-Gross	218L	250L
Temperature range	2-10°C (35.6-50 °F)	2-10°C (35.6-50 °F)
Rated Input Power	1260W / 1190W	1340W / 1300W
Refrigerant	R404a / R290	R404a / R290
Class mate	6	6
N.W.	88kg(194.0lbs)	100kg(220.1lbs)
G.W.	100kg(220.1lbs)	110kg(242.5lbs)
Overall Dimension	673×595×1455mm	610×754×1704mm
Overall Dimension	26.5×23.4×57.3inch	24.0×29.7×67.1inch
Package Dimmension	735×660×1620mm	691×830×1875mm
Package Dimmension	28.9×26.0×63.8inch	27.2×29.7×73.8inch
20' Container	24	21
40' Container	51	44
40' Container (high)	51	44



RTS-218L



RTS-250L


OPEN REFRIGERATED SHOWCASE

OPEN DISPLAYS



Standard Features

- Brilliant Internal LED illumination each shelf
- Digital temperature controller and display
- Stainless steel shelves
- 4 Castors with 2 brakes
- 2 Sides safety glass
- With night curtain
- Ventilated cooling system
- Automatic defrost
- Stainless steel
- Condensator at back side, free maintenance
- Condensation water evaporated automatically

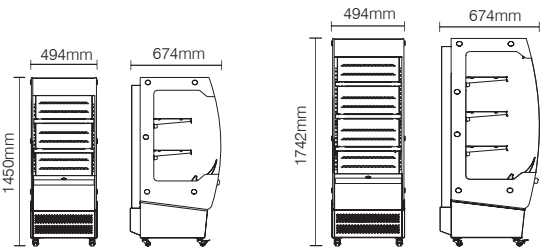

RTS-180L

RTS-220L




RTS-180L & RTS-220L

Model	RTS-180L	RTS-220L
Capacity-Gross	180L	220L
Temperature range	2-10°C (35.6-50 °F)	2-10°C (35.6-50 °F)
Rated Input Power	1340W / 1300W	1340W / 1300W
Refrigerant	R404a / R290	R404a / R290
Class mate	6	6
N.W.	82kg(180.8lbs)	96kg(211.6lbs)
G.W.	90.5kg(199.5lbs)	106kg(233.7lbs)
Overall Dimension	494×674×1450mm	494×674×1742mm
Overall Dimension	19.4×26.5×57.1inch	19.4×26.5×68.6inch
Package Dimmension	565×720×1610mm	565×720×1900mm
Package Dimmension	22.2×28.3×63.4inch	22.2×28.3×74.8inch
20' Container	32	32
40' Container	64	64
40' Container (high)	64	64

RTS-200L

Standard Features

- Brilliant Internal LED illumination each shelf
- Digital temperature controller and display
- Adjustable chrome plated shelves
- 4 Castors with 2 brakes
- 2 Sides safety glass
- With night curtain
- Ventilated cooling system
- Automatic defrost
- Stainless steel
- Condensation water evaporated automatically



RTS-200L



RTS-200L


Model	RTS-200L
Capacity-Gross	200L
Temperature range	2-10°C (35.6-50 °F)
Rated Input Power	1340W / 1300W
Refrigerant	R404a / R290
Class mate	6
N.W.	115kg(253.5lbs)
G.W.	130kg(286.6lbs)
Overall Dimension	1000×635×1250mm
Overall Dimension	39.4×25.0×49.2inch
Package Dimmension	1075×700×1400mm
Package Dimmension	42.3×27.6×55.1inch
20' Container	19
40' Container	40
40' Container (high)	40

OPEN REFRIGERATED SHOWCASE

OPEN DISPLAYS



RTS-190L
Standard Features
Brilliant Internal LED illumination each shelf
Digital temperature controller and display
4 Castors with 2 brakes
2 Sides safety glass
With night curtain
Ventilated cooling system
Automatic defrost
Condensation water evaporated automatically




RTS-190L

Model	RTS-190L
Capacity-Gross	190L
Temperature range	2-10°C (35.6-50 °F)
Rated Input Power	1340W / 1300W
Refrigerant	R404a / R290
Class mate	6
N.W.	100kg(220.1lbs)
G.W.	115kg(253.5lbs)
Overall Dimension	700×780×1473mm
Overall Dimension	27.6×30.7×58.0inch
Package Dimmension	765×820×1640mm
Package Dimmension	30.1×32.3×64.6inch
20" Container	19
40" Container	40
40" Container (high)	40

RTS-680L
Standard Features
Brilliant internal LED illumination under each shelf
Digital temperature control and display
Stainless steel shelves
4 Casters with 2 brakes
Tempered glass
Stainless steel louver
With curtain
Ventilated cooling system
Automatic defrost

Options
Glass side panel
Condensation water evaporated automatically

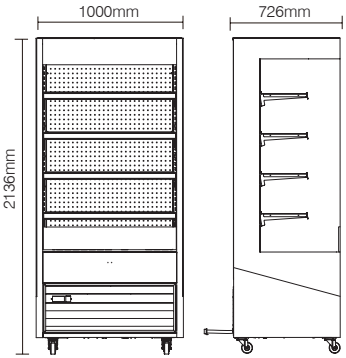

RTS-680L

Model	RTS-680L
Capacity-Gross	680L
Temperature range	2-10°C (35.6-50 °F)
Rated Input Power	1750W
Refrigerant	R404a
Class mate	3
N.W.	225.5kg(497.1lbs)
G.W.	245kg(540.1lbs)
Overall Dimension	1000×726×2136mm
Overall Dimension	39.4×28.6×84.1inch
Package Dimmension	1100×826×2300mm
Package Dimmension	43.3×32.5×90.6inch
20" Container	14
40" Container	28
40" Container (high)	28



RTS-680L


OPEN REFRIGERATED SHOWCASE

OPEN DISPLAYS



Standard Features

- Brilliant Internal LED illumination on sides
- Digital temperature controller and display
- Adjustable glass shelves
- Sliding doors
- Top front curved glass (Can be opened)
- Lower self service bin with night curtain
- Wood plastic board body
- Water tray can be connected with drain pipe
- 4 Casters with 2 brakes
- Ventilated cooling system
- Automatic defrost
- Condensation water evaporated automatically
- Double Cooling System
- Double individual temperature controller



LED lights




Digital
Controller





Castors




RTS-570L



RTS-540L



RTS-570L



Model	RTS-540L	RTS-570L
Capacity-Gross	540L	570L
Temperature range	2-10℃ (35.6-50 ℉)	2-10℃ (35.6-50 ℉)
Rated Input Power	1HP / (3/4)HP	1HP / (3/4)HP
Refrigerant	R404a / R290	R404a / R290
Class mate	3	3
N.W.	266(586.4)	272(600)
G.W.	310(683.4)	340(749.6)
Overall Dimension	1297×838×1553mm	1500×900×1500mm
Overall Dimension	51.1×33.0×61.1inch	59.1×35.4×59.1inch
Package Dimmension	1425×950×1740mm	1620×1200×1800mm
Package Dimmension	56.1×37.4×68.5inch	63.8×47.2×70.9inch
20" Container	8	4
40" Container	16	9
40" Container (high)	16	9

OPEN REFRIGERATED SHOWCASE

OPEN DISPLAYS



Standard Features

- Brilliant Internal LED illumination on sides
- Digital temperature controller and display
- With night curtain
- Wood plastic board body
- Water tray can be connected with drain pipe
- 4 Casters with 2 brakes
- Stainless steel louver
- Ventilated cooling system
- Automatic defrost
- Condensation water evaporated automatically

Options

Top Display



LED lights




Digital Controller




Castors



RTS-370L

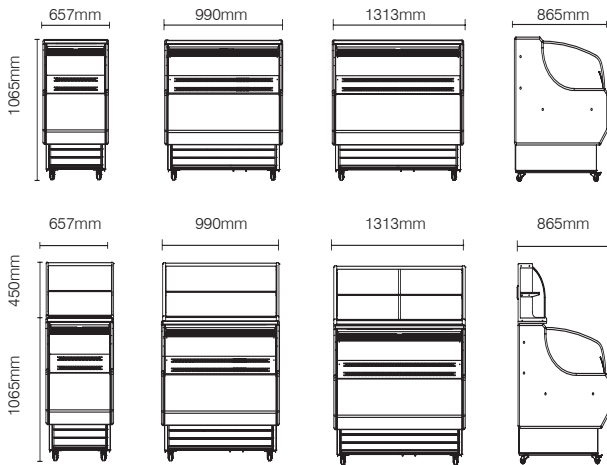

RTS-186L RTS-290L RTS-370L

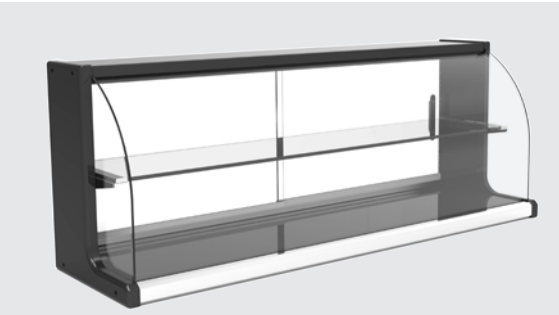

Options

Top Display

Model	RTS-186L	RTS-290L	RTS-370L
Capacity-Gross	186L	290L	370L
Temperature range	2-10°C (35.6-50 °F)	2-10°C (35.6-50 °F)	2-10°C (35.6-50 °F)
Rated Input Power	(3/4)HP	(3/4)HP	1HP / (3/4)HP
Refrigerant	R404a / R290	R404a / R290	R404a / R290
Class mate	3	3	3
N.W.	90kg(198.4lbs)	143kg(315.3lbs)	157kg(346.1lbs)
G.W.	120kg(264.6lbs)	170kg(374.8lbs)	195kg(429.9lbs)
Overall Dimension	657×865×1065mm	990×865×1065mm	1313×865×1065mm
Overall Dimension	25.9×34.1×41.9inch	39.0×34.1×41.9inch	51.7×34.1×41.9inch
Package Dimmension	770×975×1240mm	1110×975×1240mm	1425×975×1240mm
Package Dimmension	30.3×38.4×48.8inch	43.7×38.4×48.8inch	56.1×38.4×48.8inch
20" Container	17	17	8
40" Container	35	35	16
40" Container (high)	70	35	32

OPEN REFRIGERATED SHOWCASE

OPEN DISPLAYS





Standard Features

- Brilliant Internal LED illumination on sides
- Digital temperature controller and display
- Adjustable glass shelves
- Sliding doors
- Top front curved glass (Can be opened)
- Lower self service bin with night curtain
- Wood plastic board body
- Water tray can be connected with drain pipe
- 4 Casters with 2 brakes
- Ventilated cooling system
- Automatic defrost
- Condensation water evaporated automatically



RTS-510L

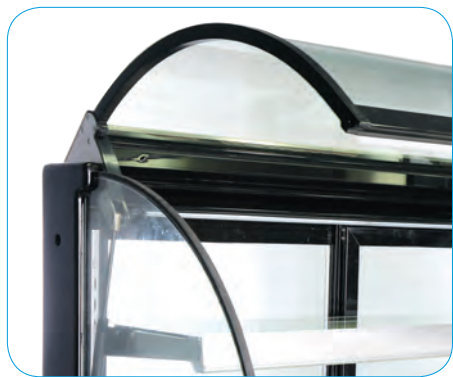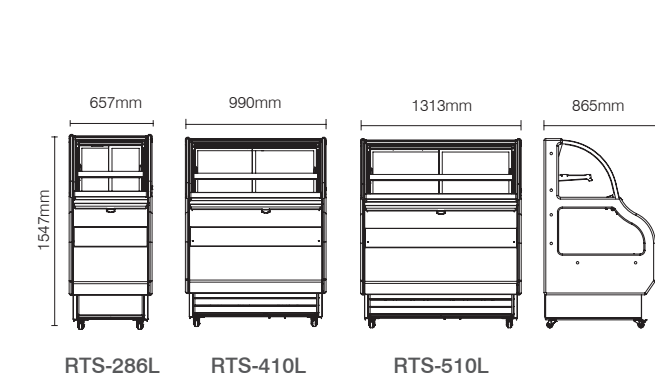

Model	RTS-286L	RTS-410L	RTS-510L
Capacity-Gross	286L	410L	570L
Temperature range	2-10°C (35.6-50 °F)	2-10°C (35.6-50 °F)	2-10°C (35.6-50 °F)
Rated Input Power	(3/4)HP	1HP / (3/4)HP	1HP / (3/4)HP
Refrigerant	R404a / R290	R404a / R290	R404a / R290
Class mate	3	3	3
N.W.	140kg(308.6lbs)	187kg(412.3lbs)	217kg(478.4lbs)
G.W.	167kg(368.2lbs)	225kg(496.0lbs)	252kg(555.6lbs)
Overall Dimension	657×865×1547mm	990×865×1547mm	1313×865×1547mm
Overall Dimension	25.9×34.1×60.9inch	39.0×34.1×60.9inch	51.7×34.1×60.9inch
Package Dimmension	760×975×1720mm	1100×975×1720mm	1425×975×1720mm
Package Dimmension	29.9×38.4×67.7inch	43.7×38.4×67.7inch	56.1×38.4×67.7inch
20" Container	17	8	8
40" Container	35	16	16
40" Container (high)	35	16	16




RTS-510L-2



Standard Features

- Brilliant Internal LED illumination on sides
- Digital temperature controller and display
- Adjustable glass shelves
- Sliding doors
- Lower self service bin with night curtain
- Wood plastic board body
- Water tray can be connected with drain pipe
- 4 Casters with 2 brakes
- Ventilated cooling system
- Automatic defrost
- Condensation water evaporated automatically

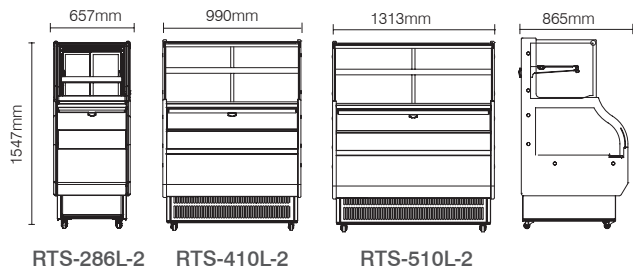

Model	RTS-286L-2	RTS-410L-2	RTS-510L-2
Capacity-Gross	286L	410L	570L
Temperature range	2-10°C (35.6-50 °F)	2-10°C (35.6-50 °F)	2-10°C (35.6-50 °F)
Rated Input Power	(3/4)HP	1HP / (3/4)HP	1HP / (3/4)HP
Refrigerant	R404a / R290	R404a / R290	R404a / R290
Class mate	3	3	3
N.W.	140kg(308.6lbs)	187kg(412.3lbs)	235kg(518.1lbs)
G.W.	167kg(368.2lbs)	225kg(496.0lbs)	270kg(595.2lbs)
Overall Dimension	657×865×1547mm	990×865×1547mm	1313×865×1547mm
Overall Dimension	25.9×34.1×60.9inch	39.0×34.1×60.9inch	51.7×34.1×60.9inch
Package Dimmension	760×975×1720mm	1100×975×1720mm	1425×975×1720mm
Package Dimmension	29.9×38.4×67.7inch	43.7×38.4×67.7inch	56.1×38.4×67.7inch
20" Container	17	8	8
40" Container	35	16	16
40" Container (high)	35	16	16

OPEN REFRIGERATED SHOWCASE

OPEN DISPLAYS


RTS-386L/RTS-770L

Standard Features

- Brilliant Internal LED illumination on sides
- Digital temperature controller and display
- With night curtain
- Wood plastic board body
- Water tray can be connected with drain pipe
- 4 Casters with 2 brakes
- Stainless steel louver
- Stainless steel shelves
- Ventilated cooling system
- Automatic defrost
- Condensation water evaporated automatically



RTS-386L & RTS-770L

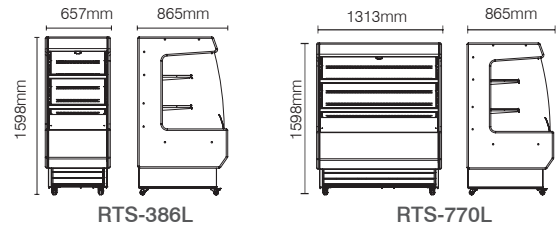

Model	RTS-386L	RTS-770L
Capacity-Gross	386L	770L
Temperature range	2-10°C (35.6-50 °F)	2-10°C (35.6-50 °F)
Rated Input Power	(3/4)HP	1HP / (3/4)HP
Refrigerant	R404a / R290	R404a / R290
Class mate	3	3
N.W.	130.5kg(287.7lbs)	196kg(432.1lbs)
G.W.	155.5kg(342.8lbs)	245kg(540.1lbs)
Overall Dimension	657×865×1598mm	1313×865×1598mm
Overall Dimension	25.9×34.1×62.9inch	51.7×34.1×62.9inch
Package Dimmension	770×975×1770mm	1425×975×1770mm
Package Dimmension	30.3×38.4×69.7inch	56.1×38.4×69.7inch
20" Container	17	8
40" Container	35	16
40" Container (high)	35	16




RTS-486L/RTS-970L

Standard Features

- Brilliant Internal LED illumination on sides
- Digital temperature controller and display
- With night curtain
- Wood plastic board body
- Water tray can be connected with drain pipe
- 4 Casters with 2 brakes
- Stainless steel louver
- Stainless steel shelves
- Ventilated cooling system
- Automatic defrost
- Condensation water evaporated automatically



RTS-486L & RTS-970L

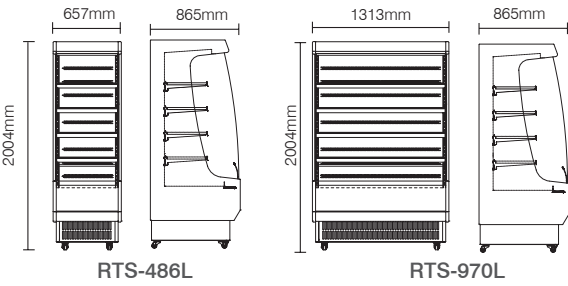

Model	RTS-486L	RTS-970L
Capacity-Gross	486L	970L
Temperature range	2-10°C (35.6-50 °F)	2-10°C (35.6-50 °F)
Rated Input Power	(3/4)HP	(3/2)HP / 2*(3/4)HP
Refrigerant	R404a / R290	R404a / R290
Class mate	3	3
N.W.	/	/
G.W.	/	/
Overall Dimension	657×865×2004mm	1313×865×2004mm
Overall Dimension	25.9×34.1×78.9inch	51.7×34.1×78.9inch
Package Dimmension	770×975×2175mm	1425×975×2175mm
Package Dimmension	30.3×38.4×85.6inch	56.1×38.4×85.6inch
20" Container	17	8
40" Container	35	16
40" Container (high)	35	16


OPEN REFRIGERATED SHOWCASE

OPEN DISPLAYS

RTS-348L/RTS-468L

Standard Features

- Brilliant Internal LED illumination on sides
- Digital temperature control and display
- Sliding doors
- Cold and hot can be interchanged of the top part
- Bottom part is open, come with night curtain
- With separete drain pipe
- 4 Casters with 2 brakes
- Ventilated cooling system
- Automatic defrost
- Condenser cleaning automaticly

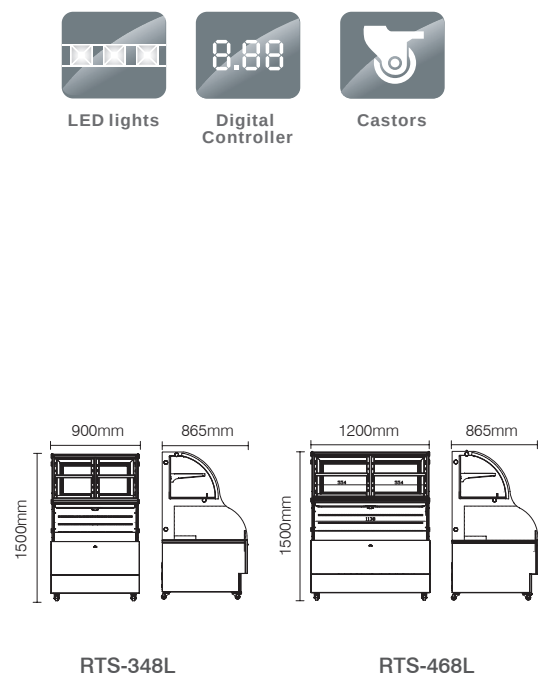

RTS-348L & RTS-468L


Model	RTS-348L	RTS-468L
Capacity-Gross	348L	468L
Temperature range	2-10°C (35.6-50 °F)	2-10°C (35.6-50 °F)
Rated Input Power	1004W	1204W
Refrigerant	R290	R290
Class mate	4	4
N.W.	213kg(469.6lbs)	237kg(522.5lbs)
G.W.	269kg(593.0lbs)	295kg(650.4lbs)
Overall Dimension	900×865×1500mm	1200×865×1500mm
Overall Dimension	35.4×34.1×59.1inch	40.2×34.1×59.1inch
Package Dimmension	990×975×1650mm	1290×975×1650mm
Package Dimmension	39.0×38.4×65.0inch	50.8×38.4×65.0inch
20" Container	12	10
40" Container	24	21
40" Container (high)	24	21



RT-330L

Standard Features

- Brilliant internal LED illumination on top
- Digital temperature controller and display
- Double glass
- Front and back sliding doors
- Adjustable PVC coated shelf
- Ventilated cooling system
- 4 Castors, 2 with brakes
- Automatic defrost



RT-330L

Model	RT-330L
Capacity-Gross	330L
Temperature range	0-12°C (32-53.6 °F)
Rated Input Power	346W / 430W
Refrigerant	R134a / R290
Class mate	4
N.W.	122kg(269.0lbs)
G.W.	134kg(295.4lbs)
Overall Dimension	1000×612×1400mm
Overall Dimension	39.4×24.1×55.1inch
Package Dimmension	1080×700×1540mm
Package Dimmension	42.5×27.6×60.6inch
20" Container	16
40" Container	33
40" Container (high)	33

OPEN REFRIGERATED SHOWCASE
OPEN DISPLAYS



RTS-440L



RTS-700L



RTS-530L



RTS-1050L

Standard Features

- Brilliant internal LED illumination under each shelf
- Digital temperature control and display
- Stainless steel shelves
- 4 Casters with 2 brakes
- Tempered glass
- Stainless steel louver
- With curtain
- Ventilated cooling system
- Automatic defrost

Options

- Glass side panel
- Condensation water evaporated automatically



Condenser cleaning automatically




LED lights




Digital Controller




Castors




RTS-440L



RTS-530L



RTS-700L



RTS-1050L

Model	RTS-440L	RTS-530L	RTS-700L	RTS-1050L
Capacity-Gross	440L	530L	700L	1050L
Temperature range	2-10°C (35.6-50 °F)	2-10°C (35.6-50 °F)	2-10°C (35.6-50 °F)	2-10°C (35.6-50 °F)
Rated Input Power	1380W	1380W	2350W	1870W
Refrigerant	R404a	R404a	R404a	R404a
Class mate	3	3	3	3
N.W.	132kg(291.0lbs)	139kg(306.4lbs)	190kg(418.9lbs)	242kg(533.5lbs)
G.W.	152kg(335.1lbs)	160kg(352.7lbs)	213kg(469.6lbs)	282kg(621.7lbs)
Overall Dimension	762×765×2070mm	915×765×2070mm	1220×765×2070mm	1829×765×2070mm
Overall Dimension	30.0×30.0×81.5inch	36.0×30.0×81.5inch	48.0×30.0×81.5inch	72.0×30.0×81.5inch
Package Dimmension	862×850×2230mm	1015×850×2230mm	1320×850×2230mm	1930×850×2230mm
Package Dimmension	33.9×33.5×87.8inch	40.0×33.5×87.8inch	52.0×33.5×87.8inch	76.0×33.5×87.8inch
20' Container	12	12	10	6
40' Container	26	26	21	13
40' Container (high)	26	26	21	13

OPEN REFRIGERATED SHOWCASE


OPEN DISPLAYS

RTS-965L/1275L
Standard Features
Internal LED illumination
Digital temperature control and display
Double tempered insulating glass
4 Castors, 2 with brakes
Ventilated cooling system without frost
Air inlet with filter
Condensate water evaporates automatically




RTS-965L & RTS-1275L

ARC-135L
Standard Features
Internal LED illumination
Optional top display shelf
Digital temperature controller and display
Optional marble
4 Castors & 4 Adjustable base Feet
Ventilated cooling system
Automatic defrost



ARC-135L

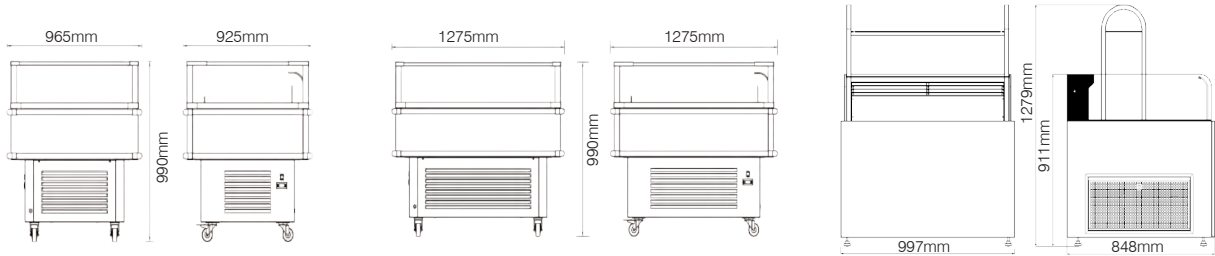

	RTS-965L	RTS-1275L	ARC-135L
Model	RTS-965L	RTS-1275L	ARC-135L
Capacity-Gross	173L	344L	135L
Temperature range	2-10°C (35.6-50 °F)	2-10°C (35.6-50 °F)	0-12°C (32-53.6 °F)
Rated Input Power	1350W	1450W	660W
Refrigerant	R290	R290	R290
Class mate	3	3	4
N.W.	95kg(209.4lbs)	162kg(357.1lbs)	170kg(374.8lbs)
G.W.	115kg(253.5lbs)	204kg(449.7lbs)	190kg(418.9lbs)
Overall Dimension	965×925×990mm	1275×1275×990mm	997×848×1279mm
Overall Dimension	38.0×36.4×39.0inch	50.2×50.2×39.0inch	39.3×33.4×50.4inch
Package Dimmension	1040×1000×1065mm	1350×1350×1065mm	1057×908×1365mm
Package Dimmension	40.9×39.4×41.9inch	53.1×53.1×41.9inch	41.6×35.7×53.7inch
20' Container	20	8	12
40' Container	44	16	24
40' Container (high)	44	16	24




DRY AGING

RTB-320C/540C
Standard Features

- Temperature and humidity controller
- Double tempered insulating glass
- UVC sterilization device
- Activated carbon ventilation system
- Adjustable PVC coated shelf
- Ventilated cooling system without frost
- Condensate water evaporates automatically
- Force saving door handle
- Antimicrobial inner tank



RTB-480C

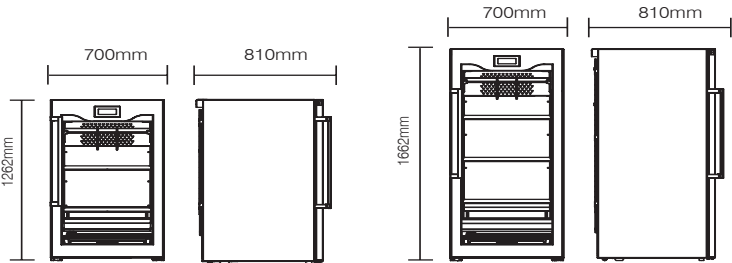

RTB-320C

RTB-480C

Model	RTB-320C	RTB-480C
Capacity-Gross	320L	480L
Temperature range	0-25℃ (32-77 ℉)	0-25℃ (32-77 ℉)
Rated Input Power	210W / 210W / 270W	200W / 220W / 240W
Refrigerant	R134a / R600a / R290	R134a / R600a / R290
Class mate	4	4
N.W.	105kg(231.5lbs)	122kg(269lbs)
G.W.	117kg(257.9lbs)	137kg(302lbs)
Overall Dimension	700×810×1262mm	700×810×1662mm
Overall Dimension	27.6×31.9×49.7inch	27.6×31.9×65.4inch
Package Dimmension	840×765×1420mm	840×765×1820mm
Package Dimmension	33.1×30.1×55.9inch	33.1×30.1×71.6inch
20' Container	21	21
40' Container	42	42
40' Container (high)	42	42



RTB-540C
Standard Features

- Temperature and humidity controller
- Double tempered insulating glass
- UVC sterilization device
- Activated carbon ventilation system
- Adjustable PVC coated shelf
- Ventilated cooling system without frost
- Condensate water evaporates automatically
- Force saving door handle
- Antimicrobial inner tank




RTB-540C



RTPH-508C

RTPH-508C
Standard Features

- Temperature and humidity controller
- Triple tempered insulating glass
- UVC sterilization device UVC
- Activated carbon ventilation system
- 304 Stainless steel shelf and internal material
- 4 Casters
- Ventilated cooling system without frost
- Condensate water evaporates automatically
- Automatic closing door
- Foot-operated door opener

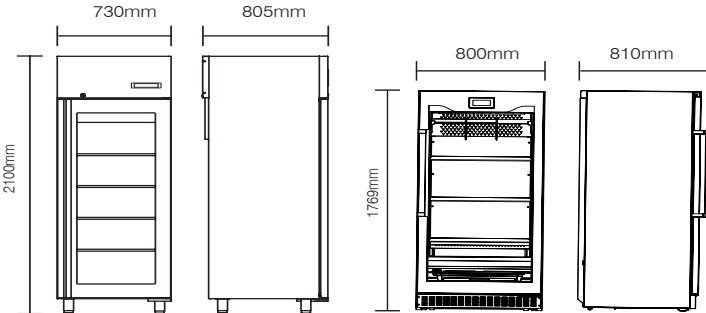

RTPH-508C

RTB-540C

Model	RTPH-508C	RTB-540C
Capacity-Gross	508L	540L
Temperature range	0-25℃ (32-77 ℉)	0-25℃ (32-77 ℉)
Rated Input Power	290W	400W
Refrigerant	R290	R290
Class mate	4	4
N.W.	166kg(366.0lbs)	161kg(354.9lbs)
G.W.	236kg(520.3lbs)	187kg(412.3lbs)
Overall Dimension	730×805×2100mm	800×810×1769mm
Overall Dimension	28.7×31.7×82.7inch	31.5×31.9×69.6inch
Package Dimmension	835×930×2270mm	830×860×1925mm
Package Dimmension	32.9×36.6×89.4inch	32.7×33.8×75.8inch
20' Container	12	14
40' Container	26	28
40' Container (high)	26	28

WINE COOLER



Circulated
air duct



High-efficient
cooling module



Wide-area
temperature
of 5-18 °C

ODIS

RT-400L-2 (Wine Refrigerator)

Standard Features

- Brilliant Internal LED illumination on sides
- Digital temperature controller and display
- Cooling system on top
- Wine shelf
- 4 sides triple glass
- 4 Castors, 2 with brakes
- Ventilated cooling system
- Automatic defrost


Options

Front flat glass door or Curved glass door

Compressor on top to avoid any damages caused by food residue. Cold and hot air exchange on top, so no need for extra space around the unit.



Curved glass door

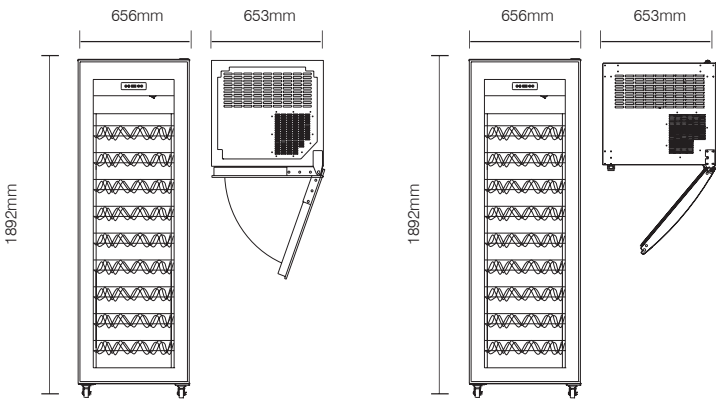

Front flat glass door
RT-400L-2

Curved glass door
RT-400L-2

Model	RT-400L-2 (Wine Refrigerator)
Capacity-Gross	81Pcs
Temperature range	5-18°C (41-64.4 °F)
Rated Input Power	500W
Refrigerant	R290
Class mate	4
N.W.	181kg(399.0lbs)
G.W.	204kg(449.7lbs)
Overall Dimension	656×653×1892mm
Overall Dimension	25.8×25.7×74.5inch
Package Dimmension	740×740×2050mm
Package Dimmension	29.1×29.1×80.7inch
20' Container	21
40' Container	45
40' Container (high)	45

Front flat glass door

Curved glass door

SALAD SHOWCASE


RT-1200L/1200L-2/1500L/1500L-2/1800L/1800L-2/2000L/2000L-2

Standard Features

- Digital temperature controller and display
- 4 sides glass
- Direct cooling system
- Automatic defrost
- With GN PAN
- Stainless Steel



RT-1200L

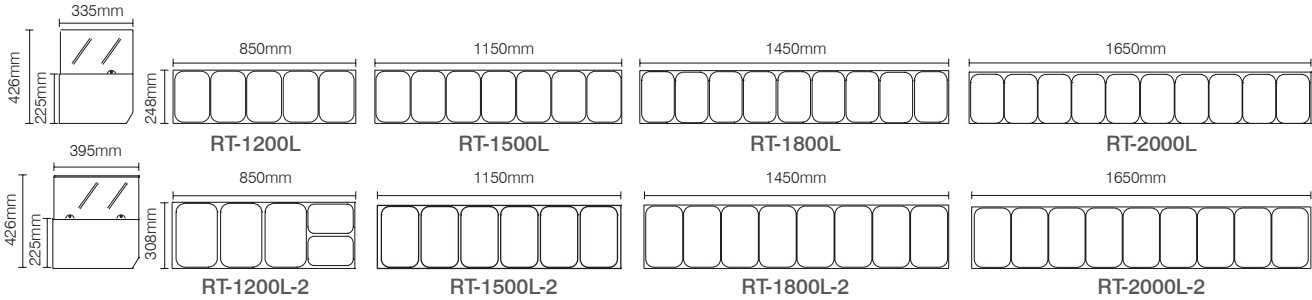

Model	RT-1200L	RT-1500L	RT-1800L	RT-2000L
Capacity-Gross	5*1/4 GN	7*1/4 GN	9*1/4 GN	10*1/4 GN
Temperature range	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)
Rated Input Power	157W / 125W	157W / 125W	170W / 140W	170W / 140W
Refrigerant	R134a / R600a	R134a / R600a	R134a / R600a	R134a / R600a
Class mate	4	4	4	4
N.W.	34.8kg(76.7lbs)	43.5kg(95.9lbs)	48.5kg(106.9lbs)	51.5kg(113.5lbs)
G.W.	37.5kg(82.7lbs)	45.5kg(100.3lbs)	51kg(112.4lbs)	54.5kg(120.2lbs)
Overall Dimension	1200×335×426mm	1500×335×426mm	1800×335×426mm	2000×335×426mm
Overall Dimension	47.2×13.2×16.8inch	59.1×13.2×16.8inch	70.9×13.2×16.8inch	78.7×13.2×16.8inch
Package Dimmension	1275×410×330mm	1575×410×330mm	1875×410×330mm	2075×410×330mm
Package Dimmension	50.2×16.1×13.0inch	62.0×16.1×13.0inch	73.8×16.1×13.0inch	81.7×16.1×13.0inch
20' Container	126	102	96	72
40' Container	276	216	204	150
40' Container (high)	322	252	238	175



Model	RT-1200L-2	RT-1500L-2	RT-1800L-2	RT-2000L-2
Capacity-Gross	3*1/3 GN+2*1/4 GN	6*1/3 GN	8*1/3 GN	9*1/3 GN
Temperature range	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)
Rated Input Power	157W / 125W	157W / 125W	170W / 140W	170W / 140W
Refrigerant	R134a / R600a	R134a / R600a	R134a / R600a	R134a / R600a
Class mate	4	4	4	4
N.W.	40.5kg(89.3lbs)	45.8kg(101.0lbs)	54.5kg(120.2lbs)	58.5kg(129.0lbs)
G.W.	42.5kg(93.7lbs)	48kg(105.8lbs)	57.5kg(126.8lbs)	61.5kg(135.6lbs)
Overall Dimension	1200×395×426mm	1500×395×426mm	1800×395×426mm	2000×395×426mm
Overall Dimension	47.2×15.6×16.8inch	59.1×15.6×16.8inch	70.9×15.6×16.8inch	78.7×15.6×16.8inch
Package Dimmension	1275×470×330mm	1575×470×330mm	1875×470×330mm	2075×470×330mm
Package Dimmension	50.2×18.5×13.0inch	62.0×18.5×13.0inch	73.8×18.5×13.0inch	81.7×18.5×13.0inch
20' Container	120	90	78	72
40' Container	252	186	168	144
40' Container (high)	294	217	196	168

SUSHI SHOWCASE

RTS-44L/64L/84L/104L

Standard Features

- Brilliant Internal LED illumination on top
- Digital temperature controller and display
- Front Flat glass
- Sliding doors
- Direct cooling system
- GN pan can be ordered

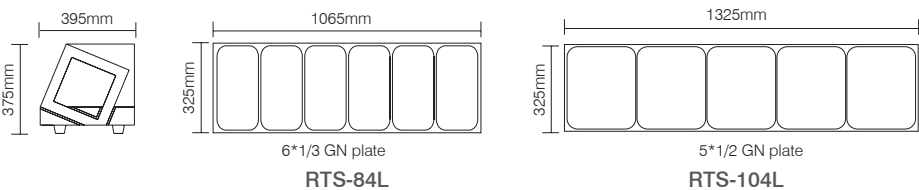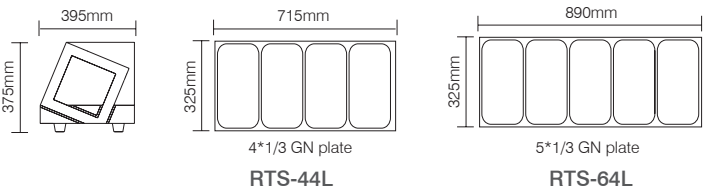

Model	RTS-44L	RTS-64L	RTS-84L	RTS-104L
Capacity-Gross	4*1/3 GN plate	5*1/3 GN plate	6*1/3 GN plate	5*1/2 GN plate
Temperature range	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)
Rated Input Power	160W	160W	160W	160W
Refrigerant	R134a / R600a	R134a / R600a	R134a / R600a	R134a / R600a
Class mate	3	3	3	3
N.W.	39kg(86.0lbs)	43kg(94.8lbs)	47kg(103.6lbs)	53kg(116.8lbs)
G.W.	42kg(92.6lbs)	46kg(101.4lbs)	50kg(110.2lbs)	57kg(125.7lbs)
Overall Dimension	1131×395×375mm	1307×395×375mm	1483×395×375mm	1754×395×375mm
Overall Dimension	44.5×15.6×14.8inch	51.5×15.6×14.8inch	58.4×15.6×14.8inch	69.1×15.6×14.8inch
Package Dimmension	1187×465×430mm	1363×465×430mm	1539×465×430mm	1810×465×430mm
Package Dimmension	46.7×18.3×16.9inch	53.7×18.3×16.9inch	60.6×18.3×16.9inch	71.3×18.3×16.9inch
20' Container	110	100	85	75
40' Container	235	205	185	155
40' Container (high)Colour	282	246	222	186
	black	black	black	black




RTS-198L

Standard Features

- Brilliant Internal LED illumination on top
- Digital temperature controller and display
- Front Curved glass
- Sliding doors
- Direct cooling system
- Automatic defrost
- Top evaporator with basin to collect condensation
- GN pan can be ordered



RTS-198L

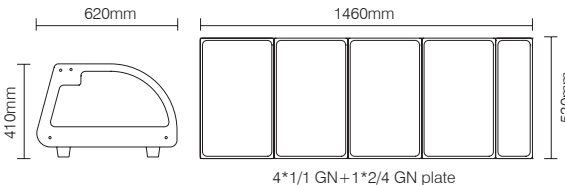

Model	RTS-198L
Capacity-Gross	4*1/1 GN+1*2/4 GN plate
Temperature range	0-12°C (32-53.6 °F)
Rated Input Power	200W
Refrigerant	R134a / R600a
Class mate	4
N.W.	63kg(138.9lbs)
G.W.	67kg(147.7lbs)
Overall Dimension	1800×620×410mm
Overall Dimension	70.9×24.4×16.1inch
Package Dimmension	1870×700×475mm
Package Dimmension	73.6×27.6×18.7inch
20' Container	54
40' Container	114
40' Container (high)	114

SUSHI SHOWCASE

Standard Features


- Brilliant Internal LED illumination on top
- Digital temperature controller and display
- Front Curved glass
- Sliding doors
- Direct cooling system
- Automatic defrost
- Top evaporator with basin to collect condensation
- GN pan can be ordered



Black Color



White Color

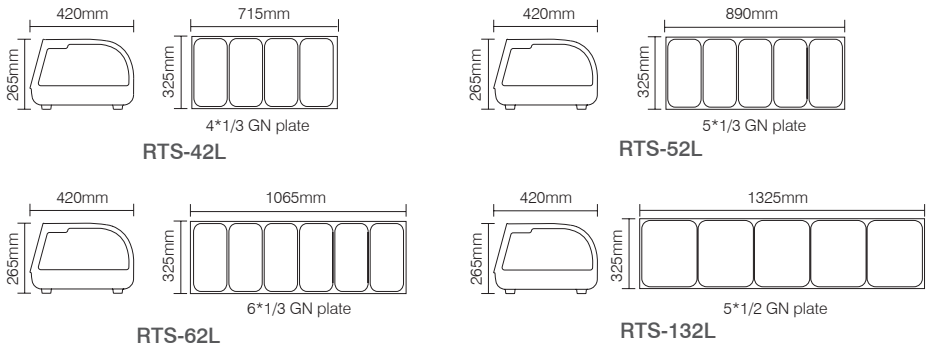

Model	RTS-42L	RTS-52L	RTS-62L	RTS-132L
Capacity-Gross	4*1/3 GN plate	5*1/3 GN plate	6*1/3 GN plate	5*1/2 GN plate
Temperature range	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)
Rated Input Power	180W / 190W	180W / 190W	180W / 190W	180W / 190W
Refrigerant	R134a / R600a	R134a / R600a	R134a / R600a	R134a / R600a
Class mate	4	4	4	4
N.W.	34.5kg(76.1lbs)	38.5kg(84.9lbs)	41.5kg(91.5lbs)	45kg(99.2lbs)
G.W.	36.5kg(80.5lbs)	40.5kg(89.3lbs)	44kg(97.0lbs)	49kg(108.0lbs)
Overall Dimension	1177×420×265mm	1352×420×265mm	1529×420×265mm	1800×420×265mm
Overall Dimension	46.3×16.5×10.4inch	53.2×16.5×10.4inch	60.2×16.5×10.4inch	70.9×16.5×10.4inch
Package Dimmension	1267×510×350mm	1443×510×350mm	1619×510×350mm	1890×510×350mm
Package Dimmension	49.9×20.1×13.8inch	56.8×20.1×13.8inch	63.7×20.1×13.8inch	74.4×20.1×13.8inch
20' Container	114	84	84	72
40' Container	246	192	124	144
40' Container (high)	287	224	203	168
Colour	White/Black/Silver	White/Black/Silver	White/Black/Silver	White/Black/Silver

ODIS

Standard Features

- Brilliant Internal LED illumination on top
- Digital temperature controller and display
- Front Curved glass
- Sliding doors
- Direct cooling system
- Automatic defrost
- Top evaporator with basin to collect condensation
- GN pan can be ordered

Options


Light box for advertisement



Black Color



White Color

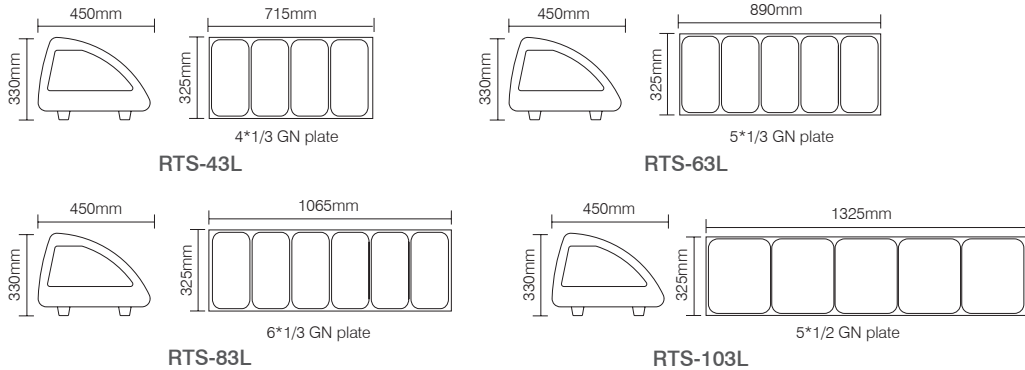

Model	RTS-43L	RTS-63L	RTS-83L	RTS-103L
Capacity-Gross	4*1/3 GN plate	5*1/3 GN plate	6*1/3 GN plate	5*1/2 GN plate
Temperature range	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)
Rated Input Power	160W	160W	160W	160W
Refrigerant	R134a / R600a	R134a / R600a	R134a / R600a	R134a / R600a
Class mate	3	3	3	3
N.W.	33kg(72.8lbs)	36kg(79.4lbs)	39kg(86.0lbs)	44kg(97.0lbs)
G.W.	36kg(79.4lbs)	40kg(88.2lbs)	43kg(94.8lbs)	48kg(105.8lbs)
Overall Dimension	1131×450×330mm	1307×450×330mm	1483×450×330mm	1754×450×330mm
Overall Dimension	44.5×17.7×13.0inch	51.5×17.7×13.0inch	58.4×17.7×13.0inch	69.1×17.7×13.0inch
Package Dimmension	1187×510×380mm	1363×510×380mm	1539×510×380mm	1810×510×380mm
Package Dimmension	46.7×20.1×15.0inch	53.7×20.1×15.0inch	60.6×20.1×15.0inch	71.3×20.1×15.0inch
20' Container	114	96	84	84
40' Container	240	198	174	168
40' Container (high)Colour	240	198	174	168
	White/Black	White/Black	White/Black	White/Black

FREEZER SHOWCASE
ICE CREAM DISPLAY



RTD-67L
Standard Features
Digital temperature controller and display
4X5L pan or 8X1/6 pan
Automatic defrost
Direct cooling system
Stainless Steel
Folding curved glass cover
On/off switch
Adjustable feet




RTD-67L




RTD-77L
Standard Features
Digital temperature controller and display
4X5L pan or 8X1/6 pan
Automatic defrost
Direct cooling system
Stainless Steel
Folding flat glass cover
On/off switch
Adjustable feet



RTD-77L




RTD-77L-2



RTD-77L-2
Standard Features
Digital temperature controller and display
4x5L pan with lid or 8x1/6 pan with lid
Automatic defrost
Direct cooling system
Stainless Steel
On/off switch
Adjustable feet
Without glass cover, with top light box




RTD-77L-2



RTD-67L

Model	RTD-77L-2	RTD-77L	RTD-67L
Capacity-Gross	77L	77L	67L
Temperature range	-18/-25℃ (-0.4/-13 ℃)	-18/-25℃ (-0.4/-13 ℃)	-18/-25℃ (-0.4/-13 ℃)
Rated Input Power	140W / 220W	140W / 220W	140W / 220W
Refrigerant	R134a / R290	R134a / R290	R134a / R290
Class mate	4	4	4
N.W.	28kg(61.8lbs)	38kg(83.8lbs)	34.5kg(76.1lbs)
G.W.	31kg(68.3lbs)	42.5kg(93.7lbs)	38.5kg(84.9lbs)
Overall Dimension	805×666×358mm	805×666×305mm	805×666×356mm
Overall Dimension	31.7×26.2×14.1inch	31.7×26.2×12.0inch	31.7×26.2×14.0inch
Package Dimmension	880×715×420mm	875×740×420mm	880×715×420mm
Package Dimmension	34.6×28.1×16.5inch	34.4×29.1×16.5inch	34.6×28.1×16.5inch
20' Container	110	114	110
40' Container	210	234	210
40' Container (high)	252	273	252

FREEZER SHOWCASE
ICE CREAM DISPLAY



RTD-122L-1
Standard Features
Digital temperature control and display
Sliding doors at back side
Brilliant internal LED illumination on top and bottom
Ventilated cooling system




RTD-122L-1



RTD-122L/142L
Standard Features
Brilliant Internal LED illumination on sides
Digital temperature controller and display
Adjustable chrome plated shelves
4 Sides triple glass
Ventilated cooling system
Automatic defrost
4 Castors with 2 brakes
Display for ice cream



RTD-122L & RTD-142L



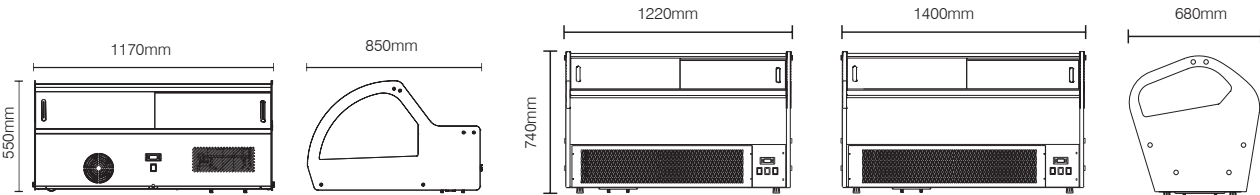


Model	RTD-122L-1	RTD-122L	RTD-142L
Capacity-Gross	122L	122L	142L
Temperature range	-13/-22°C (8.6/-7.6 °F)	-13/-22°C (8.6/-7.6 °F)	-13/-22°C (8.6/-7.6 °F)
Rated Input Power	780W	780W	860W
Refrigerant	R404a	R404a	R404a
Class mate	6	6	6
N.W.	106kg(233.7lbs)	115kg(253.5lbs)	139kg(306.4lbs)
G.W.	132kg(291.0lbs)	140kg(308.6lbs)	164kg(361.6lbs)
Overall Dimension	1170×850×550mm	1220×680×740mm	1400×680×740mm
Overall Dimension	46.1×33.5×21.7inch	48.0×27.8×29.1inch	55.1×27.8×29.1inch
Package Dimmension	1240×934×715mm	1277×786×950mm	1457×786×940mm
Package Dimmension	48.8×36.8×28.1inch	50.3×30.9×37.4inch	57.4×30.9×37.0inch
20' Container	30	24	20
40' Container	66	54	44
40' Container (high)	88	54	44

FREEZER SHOWCASE
ICE CREAM DISPLAY



RTD-75L
Standard Features
Brilliant Internal LED illumination on sides
Digital temperature controller and display
Adjustable chrome plated shelves
4 Sides three layers glass
Ventilated cooling system
Automatic defrost
Adjustable base feet

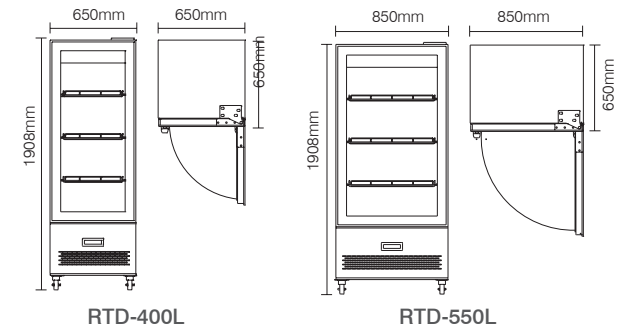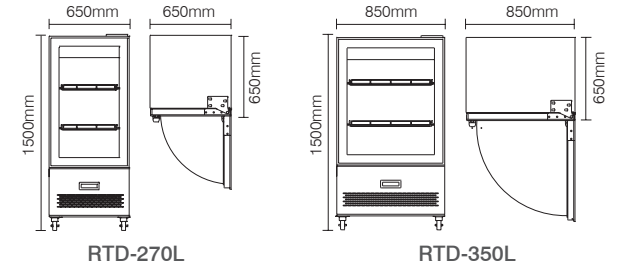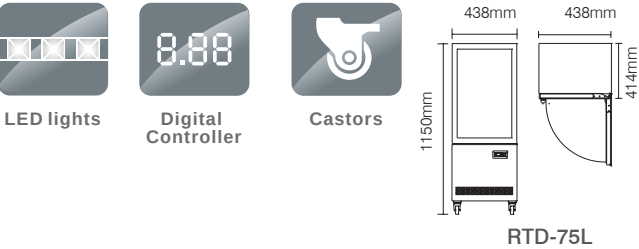

RTD-400L

RTD-270L/350L/400L/550L
Standard Features
Brilliant Internal LED illumination on sides
Digital temperature controller and display
Adjustable chrome plated shelves
4 Sides triple glass
Ventilated cooling system
Automatic defrost
4 Castors with 2 brakes

RTD-49L/49L-2/99L/99L-2/109L/109L-2
Standard Features
Brilliant internal LED illumination on top
Digital temperature controller and display
Triple glass door
Automatic closing door
Adjustable PVC coated shelf
Ventilated cooling system
Automatic defrost
Maintenance free condenser
Lockable Door


RTD-49L-2/99L-2/109L-2
With TOP light box



RTD-49L-2 & RTD-99L-2 & RTD-109L-2



RTD-49L & RTD-99L & RTD-109L

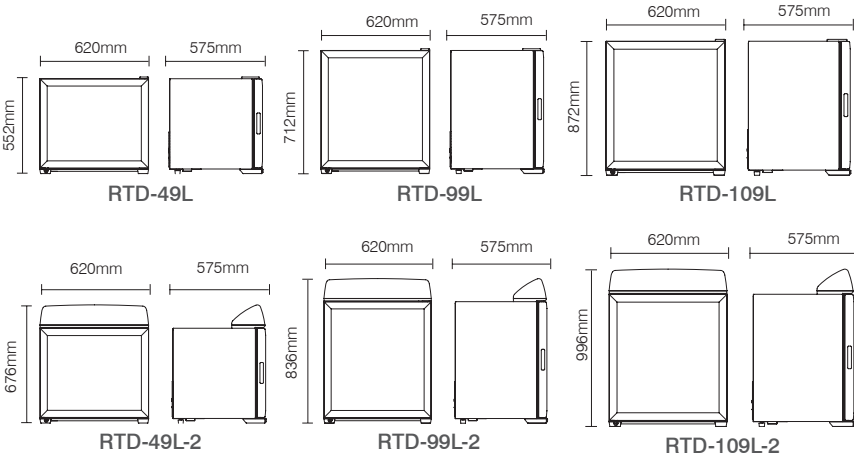

Model	RTD-75L	RTD-270L	RTD-350L	RTD-400L	RTD-550L
Capacity-Gross	75L	270L	350L	400L	550L
Temperature range	-22/-26°C (-7.6/-14.8 °F)	-13/-22°C (8.6/-7.6 °F)	-13/-22°C (8.6/-7.6 °F)	-13/-22°C (8.6/-7.6 °F)	-13/-22°C (8.6/-7.6 °F)
Rated Input Power	800W	980W	1000W	980W	1000W
Refrigerant	R404a	R404a	R404a	R404a	R404a
Class mate	4	6	6	6	6
N.W.	66kg(145.5lbs)	167kg(368.2lbs)	192kg(423.3lbs)	210kg(463.0lbs)	225kg(496.0lbs)
G.W.	69kg(152.1lbs)	181kg(399.0lbs)	208kg(458.6lbs)	225kg(496.0lbs)	243kg(535.7lbs)
Overall Dimension	438×414×1150mm	650×650×1500mm	850×650×1500mm	650×650×1908mm	850×650×1908mm
Overall Dimension	17.2×16.3×45.3inch	25.6×25.6×59.1inch	33.5×25.6×59.1inch	25.6×25.6×75.1inch	33.5×25.6×75.1inch
Package Dimmension	495×475×1120mm	740×740×1650mm	940×740×1650mm	740×740×2050mm	940×740×2050mm
Package Dimmension	19.5×18.7×44.1inch	29.1×29.1×65.0inch	37.0×29.1×65.0inch	29.1×29.1×80.7inch	37.0×29.0×80.7inch
20' Container	48	21	18	21	18
40' Container	96	45	36	45	36
40' Container (high)	192	45	36	45	45

Model	RTD-49L	RTD-49L-2	RTD-99L	RTD-99L-2	RTD-109L	RTD-109L-2
Capacity-Gross	55L	55L	90L	90L	112L	112L
Temperature range	-13/-22°C (8.6/-7.6 °F)	-13/-22°C (8.6/-7.6 °F)	-13/-22°C (8.6/-7.6 °F)	-13/-22°C (8.6/-7.6 °F)	-13/-22°C (8.6/-7.6 °F)	-13/-22°C (8.6/-7.6 °F)
Defrost Power	210W	210W	320W	320W	320W	320W
Refrigerant	R134a / R290	R134a / R290	R134a / R290	R134a / R290	R290	R290
Class mate	4	4	4	4	4	4
N.W.	35kg(77.2lbs)	36kg(79.4lbs)	41kg(90.4lbs)	42kg(92.6lbs)	56.5kg(124.6lbs)	57.5kg(126.8lbs)
G.W.	38kg(83.8lbs)	39kg(86.0lbs)	44kg(97.0lbs)	45kg(99.2lbs)	59.5kg(131.2lbs)	60.5kg(133.4lbs)
Overall Dimension	620×575×552mm	620×575×676mm	620×575×712mm	620×575×836mm	620×575×872mm	620×575×996mm
Overall Dimension	24.4×22.6×21.7inch	24.4×22.6×26.6inch	24.4×22.6×28.0inch	24.4×22.6×32.9inch	24.4×22.6×34.3inch	24.4×22.6×39.2inch
Package Dimmension	700×655×605mm	700×655×745mm	700×655×765mm	700×655×905mm	700×655×925mm	700×655×1065mm
Package Dimmension	27.6×25.8×23.8inch	27.6×25.8×29.3inch	27.6×25.8×30.1inch	27.6×25.8×35.6inch	27.6×25.8×36.4inch	27.6×25.8×41.9inch
20' Container	72	72	72	48	48	48
40' Container	162	162	162	108	108	108
40' Container (high)	216	162	162	108	108	108

REFRIGERATED AND HOT BUFFET TROLLEY


REFRIGERATED SHOWCASE



RTW-175L/255L

Standard Features

- Brilliant Internal LED illumination on the top
- Digital temperature control and display
- Top evaporator with basin to collect condensation
- Direct cooling system
- Automatic defrost
- Single Glass
- Front curved Glass
- Sliding doors at back side
- With trolley or without trolley
- GN pan can be ordered

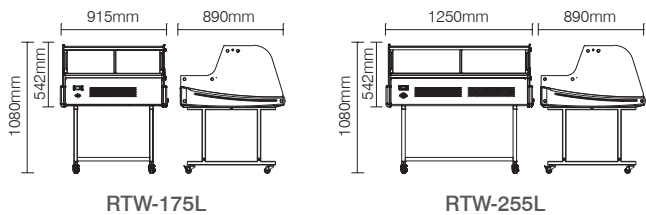

RTW-175L & RTW-255L

Model	RTW-175L	RTW-255L
Capacity-Gross	175L	255L
Temperature range	2-12°C (35.6-53.6 °F)	2-12°C (35.6-53.6 °F)
Rated Input Power	200W	200W
Refrigerant	R134a / R600a	R134a / R600a
Class mate	3/4	3/4
N.W.	66kg(145.5lbs)	84kg(185.2lbs)
G.W.	70kg(154.3lbs)	88kg(194.0lbs)
Overall Dimension	915×890×542/1080mm	1250×890×542/1080mm
Overall Dimension	36.0×35.0×21.3/42.5inch	49.2×35.0×21.3/42.5inch
Package Dimmension	960×960×668mm	1300×960×668mm
Package Dimmension	37.8×37.8×26.3inch	51.2×37.8×26.3inch
20' Container	30	27
40' Container	72	63
40' Container (high)	96	84

REFRIGERATED AND HOT BUFFET TROLLEY

COLD BUFFET TROLLEY

ODIS


RTS-1400L/1400L-2/1400L-3

Standard Features

Refrigerated food can be fully displayed
Transparent protective screen
4 castors(2 with brakes)
Ventilated cooling system
Can be moved freely
with LED




RTS-1400L-2

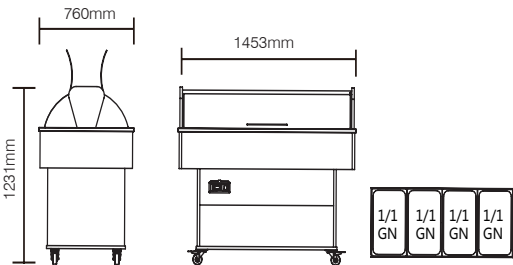

RTS-1400L-2



RTS-1400L-3

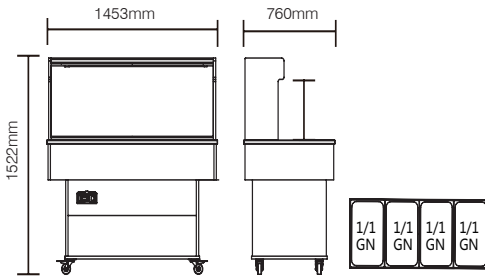


RTS-1400L-3

Model	RTS-1400L	RTS-1400L-2	RTS-1400L-3
Capacity-Gross	Basin made of stainless steel 8*1/1 GN	Basin made of stainless steel 4*1/1 GN	Basin made of stainless steel 4*1/1 GN
Temperature range	2-12°C (35.6-53.6 °F)	2-12°C (35.6-53.6 °F)	2-12°C (35.6-53.6 °F)
Rated Input Power	432W	330W	330W
Refrigerant	R290	R290	R290
Class mate	4	4	4
N.W.	200kg(440.9lbs)	129kg(284.4lbs)	141.5kg(312.0lbs)
G.W.	275kg(606.3lbs)	184kg(405.7lbs)	197kg(434.3lbs)
Overall Dimension	1426×1426×1704mm	1453×760×1231mm	1453×760×1522mm
Overall Dimension	56.1×56.1×67.1inch	57.2×29.9×48.5inch	57.2×29.9×59.9inch
Package Dimmension	1530×1530×1400mm	1650×960×1290mm	1650×960×1580mm
Package Dimmension	60.2×60.2×55.1inch	65.0×37.8×50.8inch	65.0×37.8×62.2inch
20' Container	3	6	6
40' Container	7	12	12
40' Container (high)	7	12	12



RTS-1400L

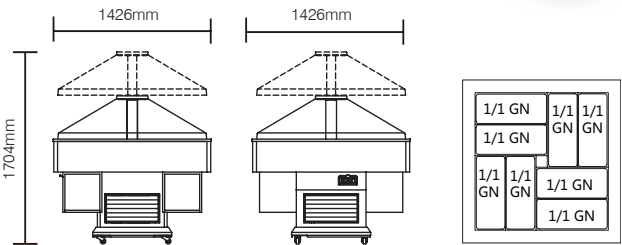

RTS-1400L


REFRIGERATED AND HOT BUFFET TROLLEY

COLD BUFFET TROLLEY

RTS-1210L/1490L/2150L

Standard Features

- Cold dishes are presented perfectly
- The salad bar is optimally equipped with integrated lighting,cough protection shelving and wheels for easy mobility
- Basin made of stainless steel
- Worktop made of granite Rosa Porrino
- Side walls and body made of wood
- 4 castors(2 with brakes)
- Sneeze screen,illuminated
- Temperature range 2°C to 10°C
- Easy assembly

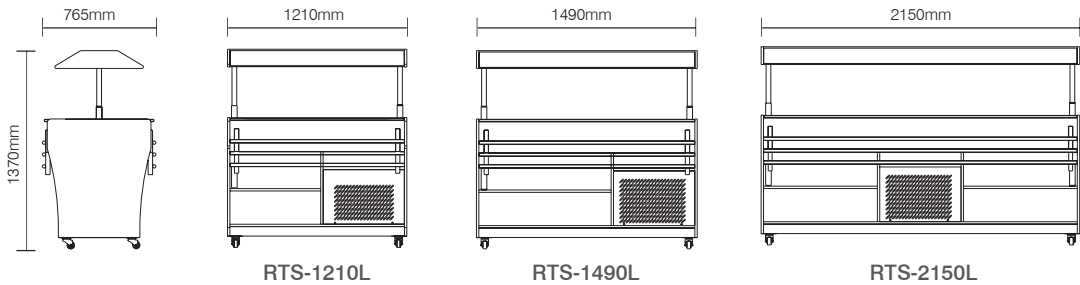


Model	RTS-1210L	RTS-1490L	RTS-2150L
Capacity-Gross	Basin made of stainless steel 3*1/1 GN 150mm deep	Basin made of stainless steel 4*1/1 GN 150mm deep	Basin made of stainless steel 6*1/1 GN 150mm deep
Temperature range	2-10°C (35.6-50 °F)	2-10°C (35.6-50 °F)	2-10°C (35.6-50 °F)
Rated Input Power	170W / 170W / 270W	170W / 170W / 270W	200W / 200W / 270W
Refrigerant	R134a / R600a / R290	R134a / R600a / R290	R134a / R600a / R290
Class mate	4	4	4
N.W.	104kg(229.3lbs)	123kg(271.1lbs)	156kg(343.9lbs)
G.W.	125kg(275.6lbs)	173kg(381.4lbs)	217kg(478.4lbs)
Overall Dimension	1210×765×1370mm	1490×765×1370mm	2150×765×1370mm
Overall Dimension	47.6×30.1×53.9inch	58.7×30.1×53.9inch	84.6×30.1×53.9inch
Package Dimmension	1300×855×1120mm	1590×855×1120mm	2240×855×1120mm
Package Dimmension	51.2×33.7×44.1inch	62.6×33.7×44.1inch	88.2×33.7×44.1inch
20' Container	11	7	7
40' Container	23	14	14
40' Container (high)	46	28	28
Colour	Walnut /Teak /Black	Walnut /Teak /Black	Walnut /Teak /Black

REFRIGERATED AND HOT BUFFET TROLLEY

WARM BUFFET TROLLEY


RTR-2150L/1490L/1210L

- Hot dishes are presented perfectly
- The hot-display is optimally equipped with integrated lighting,cough protection
- Shelving and wheels for easy mobility
- Basin made of stainless steel with drain-tap
- Worktop made of granite Rosa Porrino
- Side walls and body made of wood
- 4 castors(2 with brakes)
- Sneeze screen,illuminated
- Easy assembly

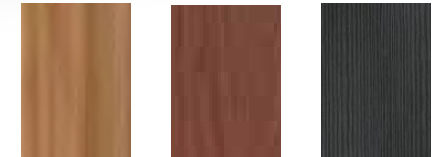

Walnut colour Teak colour Black colour

ODIS

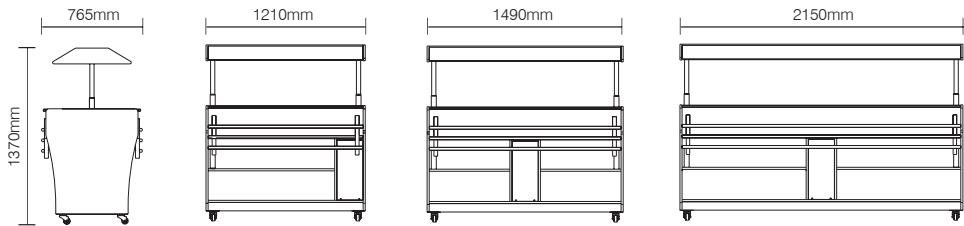

RTR-1210L RTR-1490L RTR-2150L

Model	RTR-1210L	RTR-1490L	RTR-2150L
Capacity-Gross	Basin made of stainless steel 3*1/1 GN 150mm deep	Basin made of stainless steel 4*1/1 GN 150mm deep	2 Basin made of stainless steel each for 6*1/1 GN 150mm deep
Temperature range	30-90°C (86-194 °F)	30-90°C (86-194 °F)	30-90°C (86-194 °F)
Rated Input Power	2000W	2000W	3000W
N.W.	84kg(185.2lbs)	109kg(240.3lbs)	141kg(310.9lbs)
G.W.	105kg(231.5lbs)	159kg(350.5lbs)	199kg(438.7lbs)
Overall Dimension	1210×765×1370mm	1490×765×1370mm	2150×765×1370mm
Overall Dimension	47.6×30.1×53.9inch	58.7×30.1×53.9inch	84.6×30.1×53.9inch
Package Dimmension	1300×855×1120mm	1590×855×1120mm	2240×855×1120mm
Package Dimmension	51.2×33.7×44.1inch	62.6×33.7×44.1inch	88.2×33.7×44.1inch
20' Container	11	7	7
40' Container	23	14	14
40' Container (high)	46	28	28
Colour	Walnut /Teak /Black	Walnut /Teak /Black	Walnut /Teak /Black

HOT SHOWCASE
HOT DISPLAY



HOT DISPLAY

RTR-120L/160L/202L/252L

Standard Features

- Brilliant Internal LED illumination on top
- Adjustable temperature controller
- Temperature display
- Adjustable chrome plated shelves
- Front Curved glass
- Sliding doors




LED lights



Temperature
Controller



RTR-160L

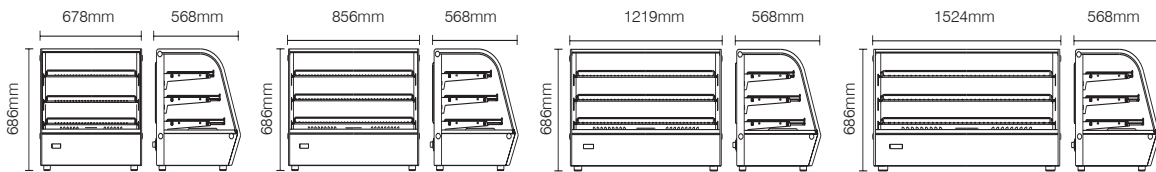

RTR-120L

RTR-160L

RTR-202L

RTR-252L


Model	RTR-120L	RTR-160L	RTR-202L	RTR-252L
Capacity-Gross	120L	160L	202L	252L
Temperature range	30-90°C (86-194 °F)	30-90°C (86-194 °F)	30-90°C (86-194 °F)	30-90°C (86-194 °F)
Rated Input Power	1100W	1500W	1800W	1800W
N.W.	35kg(77.2lbs)	43kg(94.8lbs)	56.5kg(124.6lbs)	72kg(158.7lbs)
G.W.	38kg(83.8lbs)	46kg(101.4lbs)	59.5kg(131.2lbs)	76kg(167.6lbs)
Overall Dimension	678×568×686mm	856×568×686mm	1219×568×686mm	1524×568×686mm
Overall Dimension	26.7×22.4×27.0inch	33.7×22.4×27.0inch	48.0×22.4×27.0inch	60.0×22.4×27.0inch
Package Dimmension	749×627×731mm	928×627×731mm	1290×627×731mm	1595×627×731mm
Package Dimmension	29.5×24.7×28.8inch	36.5×24.7×28.8inch	50.8×24.7×28.8inch	62.8×24.7×28.8inch
20' Container	81	63	39	36
40' Container	162	126	84	75
40' Container (high)	162	126	84	75

HOT SHOWCASE


HOT DISPLAY

Standard Features

- Brilliant Internal LED illumination on top
- Adjustable temperature controller
- Temperature display
- Adjustable chrome plated shelves
- Sliding doors
- Front flat glass



RTR-130L-1 & RTR-160L-2

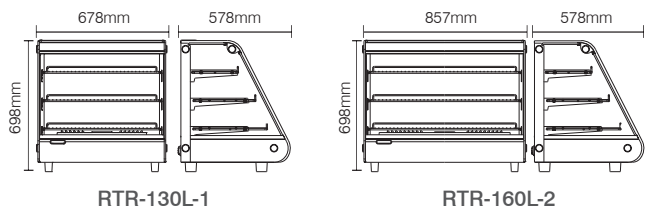


Model	RTR-130L-1	RTR-160L-2
Capacity-Gross	130L	160L
Temperature range	30-90°C (86-194 °F)	30-90°C (86-194 °F)
Rated Input Power	1100W	1500W
N.W.	34.5kg(76.1lbs)	42kg(92.6lbs)
G.W.	38kg(83.8lbs)	45.5kg(100.3lbs)
Overall Dimension	678×578×698mm	857×578×698mm
Overall Dimension	26.7×22.8×27.5inch	33.7×22.8×27.5inch
Package Dimmension	749×627×731mm	928×627×731mm
Package Dimmension	29.5×24.7×28.8inch	36.5×24.7×28.8inch
20' Container	81	63
40' Container	162	126
40' Container (high)	162	126

HOT DISPLAY


RTR-125L/165L/205L/256L

Standard Features

- Brilliant Internal LED illumination on top
- Adjustable temperature controller
- Temperature display
- Adjustable chrome plated shelves
- Front flat glass
- Front and back sliding doors



RTR-125L

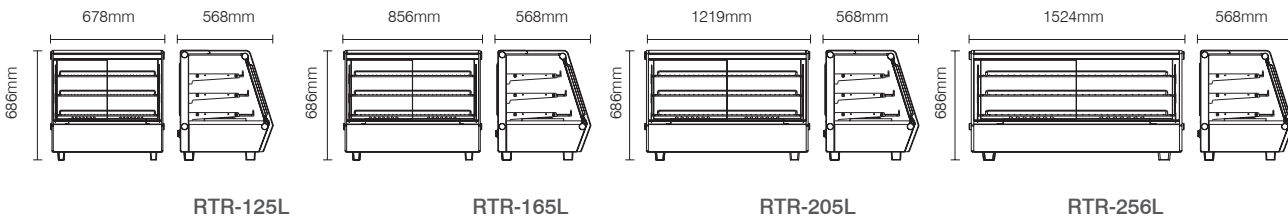

Model	RTR-125L	RTR-165L	RTR-205L	RTR-256L
Capacity-Gross	125L	165L	205L	256L
Temperature range	30-90°C (86-194 °F)	30-90°C (86-194 °F)	30-90°C (86-194 °F)	30-90°C (86-194 °F)
Rated Input Power	1100W	1500W	1800W	1800W
N.W.	36kg(79.4lbs)	51kg(112.4lbs)	60kg(132.3lbs)	76kg(167.6lbs)
G.W.	40kg(88.2lbs)	53kg(116.8lbs)	62kg(136.7lbs)	80kg(176.4lbs)
Overall Dimension	678×568×686mm	856×568×686mm	1219×568×685mm	1524×568×686mm
Overall Dimension	26.7×22.4×27.0inch	33.7×22.4×27.0inch	48.0×22.4×27.0inch	60.0×22.4×27.0inch
Package Dimmension	749×627×731mm	928×627×731mm	1290×627×735mm	1595×627×731mm
Package Dimmension	29.5×24.7×28.8inch	36.5×24.7×28.8inch	50.8×24.7×28.9inch	62.8×24.7×28.8inch
20' Container	81	63	39	36
40' Container	162	126	84	75
40' Container (high)	162	126	84	75

HOT SHOWCASE
HOT DISPLAY



LED lights



Temperature
Controller



HOT SHOWCASE
HOT DISPLAY

ODIS

RTR-120L-5/160L-5/202L-5/252L-5

Standard Features

- Brilliant Internal LED illumination on top
- Adjustable temperature controller
- Temperature display
- Adjustable chrome plated shelves
- Front flat glass
- Sliding doors




LED lights



Temperature
Controller



RTR-120L-5

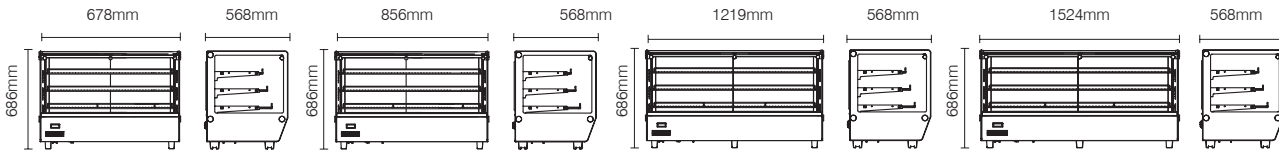

RTR-120L-5

RTR-160L-5

RTR-202L-5

RTR-252L-5

Model	RTR-120L-5	RTR-160L-5	RTR-202L-5	RTR-252L-5
Capacity-Gross	120L	160L	202L	252L
Temperature range	30-90°C (86-194 °F)	30-90°C (86-194 °F)	30-90°C (86-194 °F)	30-90°C (86-194 °F)
Rated Input Power	1100W	1500W	1800W	1800W
N.W.	38.5kg(81.9lbs)	47kg(103.6lbs)	60kg(132.3lbs)	74kg(163.1lbs)
G.W.	41.5kg(91.5lbs)	50kg(110.2lbs)	63kg(138.9lbs)	78kg(172.0lbs)
Overall Dimension	678×568×686mm	856×568×686mm	1219×568×685mm	1524×568×686mm
Overall Dimension	26.7×22.4×27.0inch	33.7×22.4×27.0inch	48.0×22.4×27.0inch	60.0×22.4×27.0inch
Package Dimmension	749×627×731mm	928×627×731mm	1290×627×735mm	1595×627×731mm
Package Dimmension	29.5×24.7×28.8inch	36.5×24.7×28.8inch	50.8×24.7×28.9inch	62.8×24.7×28.8inch
20' Container	81	63	39	36
40' Container	162	126	84	75
40' Container (high)	162	126	84	75

HOT SHOWCASE
HOT DISPLAY



Standard Features


- Brilliant Internal LED illumination on top
- Adjustable temperature controller
- Temperature display
- Adjustable chrome plated shelves
- Sliding doors
- Front Curved glass



LED lights



Temperature Controller

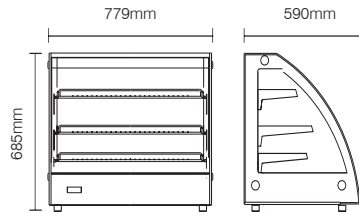

RTR-130L-2

Model	RTR-130L-2
Capacity-Gross	130L
Temperature range	30-90°C (86-194 °F)
Rated Input Power	1100W
N.W.	50kg(110.2lbs)
G.W.	54.5kg(120.2lbs)
Overall Dimension	779×590×685mm
Overall Dimension	30.7×23.2×27.0inch
Package Dimmension	860×642×735mm
Package Dimmension	33.9×25.3×28.9inch
20' Container	60
40' Container	132
40' Container (high)	132

HOT DISPLAY

RTR-67L/RTR-77L

Standard Features


- Folding complete glass cover
- On/off switch
- Adjustable feet
- 8x1/6 GN PAN or 4x1/3 GN PAN
- Adjustable temperature controller
- Temperature display
- Double tempered glass



RTR-67L



RTR-77L




RTR-77L




RTR-67L

Model	RTR-67L	RTR-77L
Capacity-Gross	24.5L	24.5L
Temperature range	30-90°C (86-194 °F)	30-90°C (86-194 °F)
Rated Input Power	500W	500W
N.W.	17.5kg(38.6lbs)	19.5kg(43.0lbs)
G.W.	20kg(44.1lbs)	22kg(48.5lbs)
Overall Dimension	767×612×328mm	767×612×240mm
Overall Dimension	30.2×24.1×12.9inch	30.2×24.1×9.4inch
Package Dimmension	850×695×390mm	840×690×390mm
Package Dimmension	33.5×27.4×15.4inch	33.1×27.2×15.4inch
20' Container	105	105
40' Container	215	215
40' Container (high)	258	258

HOT SHOWCASE
HOT DISPLAY



RTR-97L-2
Standard Features
Adjustable temperature controller
Temperature display
Rotational chrome plated shelves
Front top decals




RTR-97L-2




RTR-97L-2

Model	RTR-97L-2
Capacity-Gross	97L
Temperature range	30-90°C (86-194 °F)
Rated Input Power	800W
N.W.	22kg(48.5lbs)
G.W.	24kg(52.9lbs)
Overall Dimension	460×448×785mm
Overall Dimension	18.1×17.6×30.9inch
Package Dimmension	534×537×833mm
Package Dimmension	21.0×21.1×32.8inch
20' Container	80
40' Container	168
40' Container (high)	252

HOT DISPLAY



RTR-108L




RTR-108L

RTR-108L
Standard Features
Brilliant Internal LED illumination on sides
Adjustable temperature controller
Temperature display
Rotational chrome plated shelves
Adjustable feet

Model	RTR-108L
Capacity-Gross	108L
Temperature range	30-90°C (86-194 °F)
Rated Input Power	1200W
N.W.	33kg(72.8lbs)
G.W.	35kg(77.2lbs)
Overall Dimension	470×470×870mm
Overall Dimension	18.5×18.5×34.3inch
Package Dimmension	560×530×938mm
Package Dimmension	22.0×20.9×36.9inch
20' Container	88
40' Container	176
40' Container (high)	176

HOT SHOWCASE
HOT DISPLAY

- RTR-97L/137L/107L**
Standard Features
Adjustable temperature controller
Temperature display
Adjustable chrome plated shelves
Back doors
Front top light box with decals



RTR-137L


HOT DISPLAY



RTR-97L




RTR-107L

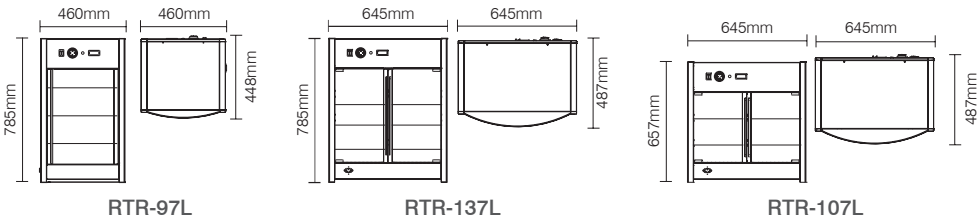

Model	RTR-97L	RTR-137L	RTR-107L
Capacity-Gross	97L	137L	107L
Temperature range	30-90°C (86-194 °F)	30-90°C (86-194 °F)	30-90°C (86-194 °F)
Rated Input Power	800W	1100W	1000W
N.W.	22kg(48.5lbs)	27kg(59.5lbs)	22.5kg(49.6lbs)
G.W.	24kg(52.9lbs)	29kg(63.9lbs)	24.5kg(54.0lbs)
Overall Dimension	460×448×785mm	645×487×785mm	645×487×657mm
Overall Dimension	18.1×17.6×30.9inch	25.4×19.2×30.9inch	25.4×19.2×25.9inch
Package Dimmension	534×537×833mm	719×537×833mm	719×537×705mm
Package Dimmension	21.0×21.1×32.8inch	28.3×21.1×32.8inch	28.3×21.1×27.8inch
20' Container	80	68	102
40' Container	168	138	207
40' Container (high)	252	207	207

HOT SHOWCASE
HOT DISPLAY



RTR-96L/136L/186L

Standard Features

- Brilliant Internal LED illumination on top
- Adjustable temperature controller
- Temperature display
- Adjustable chrome plated shelves
- Front and back sliding doors



RTR-136L




RTR-96L

HOT DISPLAY

RTR-76L

Standard Features


- Brilliant Internal LED illumination on top
- Adjustable temperature controller
- Temperature display
- Adjustable chrome plated shelves
- Back hinge door



RTR-76L



RTR-186L

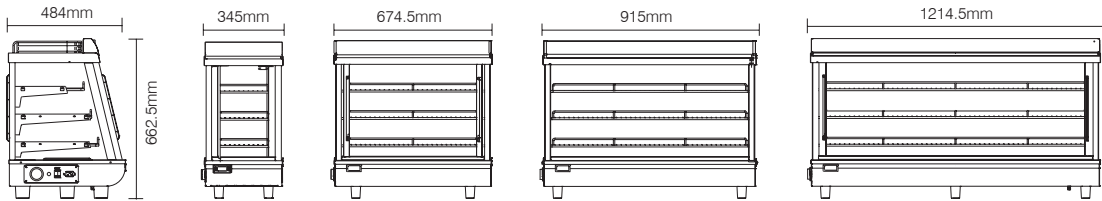

RTR-76L

RTR-96L


RTR-136L

RTR-186L

Model	RTR-76L	RTR-96L	RTR-136L	RTR-186L
Capacity-Gross	76L	96L	136L	186L
Temperature range	30-90°C (86-194 °F)	30-90°C (86-194 °F)	30-90°C (86-194 °F)	30-90°C (86-194 °F)
Rated Input Power	800W	1000W	1100W	1800W
N.W.	21.2kg(46.7lbs)	33.5kg(73.9lbs)	41.5kg(91.5lbs)	53.5kg(117.9lbs)
G.W.	23kg(50.7lbs)	36kg(79.4lbs)	43.5kg(95.9lbs)	59kg(130.1lbs)
Overall Dimension	345×484×662.5mm	674.5×484×662.5mm	915×484×662.5mm	1214.5×484×662.5mm
Overall Dimension	13.6×19.1×26.1inch	26.6×19.1×26.1inch	36.0×19.1×26.1inch	47.8×19.1×26.1inch
Package Dimmension	408×551×710mm	734×551×710mm	974×551×710mm	1274×551×710mm
Package Dimmension	16.1×21.7×28.0inch	28.9×21.7×28.0inch	38.3×21.7×28.0inch	50.2×21.7×28.0inch
20' Container	174	93	66	51
40' Container	357	189	144	108
40' Container (high)	357	189	144	108


HOT SHOWCASE
HOT DISPLAY

RTR-25L
Standard Features
Adjustable temperature controller
Non-adjustable chrome plated shelves
Stainless steel
1 hinge door




RTR-25L

RTR-45L
Standard Features
Adjustable temperature controller
Non-adjustable chrome plated shelves
Stainless steel
2 hinge doors



RTR-45L

RTR-35L
Standard Features
Adjustable temperature controller
Non-adjustable chrome plated shelves
Stainless steel
2 front and back hinge doors




RTR-35L

Model	RTR-25L	RTR-45L	RTR-35L
Capacity-Gross	25L	45L	35L
Temperature range	30-90°C (86-194 °F)	30-90°C (86-194 °F)	30-90°C (86-194 °F)
Rated Input Power	800W	800W	800W
N.W.	12.4kg(27.3lbs)	14.4kg(31.7lbs)	11.8kg(26.0lbs)
G.W.	14kg(30.9lbs)	16.5kg(36.4lbs)	13.5kg(29.8lbs)
Overall Dimension	554×376×311mm	554×376×376mm	554×361×311mm
Overall Dimension	21.8×14.8×12.2inch	21.8×14.8×14.8inch	21.8×14.2×12.2inch
Package Dimmension	624×457×362mm	624×457×427mm	624×442×362mm
Package Dimmension	24.6×18.0×14.3inch	24.6×18.0×16.8inch	24.6×17.4×14.3inch
20' Container	276	230	288
40' Container	570	475	582
40' Container (high)	665	570	679


HOT DISPLAY

RTR-50L
Standard Features
Adjustable temperature controller
Non-adjustable chrome plated shelves
Stainless steel
4 front and back hinge doors




RTR-50L

RTR-80L
Standard Features
Brilliant Internal LED illumination on sides
Adjustable temperature controller
Non-adjustable chrome plated shelves
Stainless steel
4 front and back hinge doors

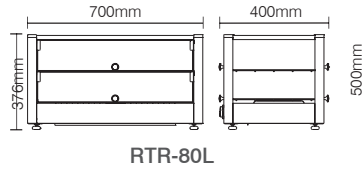

RTR-80L

RTR-115L
Standard Features
Brilliant Internal LED illumination on sides
Adjustable temperature controller
Non-adjustable chrome plated shelves
Stainless steel
6 front and back hinge doors



RTR-115L

Model	RTR-50L	RTR-80L	RTR-115L
Capacity-Gross	50L	80L	115L
Temperature range	30-90°C (86-194 °F)	30-90°C (86-194 °F)	30-90°C (86-194 °F)
Rated Input Power	800W	1000W	1250W
N.W.	13.7kg(30.2lbs)	16.4kg(36.2lbs)	19.7kg(43.4lbs)
G.W.	15.4kg(34.0lbs)	18.5kg(40.8lbs)	22.2kg(48.9lbs)
Overall Dimension	554×361×376mm	700×400×376mm	700×400×500mm
Overall Dimension	21.8×14.2×14.8inch	27.6×15.7×14.8inch	27.6×15.7×19.7inch
Package Dimmension	624×442×427mm	768×482×422mm	768×482×548mm
Package Dimmension	24.6×17.4×16.8inch	30.2×19.0×16.6inch	30.2×19.0×21.6inch
20' Container	240	180	144
40' Container	485	360	288
40' Container (high)	582	432	288

HOT SHOWCASE
HOT DISPLAY

RTR3/RTR4/ RTR5/ RTR6/ RTR8/ RTR9
Standard Features

- Adjustable temperature controller
- Stainless steel
- Front curved glass
- Back doors
- GN pan can be ordered




RTR8



HOT DISPLAY



RTR4

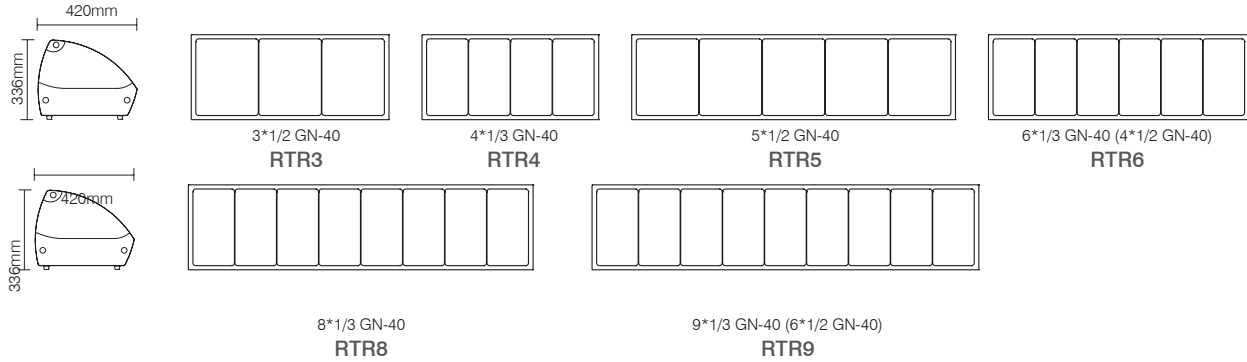

Model	RTR3	RTR4	RTR5
Capacity-Gross	51L	46L	85L
Temperature range	30-90°C (86-194 °F)	30-90°C (86-194 °F)	30-90°C (86-194 °F)
Rated Input Power	500W	500W	1000W
N.W.	18kg(39.7lbs)	16kg(35.3lbs)	25kg(55.1lbs)
G.W.	20kg(44.1lbs)	18kg(39.7lbs)	28kg(61.7lbs)
Overall Dimension	862×420×336mm	773×420×336mm	1394×420×336mm
Overall Dimension	33.9×16.5×13.2inch	30.4×16.5×13.2inch	54.9×16.5×13.2inch
Package Dimmension	908×480×380mm	819×480×380mm	1440×480×380mm
Package Dimmension	35.7×18.9×15.0inch	32.2×18.9×15.0inch	56.7×18.9×15.0inch
20' Container	180	198	96
40' Container	360	396	192
40' Container (high)	420	462	224

Model	RTR6	RTR8	RTR9
Capacity-Gross	68L	90L	100L
Temperature range	30-90°C (86-194 °F)	30-90°C (86-194 °F)	30-90°C (86-194 °F)
Rated Input Power	800W	1000W	1000W
N.W.	22kg(48.5lbs)	27kg(59.5lbs)	29kg(63.9lbs)
G.W.	24kg(52.9lbs)	30kg(66.1lbs)	32kg(70.5lbs)
Overall Dimension	1127×420×336mm	1483×420×336mm	1661×420×336mm
Overall Dimension	44.4×16.5×13.2inch	58.4×16.5×13.2inch	65.4×16.5×13.2inch
Package Dimmension	1173×480×380mm	1529×480×380mm	1707×480×380mm
Package Dimmension	46.2×18.9×15.0inch	60.2×18.9×15.0inch	67.2×18.9×15.0inch
20' Container	144	90	90
40' Container	288	186	180
40' Container (high)	336	217	210

HOT SHOWCASE
HOT DISPLAY

RTR3-3/RTR4-3/ RTR5-3/ RTR6-3/RTR8-3/RTR9-3

Standard Features


- Adjustable temperature controller
- Stainless steel
- Front curved glass
- GN pan can be ordered
- Without back doors



RTR6-3



HOT DISPLAY

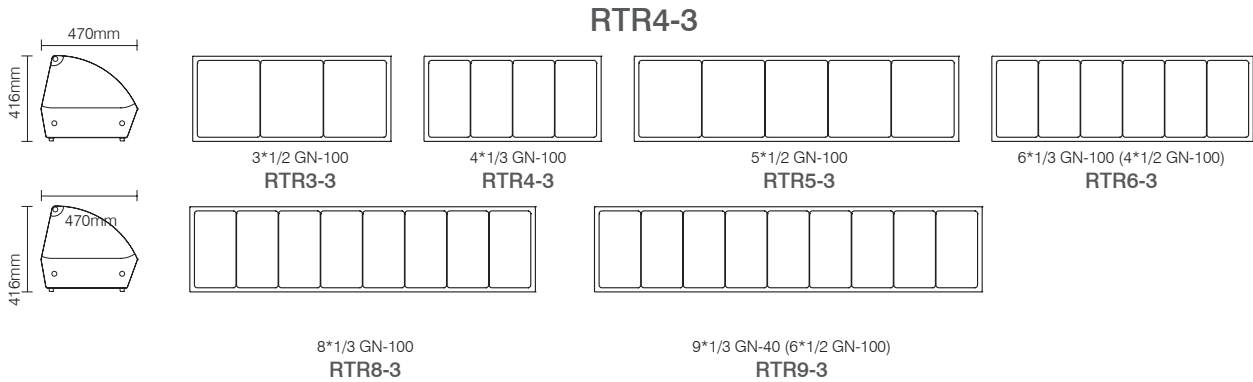

Model	RTR3-3	RTR4-3	RTR5-3
Capacity-Gross	84L	74L	136L
Temperature range	30-90°C (86-194 °F)	30-90°C (86-194 °F)	30-90°C (86-194 °F)
Rated Input Power	550W	500W	900W
N.W.	20kg(44.1lbs)	18kg(39.7lbs)	28kg(61.7lbs)
G.W.	22kg(48.5lbs)	20kg(44.1lbs)	31kg(68.3lbs)
Overall Dimension	862×470×416mm	773×470×416mm	1394×470×416mm
Overall Dimension	33.9×18.5×16.4inch	30.4×18.5×16.4inch	54.9×18.5×16.4inch
Package Dimmension	908×530×460mm	819×530×460mm	1440×530×460mm
Package Dimmension	35.7×20.9×18.1inch	32.2×20.9×18.1inch	56.7×20.9×18.1inch
20' Container	120	145	80
40' Container	280	290	160
40' Container (high)	280	290	160


Model	RTR6-3	RTR8-3	RTR9-3
Capacity-Gross	110L	145L	165L
Temperature range	30-90°C (86-194 °F)	30-90°C (86-194 °F)	30-90°C (86-194 °F)
Rated Input Power	750W	1000W	1050W
N.W.	25kg(55.1lbs)	30kg(66.1lbs)	32kg(70.5lbs)
G.W.	28kg(61.7lbs)	34kg(75.0lbs)	36kg(79.4lbs)
Overall Dimension	1127×470×416mm	1483×470×416mm	1661×470×416mm
Overall Dimension	44.4×18.5×16.4inch	58.4×18.5×16.4inch	65.4×18.5×16.4inch
Package Dimmension	1173×530×460mm	1527×530×460mm	1707×530×460mm
Package Dimmension	46.2×20.9×18.1inch	60.1×20.9×18.1inch	67.2×20.9×18.1inch
20' Container	110	70	80
40' Container	220	150	140
40' Container (high)	220	150	140

HOT SHOWCASE
HOT DISPLAY

RTR-158L
Standard Features
Brilliant Internal LED illumination on sides
Digital temperature controller and display
Rotational chrome plated shelves
Adjustable humidity and heat controls



RTR-158L

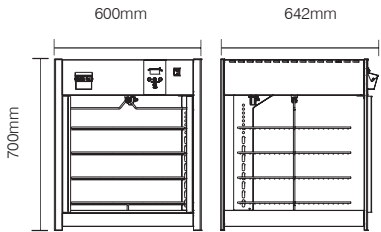

RTR-158L

Model	RTR-158L
Capacity-Gross	158L
Temperature range	30-90°C (86-194 °F)
Rated Input Power	1750W
N.W.	32kg(70.5lbs)
G.W.	34.5kg(76.1lbs)
Overall Dimension	600×642×700mm
Overall Dimension	23.6×25.3×27.6inch
Package Dimmension	698×698×750mm
Package Dimmension	27.5×27.5×29.5inch
20' Container	72
40' Container	144
40' Container (high)	144

HOT DISPLAY

RTR-159L-P/420L-P
Standard Features
Temperature display
Mechanical Temp Control
Mechanical Humidity Control
2 heating ways either by water or air
Ventilated heating system
4 Casters, 2 with brakes
Insulated Body




RTR-159L-P & RTR-420L-P

Model	RTR-159L	RTR-159L-P	RTR-420L	RTR-420L-P
Capacity-Gross	159L	159L	420L	420L
Temperature range	30-75°C (86-167 °F)	30-75°C (86-167 °F)	30-75°C (86-167 °F)	30-75°C (86-167 °F)
Rated Input Power	1700W	1700W	1700W	1700W
N.W.	45kg(99.2lbs)	57kg(125.7lbs)	58kg(127.9lbs)	77kg(169.8lbs)
G.W.	54kg(119lbs)	66kg(145.5lbs)	68kg(149.9lbs)	87kg(191.8lbs)
Overall Dimension	798×536×822mm	798×536×822mm	798×536×1722mm	798×536×1722mm
Overall Dimension	21.4×21.1×32.4inch	21.4×21.1×32.4inch	21.4×21.1×67.8inch	21.4×21.1×67.8inch
Package Dimmension	1000×650×860mm	1000×650×860mm	1000×650×1760mm	1000×650×1760mm
Package Dimmension	39.4×25.6×33.9inch	39.4×25.6×33.9inch	39.4×25.6×69.3inch	39.4×25.6×69.3inch
20' Container	19	19	19	19
40' Container	80	80	40	40
40' Container (high)	120	120	40	40

RTR-159L/420L
Standard Features
Temperature display
Mechanical Temp Control
Mechanical Humidity Control
2 heating ways either by water
Ventilated heating system
4 Casters, 2 with brakes



RTR-159L & RTR-420L

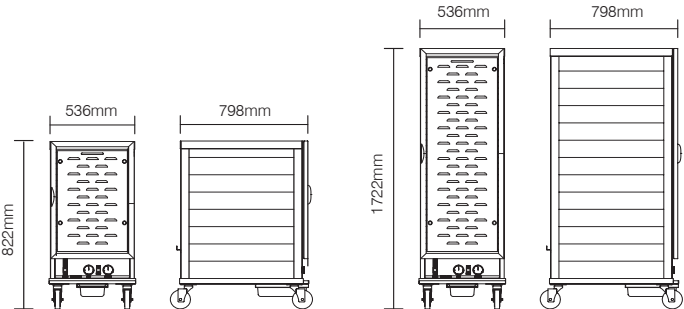

RTR-159L & RTR-159L-P

RTR-420L & RTR-420L-P

HOT SHOWCASE
HOT DISPLAY



LED lights




Temperature
Controller




Castors

RTR-180L/220L
Standard Features

Brilliant Internal LED illumination
Digital temperature controller and display
Adjustable shelves
4 Castors with 2 brakes
Stainless steel



RTR-180L



RTR-220L

RTR-180L & RTR-220L

Model	RTR-180L	RTR-220L
Capacity-Gross	180L	220L
Temperature range	30-80°C (86-176 °F)	30-80°C (86-176 °F)
Rated Input Power	2000W	2000W
N.W.	57kg(125.7lbs)	67kg(147.7lbs)
G.W.	66kg(145.5lbs)	77.5kg(170.9lbs)
Overall Dimension	494×600×1450mm	494×600×1742mm
Overall Dimension	19.4×23.6×57.1inch	19.4×23.6×68.6inch
Package Dimmension	565×670×1610mm	565×670×1900mm
Package Dimmension	22.2×26.4×63.4inch	22.2×26.4×74.8inch
20' Container	33	30
40' Container	69	62
40' Container (high)	69	62


HOT DISPLAY

RTR-650L
Standard Features


Brilliant Internal illumination on sides
Digital temperature controller and display
Adjustable shelves
Adjustable feet
Front sliding door and back hinge doors
Stainless steel



RTR-650L



RTR-650L-2



RTR-650L



RTR-650L-2

RTR-650L-2
Standard Features

Brilliant Internal illumination on sides
Digital temperature controller and display
Adjustable shelves
Front sliding door and back hinge doors
Stainless steel
4 Castors with 2 brakes


Model	RTR-650L	RTR-650L-2
Capacity-Gross	650L	600L
Temperature range	30-70°C (86-158 °F)	30-60°C (86-140 °F)
Rated Input Power	1700W	2000W
N.W.	82kg(180.8lbs)	86kg(189.6lbs)
G.W.	95kg(209.4lbs)	100kg(220.5lbs)
Overall Dimension	720×620×2000mm	720×620×2022mm
Overall Dimension	28.3×24.4×78.7inch	28.3×24.4×79.6inch
Package Dimmension	770×670×2165mm	770×670×2187mm
Package Dimmension	30.3×26.4×85.2inch	30.3×26.4×86.1inch
20' Container	20	20
40' Container	42	42
40' Container (high)	42	42

HOT SHOWCASE

HOT DISPLAY

Standard Features



- Black frosted outer body
- Tempered glass sides
- Independent heat & light controls for each shelf
- Adjustable thermostat
- Adjustable divider rods for easy organization of food product
- Fixed rubber feet



RTR-121D



HOT DISPLAY

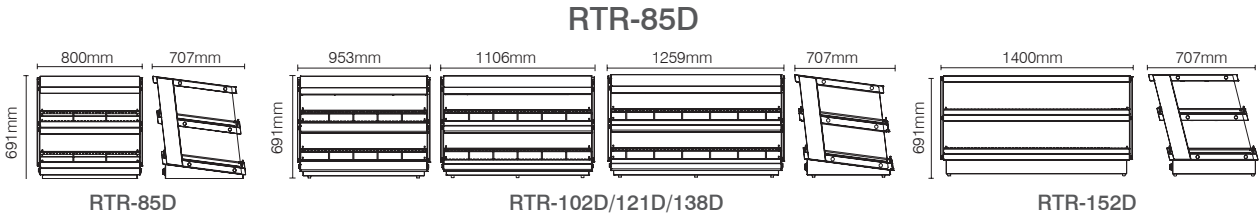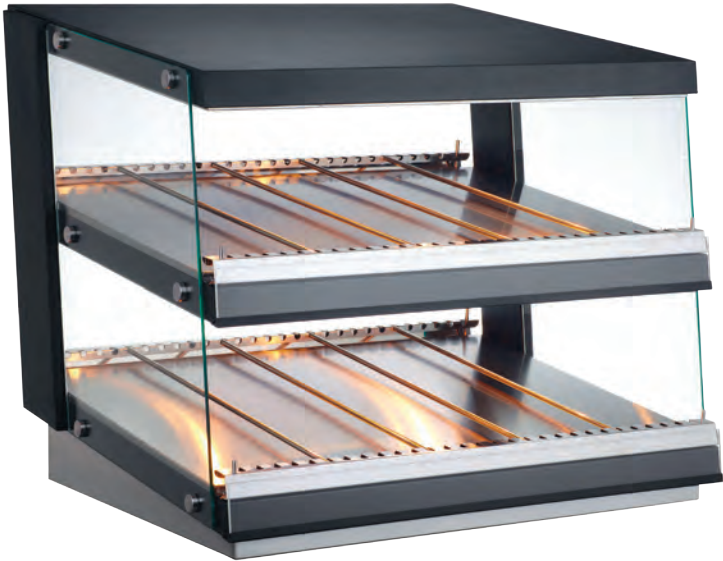


Model	RTR-85D	RTR-102D
Display Area	0.85m ²	1.02m ²
Temperature range	30-85°C (86-185 °F)	30-85°C (86-185 °F)
Rated Input Power	1160W	1160W
N.W.	41kg(90.4lbs)	49kg(108.0lbs)
G.W.	44kg(97.0lbs)	52kg(114.6lbs)
Overall Dimension	800×707×691mm	953×707×691mm
Overall Dimension	31.5×27.8×27.2inch	37.5×27.8×27.2inch
Package Dimmension	866×767×736mm	1019×767×736mm
Package Dimmension	34.1×30.2×29.0inch	40.1×30.2×29.0inch
20' Container	57	51
40' Container	117	102
40' Container (high)	117	102

Model	RTR-121D	RTR-138D	RTR-152D
Display Area	1.21m ²	1.38m ²	1.52m ²
Temperature range	30-85°C (86-185 °F)	30-85°C (86-185 °F)	30-85°C (86-185 °F)
Rated Input Power	1860W	1860W	2200W
N.W.	55kg(121.3lbs)	65kg(143.3lbs)	74kg(163.1lbs)
G.W.	58kg(127.9lbs)	68kg(149.9lbs)	78kg(172.0lbs)
Overall Dimension	1106×707×691mm	1259×707×691mm	1400×707×691mm
Overall Dimension	43.5×27.8×27.2inch	49.6×27.8×27.2inch	55.1×27.8×27.2inch
Package Dimmension	1172×767×736mm	1325×767×736mm	1486×860×705mm
Package Dimmension	46.1×30.2×29.0inch	52.2×30.2×29.0inch	58.5×33.9×27.8inch
20' Container	49	36	27
40' Container	90	75	60
40' Container (high)	90	75	60

HOT SHOWCASE

HOT DISPLAY

RTR-1D/RTR-2D
Standard Features
 Brilliant Internal illumination on sides
 Adjustable temperature controller
 Non-adjustable shelf
 Fixed rubber feet
 Stainless steel




RTR-1D



RTR-2D

HOT DISPLAY

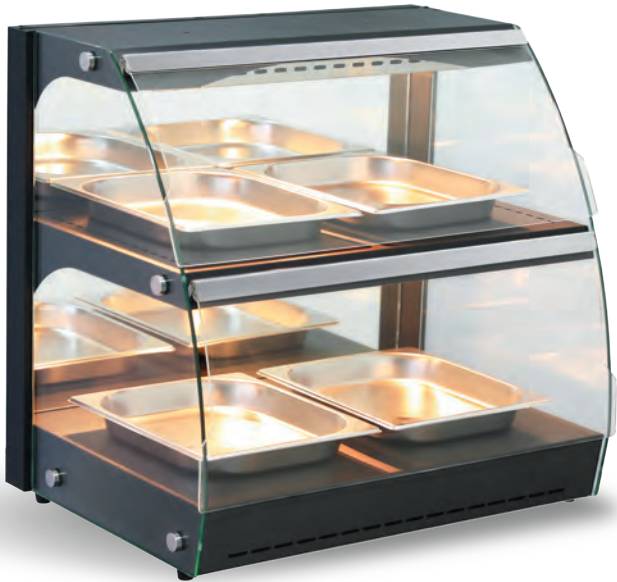


RTR-2D-2

RTR-2D-2
Standard Features
 Brilliant Internal illumination on sides
 Adjustable temperature controller
 Non-adjustable shelf
 Fixed rubber feet
 Stainless steel
 Front Acrylic hinge door



RTR-3D

RTR-3D
Standard Features
 Brilliant Internal illumination on sides
 Adjustable temperature controller
 Non-adjustable shelf
 Fixed rubber feet
 Stainless steel
 Sliding doors

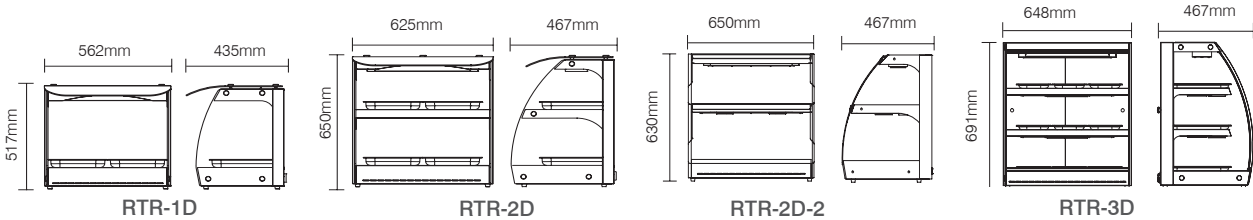

Model	RTR-1D	RTR-2D	RTR-2D-2	RTR-3D
Display Area	0.2m ²	0.48m ²	0.5m ²	145L(Capacity-Gross)
Temperature range	30-85°C (86-185 °F)	30-85°C (86-185 °F)	30-85°C (86-185 °F)	30-90°C (86-194 °F)
Rated Input Power	550W	560W	560W	1160W
N.W.	18.1kg(39.9lbs)	25.6kg(56.4lbs)	26.5kg(58.4lbs)	32kg(70.5lbs)
G.W.	20.5kg(45.2lbs)	28kg(61.7lbs)	28.5kg(62.8lbs)	35kg(77.2lbs)
Overall Dimension	562×435×517mm	625×467×650mm	650×467×630mm	648×467×691mm
Overall Dimension	22.1×17.1×20.4inch	24.6×18.4×25.6inch	25.6×18.4×24.8inch	25.5×18.4×27.2inch
Package Dimmension	625×505×600mm	690×535×700mm	715×535×680mm	719×537×755mm
Package Dimmension	24.6×19.9×23.6inch	27.2×21.1×27.6inch	28.1×21.1×26.8inch	28.1×21.1×29.7inch
20' Container	160	108	102	102
40' Container	328	219	207	207
40' Container (high)	328	219	207	207

HOT SHOWCASE

HOT DISPLAY



RTR-59L-2 & RT-79L-2



RT-59L & RTR-79L



HOT DISPLAY


RTR-59L/59L-2/79L/79L-2
Mini display warming showcase

Mini display warming showcase is the perfect choice of preserving cookies,snacks,wrapped or boxed sandwiches, or other non-humidity products. The circulation of hot air in the mini displaywarmin showcase keeps the food in a safe temperature range. The volume of warming showcase is small, it does not occupy muchspace, and it can displayfood at breakfast, lunch and supper time.

- Food can be displayed by magnetic alloy movable frame horizontally or tipsily.
- Tempered glass and warm light can be perfect to displa your food
- Thermostatical control
- Gates can be installed at any of the four sides



Options: Adjustable chrome plated shelves

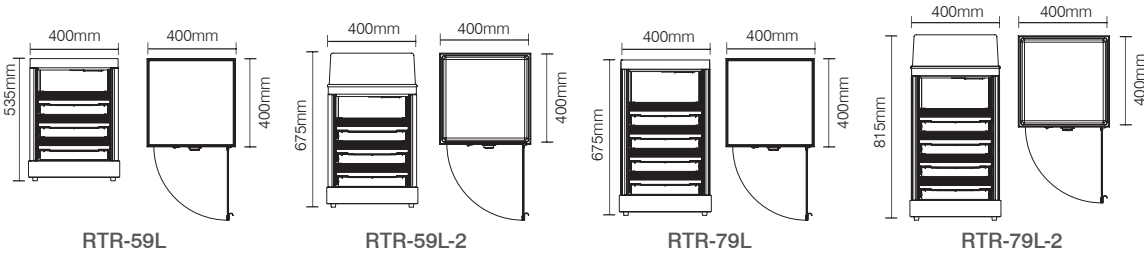

Model	RTR-59L	RTR-59L-2	RTR-79L	RTR-79L-2
Capacity-Gross	59L	59L	79L	79L
Temperature range	30-85°C (86-185 °F)	30-85°C (86-185 °F)	30-85°C (86-185 °F)	30-85°C (86-185 °F)
Rated Input Power	400W	400W	400W	400W
N.W.	20.5kg(45.2lbs)	21.5kg(47.4lbs)	23kg(50.7lbs)	24kg(52.9lbs)
G.W.	22.5kg(49.6lbs)	23.5kg(51.8lbs)	25kg(55.1lbs)	26kg(57.3lbs)
Overall Dimension	400×400×535mm	400×400×675mm	400×400×675mm	400×400×815mm
Overall Dimension	15.7×15.7×21.1inch	15.7×15.7×26.6inch	15.7×15.7×26.6inch	15.7×15.7×32.1inch
Package Dimmension	490×460×580mm	490×460×720mm	490×460×720mm	490×460×860mm
Package Dimmension	19.3×18.1×22.8inch	19.3×18.1×28.3inch	19.3×18.1×28.3inch	19.3×18.1×33.9inch
20' Container	192	180	180	120
40' Container	384	360	360	240
40' Container (high)	384	360	360	360

HOT SHOWCASE HOT DISPLAY



RTR-40D

RTR-40D/RTR-40D-2 Standard Features

The color of side glasses will be changed between red, blue, green,cyan automatically - caused by LED lighting
Adjustable temperature controller
Single tempered glass
Stainless steel
Fixed rubber feet



RTR-40D-2



RTR-40D-1

RTR-40D-1 Standard Features

The color of side glasses will be changed between red, blue, green,cyan automatically - caused by LED lighting
Individual touchscreen for each layer
Single tempered glass
Stainless steel
Fixed rubber feet

HOT DISPLAY



Red




Blue



Green



Cyan

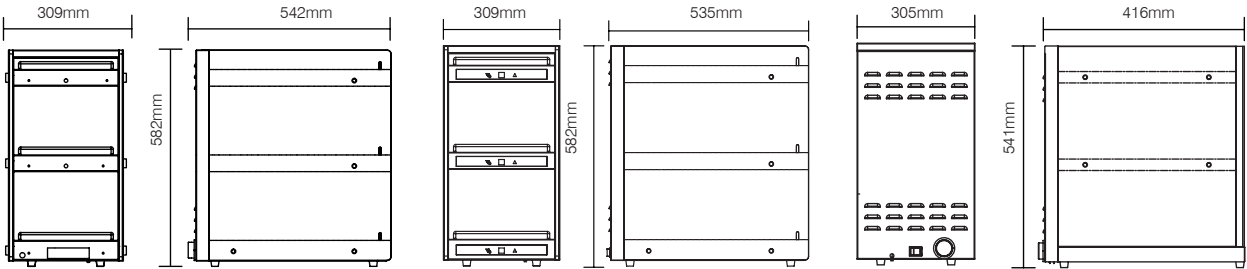

RTR-40D

RTR-40D-1

RTR-40D-2

Model	RTR-40D	RTR-40D-1	RTR-40D-2
Display Area	0.4m ²	0.4m ²	0.4m ²
Temperature range	30-60°C (86-140 °F)	30-60°C (86-140 °F)	30-60°C (86-140 °F)
Rated Input Power	300W	300W	300W
N.W.	29.5kg(65.0lbs)	29.5kg(65.0lbs)	14kg(30.9lbs)
G.W.	32.5kg(71.7lbs)	32.5kg(71.7lbs)	16.8kg(37.0lbs)
Overall Dimension	542×309×582mm	535×309×582mm	416×305×541mm
Overall Dimension	21.3×12.2×22.9inch	21.1×12.2×22.9inch	16.4×12.0×21.3inch
Package Dimmension	617×391×650mm	617×391×650mm	487×382×608.5mm
Package Dimmension	24.3×15.4×25.6inch	24.3×15.4×25.6inch	19.2×15.0×24.0inch
20' Container	147	147	147
40' Container	300	300	300
40' Container (high)	400	400	400

HOT SHOWCASE
HOT DISPLAY

RTR-75L
Standard Features
Brilliant Internal LED illumination on top
Digital temperature controller and display
3 glass shelves
Adjustable temperature controller
Fixed rubber feet
Tempered glass



RTR-75L

RTR-325L
Standard Features
Brilliant Internal LED illumination on sides
Digital temperature controller and display
Adjustable humidity and heat controls



RTR-325L



HOT DISPLAY


RTR-205L / RTR-318L
Standard Features
Brilliant Internal illumination on sides
Digital temperature controller and display
Adjustable humidity and heat controls
Fixed rubber feet
Drawer type Heating parts



RTR-205L



RTR-318L

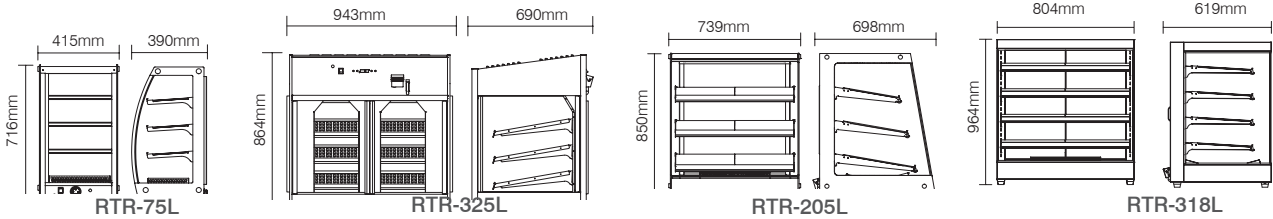

Model	RTR-75L	RTR-325L	RTR-205L	RTR-318L
Capacity-Gross	75L	325L	205L	318L
Temperature range	30-70°C (86-158 °F)	30-85°C (86-185 °F)	30-80°C (86-176 °F)	30-80°C (86-176 °F)
Rated Input Power	500W	2900W	1400W	1400W
N.W.	22kg(48.5lbs)	70kg(154.3lbs)	64.5kg(142.2lbs)	74.5kg(164.2lbs)
G.W.	24kg(52.9lbs)	74kg(163.1lbs)	67kg(147.7lbs)	77.5kg(170.9lbs)
Overall Dimension	415×390×716mm	943×690×864mm	739×698×850mm	804×619×964mm
Overall Dimension	16.3×15.4×28.2inch	37.1×27.2×34.0inch	29.1×27.5×33.5inch	31.7×24.4×38inch
Package Dimmension	460×440×825mm	1030×770×900mm	807×766×897mm	860×670×1025mm
Package Dimmension	18.1×17.3×32.5inch	40.6×30.3×34.4inch	31.8×30.2×35.3inch	33.9×26.4×40.4inch
20' Container	130	32	42	40
40' Container	260	66	86	86
40' Container (high)	360	66	86	86

HOT SHOWCASE

HOT DISPLAY

LT-01

Portable Display Warming Plate For Buffet

The portable display warming plate for buffet keep the prepared food in the right temperature without affecting the quality. They are the perfect choice for the self-service area and the customer service area.

- Keep food in a safe supply temperature.
- The bottom of the equipment is controlled by constant temperature device, and the device is with digital temperature indication.
- The top of LT-01 type is equipped with the halogen lamp which emits heat and lighting, and the halogen lamp is controlled by the standard toggle switch.
- LT-01 contains a 1:1 size food dish of 64mm high
- It is equipped with removable apparatus plate which is easy to clean
- All models have a wire of 1829mm (72') long and a plug
- It is equipped with a transparent glass dust cover
- LT-01 with a single transparent glass dust cover with food plate as accessory



LT-03

Infrared Thermal Insulation Station

- The color will be black if the color is not designated.
- LT-03 infrared thermal insulation station, black, with light and food dish

Model	LT-01	LT-03
Capacity-Gross	1*1/1 GN 65mm deep	26L
Temperature range	30-90°C (86-194 °F)	50°C (122 °F)
Rated Input Power	800W	530W
N.W.	27kg(59.5lbs)	9kg(19.8lbs)
G.W.	30kg(66.1lbs)	11kg(24.3lbs)
Overall Dimension	825×660×580mm	641×330×448mm
Overall Dimension	32.5×26.0×22.8inch	25.2×13.0×17.6inch
Package Dimmension	894×760×648mm	660×235×385mm
Package Dimmension	35.2×29.9×25.5inch	26.0×9.3×15.2inch
20' Container	54	516
40' Container	117	1056
40' Container (high)	117	1233



LT-03

ODIS

HOT DISPLAY

RTR-520L/520L-1

Product features

- C/F can be freely switched.
- Wide temp range can be adjusted from 30-90°C
- Timing accurately and long from 0-100 hours
- Reminder function when working time is over
- Higher quality stainless steel, easy to clean and durable use.
- Digital control with digital display
- Using heating film, heat food uniformly and fast. Save energy consumption
- Independent thermostat each layer
- Automatic heating
- Heat dissipation fan
- ATC heating film




High temperature resistant pan



RTR-520L-1



RTR-520L

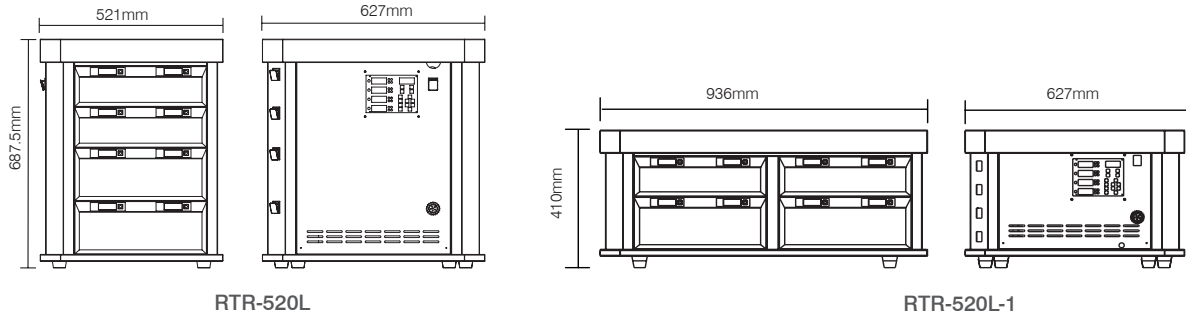

Model	RTR-520L	RTR-520L-1
Capacity-Gross	Four heating channels	Four heating channels
Temperature range	30-100°C (86-212 °F)	30-100°C (86-212 °F)
Rated Input Power	3000W	3000W
N.W.	78.5kg(173.1lbs)	82.5kg(181.9lbs)
G.W.	90kg(198.4lbs)	100kg(220.5lbs)
Overall Dimension	627×521×687.5mm	936×627×410mm
Overall Dimension	24.7×20.5×27.1inch	36.9×24.7×16.1inch
Package Dimmension	713×607×847mm	1022×713×569mm
Package Dimmension	28.1×23.9×33.3dinch	40.2×28.1×22.4inch
20' Container	48	80
40' Container	96	164
40' Container (high)	144	164

HOT SHOWCASE
HOT DISPLAY



LT-04
Product features

- Warm lamp shell made of aluminum alloy, beautiful to look and easy to clean.
- A variety of combinations and specifications of warm lamps for selection.
- To provide general installation lifting plate, other installation also available.
- Controllable heating power to ensure food safety.
- Simple operation, easy cleanliness.





Model	LT-0401	LT-0402	LT-0403	LT-0404
Temperature range	30-75℃ (86-167 ℉)	30-75℃ (86-167 ℉)	30-75℃ (86-167 ℉)	30-75℃ (86-167 ℉)
Rated Input Power	500W	1000W	1100W	1400W
N.W.	3.5kg(7.7lbs)	5.5kg(12.1lbs)	6kg(13.2lbs)	7.5kg(16.5lbs)
G.W.	5.5kg(12.1lbs)	7.5kg(16.5lbs)	8kg(17.6lbs)	10kg(22.0lbs)
Overall Dimension	600×166×70mm	1000×166×70mm	1200×166×70mm	1500×166×70mm
Overall Dimension	23.6×6.5×2.8inch	39.4×6.5×2.8inch	47.2×6.5×2.8inch	59.1×6.5×2.8inch
Package Dimmension	710×206×110mm	1100×206×110mm	1310×206×110mm	1610×206×110mm
Package Dimmension	28.0×8.1×4.3inch	43.3×8.1×4.3inch	51.6×8.1×4.3inch	63.4×8.1×4.3inch

Model	LT-0405	LT-0406	LT-0407	LT-0408
Temperature range	30-75℃ (86-167 ℉)	30-75℃ (86-167 ℉)	30-75℃ (86-167 ℉)	30-75℃ (86-167 ℉)
Rated Input Power	600W	1200W	1300W	1700W
N.W.	4.5kg(9.9lbs)	8kg(17.6lbs)	9.5kg(20.9lbs)	12kg(26.5lbs)
G.W.	6.5kg(14.3lbs)	10kg(22.0lbs)	11.5kg(25.4lbs)	14.5kg(32.0lbs)
Overall Dimension	600×246×70mm	1000×246×70mm	1200×246×70mm	1500×246×70mm
Overall Dimension	23.6×9.7×2.8inch	39.4×9.7×2.8inch	47.2×9.7×2.8inch	59.1×9.7×2.8inch
Package Dimmension	710×286×110mm	1100×286×110mm	1310×286×110mm	1610×286×110mm
Package Dimmension	28.0×11.3×4.3inch	43.3×11.3×4.3inch	51.6×11.3×4.3inch	63.4×11.3×4.3inch

Model	LT-0409	LT-0410	LT-0411	LT-0412
Temperature range	30-75℃ (86-167 ℉)	30-75℃ (86-167 ℉)	30-75℃ (86-167 ℉)	30-75℃ (86-167 ℉)
Rated Input Power	700W	1400W	1500W	2000W
N.W.	5.5kg(12.1lbs)	10kg(22.0lbs)	11.5kg(25.4lbs)	14kg(30.1lbs)
G.W.	7.5kg(16.5lbs)	12kg(26.5lbs)	13.5kg(29.8lbs)	16.5kg(36.4lbs)
Overall Dimension	600×326×70mm	1000×326×70mm	1200×326×70mm	1500×326×70mm
Overall Dimension	23.6×12.8×2.8inch	39.4×12.8×2.8inch	47.2×12.8×2.8inch	59.1×12.8×2.8inch
Package Dimmension	710×366×110mm	1100×366×110mm	1310×366×110mm	1610×366×110mm
Package Dimmension	28.0×14.4×4.3inch	43.3×14.4×4.3inch	51.6×14.4×4.3inch	63.4×14.4×4.3inch

Model	LT-0413	LT-0414	LT-0415	LT-0416
Temperature range	30-75℃ (86-167 ℉)	30-75℃ (86-167 ℉)	30-75℃ (86-167 ℉)	30-75℃ (86-167 ℉)
Rated Input Power	1100W	2200W	2400W	3100W
N.W.	6.5kg(14.3lbs)	12kg(26.5lbs)	13.5kg(29.8lbs)	16kg(35.3lbs)
G.W.	8.5kg(18.7lbs)	14kg(30.9lbs)	15.5kg(34.2lbs)	18.5kg(40.8lbs)
Overall Dimension	600×396×70mm	1000×396×70mm	1200×396×70mm	1500×396×70mm
Overall Dimension	23.6×15.6×2.8inch	39.4×15.6×2.8inch	47.2×15.6×2.8inch	59.1×15.6×2.8inch
Package Dimmension	710×436×110mm	1100×436×110mm	1310×436×110mm	1610×436×110mm
Package Dimmension	28.0×17.2×4.3inch	43.3×17.2×4.3inch	51.6×17.2×4.3inch	63.4×17.2×4.3inch

LT-0401




HOT DISPLAY



LT-0501

LT-05
Product features

- Heat retaining panel shell made of stainless steel, and heat retaining area made of high borosilicate black glass, which is beautiful and durable.
- A variety of heat retaining panels are available.
- To provide general installation size, marble table top recommended
- Controllable heating power to ensure food safety.
- Simple operation, easy cleanliness.
- For food insulation only, not for food heating or production.

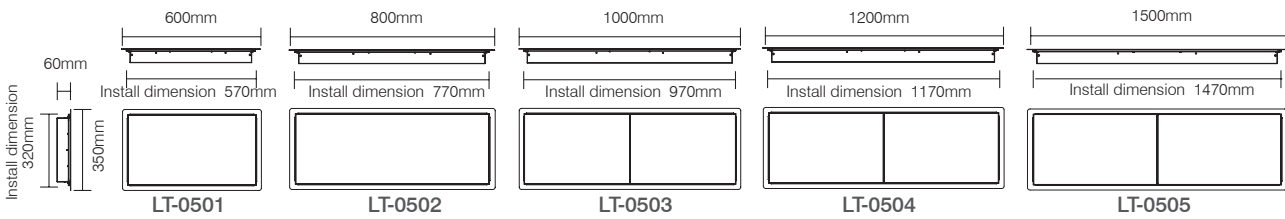

Model	LT-0501	LT-0502	LT-0503	LT-0504	LT-0505
Display Area	0.17m ²	0.23m ²	0.29m ²	0.35m ²	0.44m ²
Temperature range	30-90℃ (86-194 ℉)	30-90℃ (86-194 ℉)	30-90℃ (86-194 ℉)	30-90℃ (86-194 ℉)	30-90℃ (86-194 ℉)
Rated Input Power	300W	375W	480W	600W	750W
N.W.	7kg(15.4lbs)	9kg(19.8lbs)	11kg(24.3lbs)	13kg(28.7lbs)	16kg(35.3lbs)
G.W.	9kg(19.8lbs)	11kg(24.3lbs)	13kg(28.7lbs)	15kg(33.1lbs)	18kg(39.7lbs)
Overall Dimension	600×350×60mm	800×350×60mm	1000×350×60mm	1200×350×60mm	1500×350×60mm
Overall Dimension	23.6×13.8×2.4inch	31.5×13.8×2.4inch	39.4×13.8×2.4inch	47.2×13.8×2.4inch	59.1×13.8×2.4inch
Package Dimmension	830×430×160mm	1030×430×160mm	1230×430×160mm	1430×430×160mm	1730×430×160mm
Package Dimmension	32.7×16.9×6.3inch	40.6×16.9×6.3inch	48.4×16.9×6.3inch	56.3×16.9×6.3inch	68.1×16.9×6.3inch
20' Container	490	406	308	294	224
40' Container	980	854	644	602	462
40' Container (high)	1120	976	720	688	528

DRY CABINET

RTZ-25L

Options:
Wooden base



RTZ-35L

Options:
Wooden base




RTZ-45L

Options:
Wooden base



RTZ-50L

Options:
Wooden base

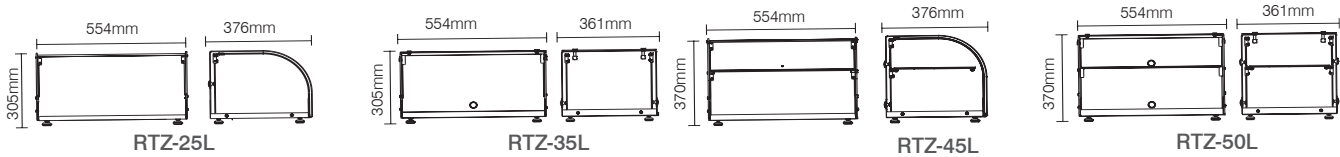

Model	RTZ-25L	RTZ-35L	RTZ-45L	RTZ-50L
Capacity-Gross	25L	35L	45L	50L
N.W.	9kg(19.8lbs)	8.6kg(19.0lbs)	12.5kg(27.6lbs)	11.9kg(26.2lbs)
G.W.	10.5kg(23.1lbs)	10kg(22.0lbs)	14kg(30.9lbs)	13.5kg(29.8lbs)
Overall Dimension	554×376×305mm	554×361×305mm	554×376×370mm	554×361×370mm
Overall Dimension	21.8×14.8×12.0inch	21.8×14.2×12.0inch	21.8×14.8×14.6inch	21.8×14.2×14.6inch
Package Dimmension	624×457×362mm	624×442×362mm	624×457×427mm	624×442×427mm
Package Dimmension	24.6×18.0×14.3inch	24.6×17.4×14.3inch	24.6×18.0×16.8inch	24.6×17.4×16.8inch
20' Container	276	288	230	240
40' Container	570	582	475	485
40' Container (high)	665	679	570	582

DRY CABINET



RTZ-60L



RTZ-70L

RTZ-318L
Standard Features
Adjustable glass shelves
Single tempered glass
Fixed rubber feet
Plastic coating metal


RTZ-75L
Standard Features
Colored LED on top
3 glass shelves
Black stainless steel shell
Tempered glass
Hinged door at back
Bottom drawer for storage



RTZ-75L




RTZ-318L

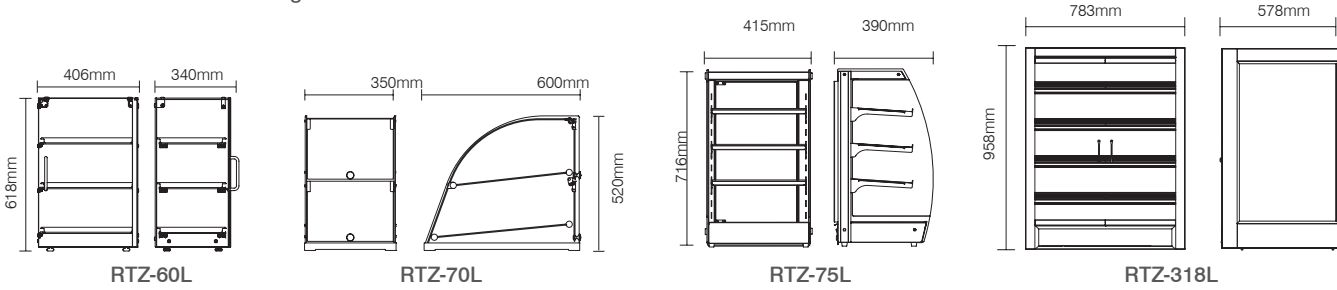


Model	RTZ-60L	RTZ-70L	RTZ-75L	RTZ-318L
Capacity-Gross	60L	70L	75L	318L
N.W.	17kg(37.5lbs)	13kg(28.7lbs)	19.5kg(43.0lbs)	65.5kg(144.4lbs)
G.W.	19kg(41.9lbs)	15kg(33.1lbs)	21.5kg(47.4lbs)	68.5kg(151.0lbs)
Overall Dimension	406×340×618mm	350×600×520mm	415×390×716mm	783×578×958mm
Overall Dimension	16.0×13.4×24.3inch	13.8×23.6×20.5inch	16.3×15.4×28.2inch	30.8×22.8×37.7inch
Package Dimmension	480×400×713mm	650×410×570mm	460×440×825mm	877×663×1035mm
Package Dimmension	18.9×15.7×28.1inch	25.6×16.1×22.4inch	18.1×17.3×32.5inch	34.5×26.1×40.7inch
20' Container	234	200	130	44
40' Container	468	408	260	90
40' Container (high)	624	408	390	90

DRY CABINET

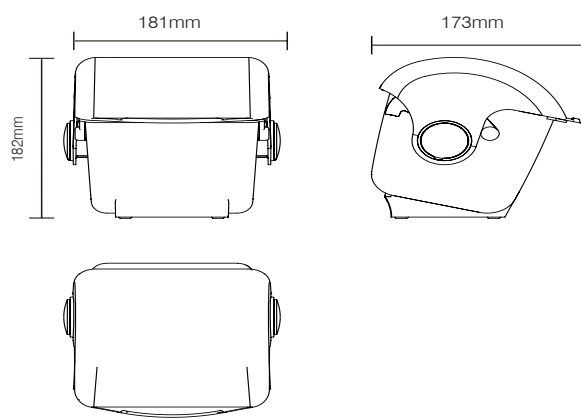

Optional accessories for inner box: 1, 2, etc

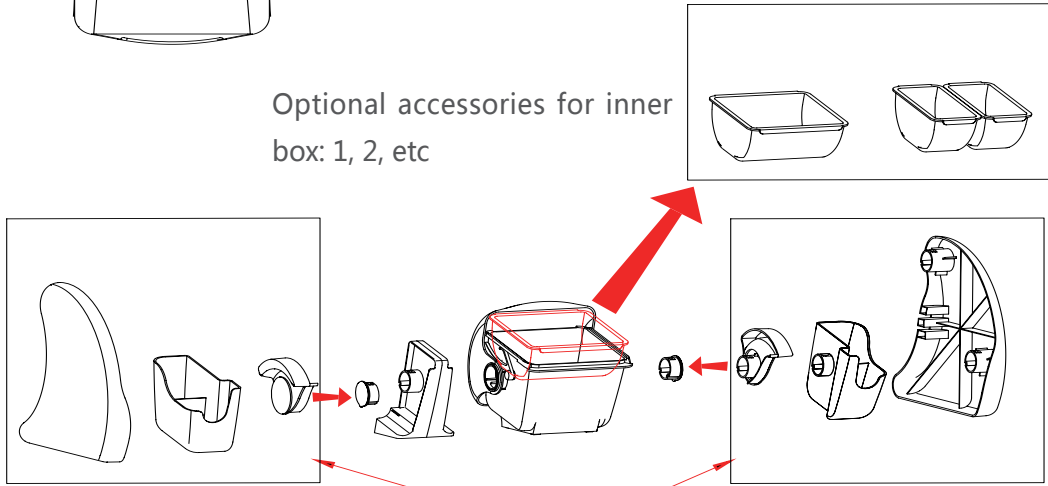


Product features

- Various combinations, simple dismounting, applicable to all places.
- Customers can choose inner match and accessories according to their own needs. When using shallow inner box, ice cubes or ice packs can be placed in the space below the box to maintain food freshness.
- Accessory B has a handle shape for convenient use.
- Accessory C can be used for toothpick, fork, coffee companion, etc.
- Accessory D may fit two separate boxes together up and down.

DRY CABINET

ODIS

RTZ-1

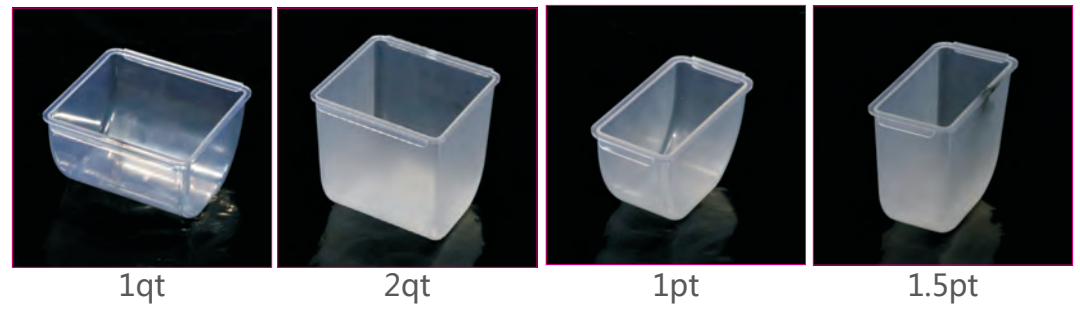


A					
B					
C					
D					
E					

DRY CABINET



Product features

- Various combinations, simple dismounting, applicable to all places.
- Customers can choose inner match and accessories according to their own needs. When using shallow inner box, ice cubes or ice packs can be placed in the space below the box to maintain food freshness.
- Accessory B has a handle shape for convenient use.
- Accessory C can be used for toothpick, fork, coffee companion, etc.
- Accessory D may fit two separate boxes together up and down.

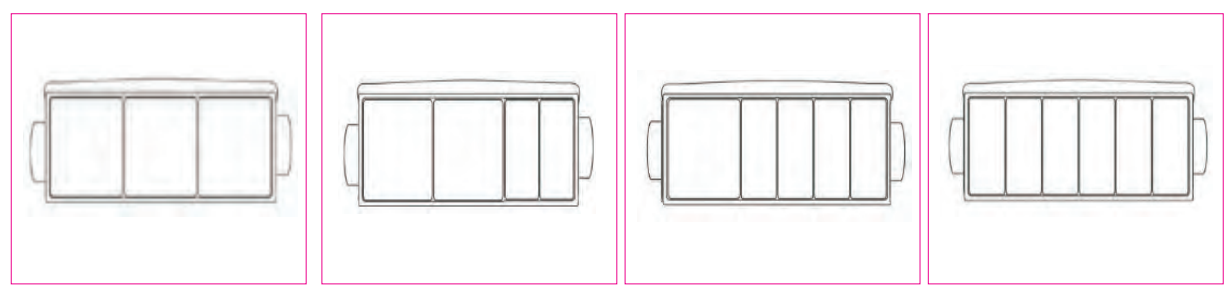


DRY CABINET

ODIS

RTZ-2

Blue frame:
shallow inner box

Black frame:
deep inner box

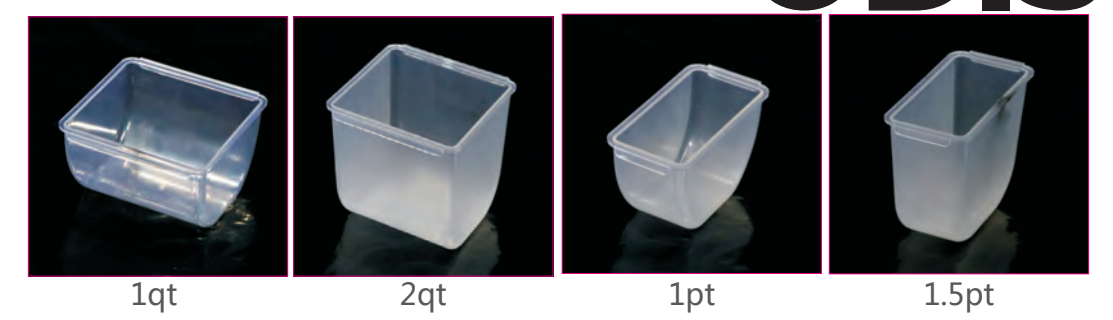

A					
B					
C					
F					

ACCESSORIES

Product Introduction

WIRE TYPE CONDENSER



Wire tube condenser widely used in high cooling performance required large refrigeration product.

Features.


- External installation, good air ventilation property, to ensuring better cooling efficiency in limited space.
- Refrigerant flowing smoothly, helps to reduce the load of compressor, save energy extend operating life.
- It has pretty good dust proof function, and no need to clean up.
- Large volume condensers without any welding points, it can reduce the possibility of tubeline leakage.



Technological Process:

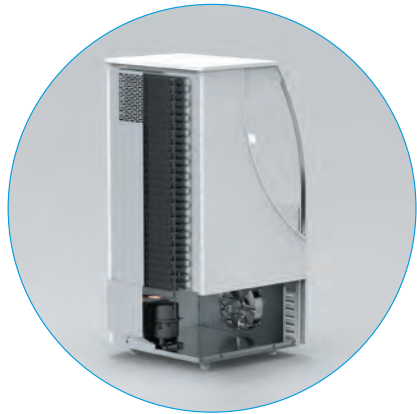


The Length of Tube: 35900mm

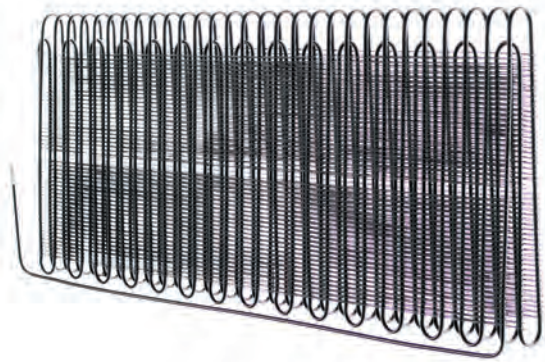


Model	Item Length/ mm	Material	OD	Wall Thickness	Arrangement and distance	System form	Structural Style	Surface Coating	Technical Capacity
ALS-180N ALS-360N	671X400	Bundy Tube	Φ 4.76	0.6	Side by side or stagger of steel wire ≥3.8mm	Passive Cooling	Liechtenstein	Cathode Electrophoresis	According to the customer required or assist in development
			Φ 6	0.65~0.75		Bottom Cooling	Foldaway		
		Steel Wire	Φ 1.2~ Φ 1.3			Strong Cooling	Dual System		



The Length of Tube: 47990mm

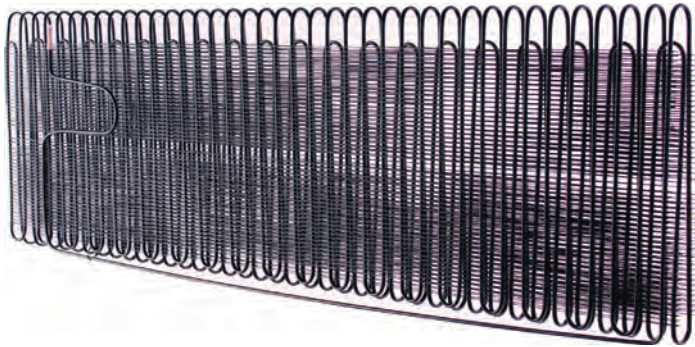

Model	Item Length/ mm	Material	OD	Wall Thickness	Arrangement and distance	System form	Structural Style	Surface Coating	Technical Capacity
ALS-220N	1330X400	Bundy Tube	Φ 4.76	0.65	Side by side or stagger of steel wire ≥3.8mm	Passive Cooling	Liechtenstein	Cathode Electrophoresis	According to the customer required or assist in development
			Φ 6			Bottom Cooling	Foldaway		
		Steel Wire	Φ 1.2~Φ 1.3			Strong Cooling	Dual System		



ALS-220N
The Length of Tube: 16700mm



ALC-160N
The Length of Tube: 20900mm



Model	Item Length/ mm	Material	OD	Wall Thickness	Arrangement and distance	System form	Structural Style	Surface Coating	Technical Capacity
ALC-120N ALC-160N	564X320	Bundy Tube	Φ 4.76	0.6	Side by side or stagger of steel wire ≥3.8mm	Passive Cooling	Liechtenstein	Cathode Electrophoresis	According to the customer required or assist in development
			Φ 6	0.65~0.75		Bottom Cooling	Foldaway		
		Steel Wire	Φ 1.2~Φ 1.3			Strong Cooling	Dual System		



ALC-108N
ITEM LENGTH/mm
160x106



ALC-196N
ITEM LENGTH/mm
231x181



AL-98N-3
ITEM LENGTH/mm
270x220



ALA-100N
ITEM LENGTH/mm
270x220



ALS-103N
ITEM LENGTH/mm
169x161



ALS-132N
ITEM LENGTH/mm
212x220



ALA-100N-2
ITEM LENGTH/mm
270x220



ALA-280N
ITEM LENGTH/mm
270x220



ALC-100R
ITEM LENGTH/mm
236x154



ALA-177N
ITEM LENGTH/mm
425x277



ALA-175N
ITEM LENGTH/mm
405x191



ALA-255N
ITEM LENGTH/mm
358x212



AL-300N
ITEM LENGTH/mm
350x181



AL-400N
ITEM LENGTH/mm
530x188



ALA-99N
ITEM LENGTH/mm
560x388



ALA-160N-4
ITEM LENGTH/mm
550x290

Product Introduction

LED LIGHT AND POWER



1. 2835 long working-life, high brightness LED beads
2. color temp. range: 2700-9000K
3. ETL Cert.
4. Voltage: 85V-265V
5. Constant current output
6. Isolation protection against electric shock.



Product Introduction

TEMPERATURE CONTROLLER

1. Working Voltage: AC115V/220-240V 50/60Hz
2. Overall power consumption: < 3W
3. Temp. measurement range: -40℃ -45℃
4. Ambient temp.: 0℃ -60℃
5. Relative humidity: 20%-85% (frost-free)
6. Compressor output: 30A/240VAC Direct drive 1.5HP ac load.
7. Function: Menu setting, Parameters lock, Temperature conversion between centigrade and Fahrenheit; 3 minutes delay of compressor proportion, After sensor's failure, the proportion is stopped, buzzer warning, dual display, High temperature protection of compressor.

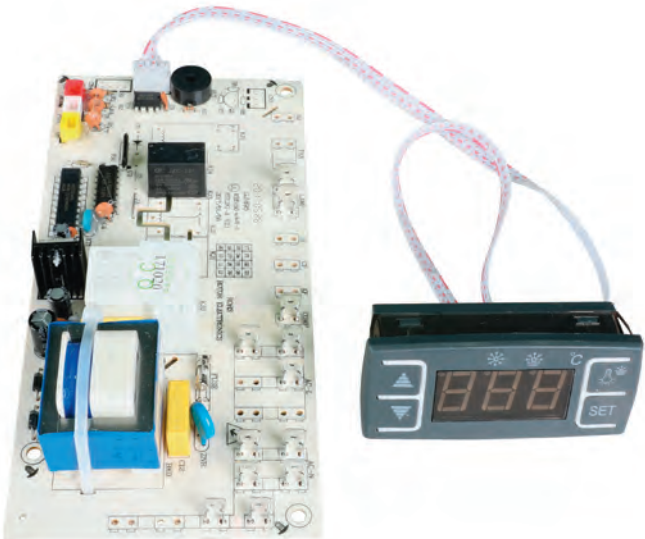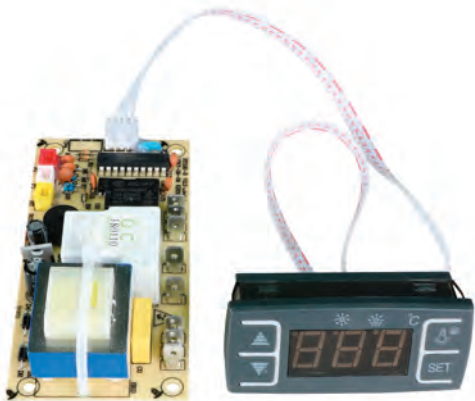

Note

CDIS